Hawa Sliding Solutions

Convertible rooms – just how you like it.

Hawa Concepta III Family



Hawa Concepta III

Hawa Folding Concepta III

On furniture: Sliding solution for furniture doors which can be pivoted, folded, pushed in and parked in a very small space at the side.

Hawa Concepta III family
Redesign of the pivot and folding/ slide-in doors

Designing hardware and systems that are optimally coordinated with current user requirements: In order to do this, Hawa Sliding Solutions is always prepared to go in new directions.

The newly designed Hawa Concepta III family is the perfect example of this. It follows an innovative basic approach: Only making rooms visible when they are needed. Contemporary trends such as lack of urban living space and the associated demand for using living areas in an economical and multi-functional way have been anticipated perfectly in this way.

This is because the Hawa Concepta III and the Hawa Folding Concepta III make it possible to conjure up an office or an entire kitchen from virtually nothing, and make it disappear again. And they reveal themselves to be space economy experts by requiring very little room in the parked position.



The combination of the two systems creates new, exciting design possibilities.



More aesthetics

Design is also always that which you don’t see: With the new Hawa Concepta III family, work surfaces and entire kitchens can be reduced to an elegant, flush front with an even gap pattern. If you prefer a puristic appearance, you can even dispense with handles.



More comfort

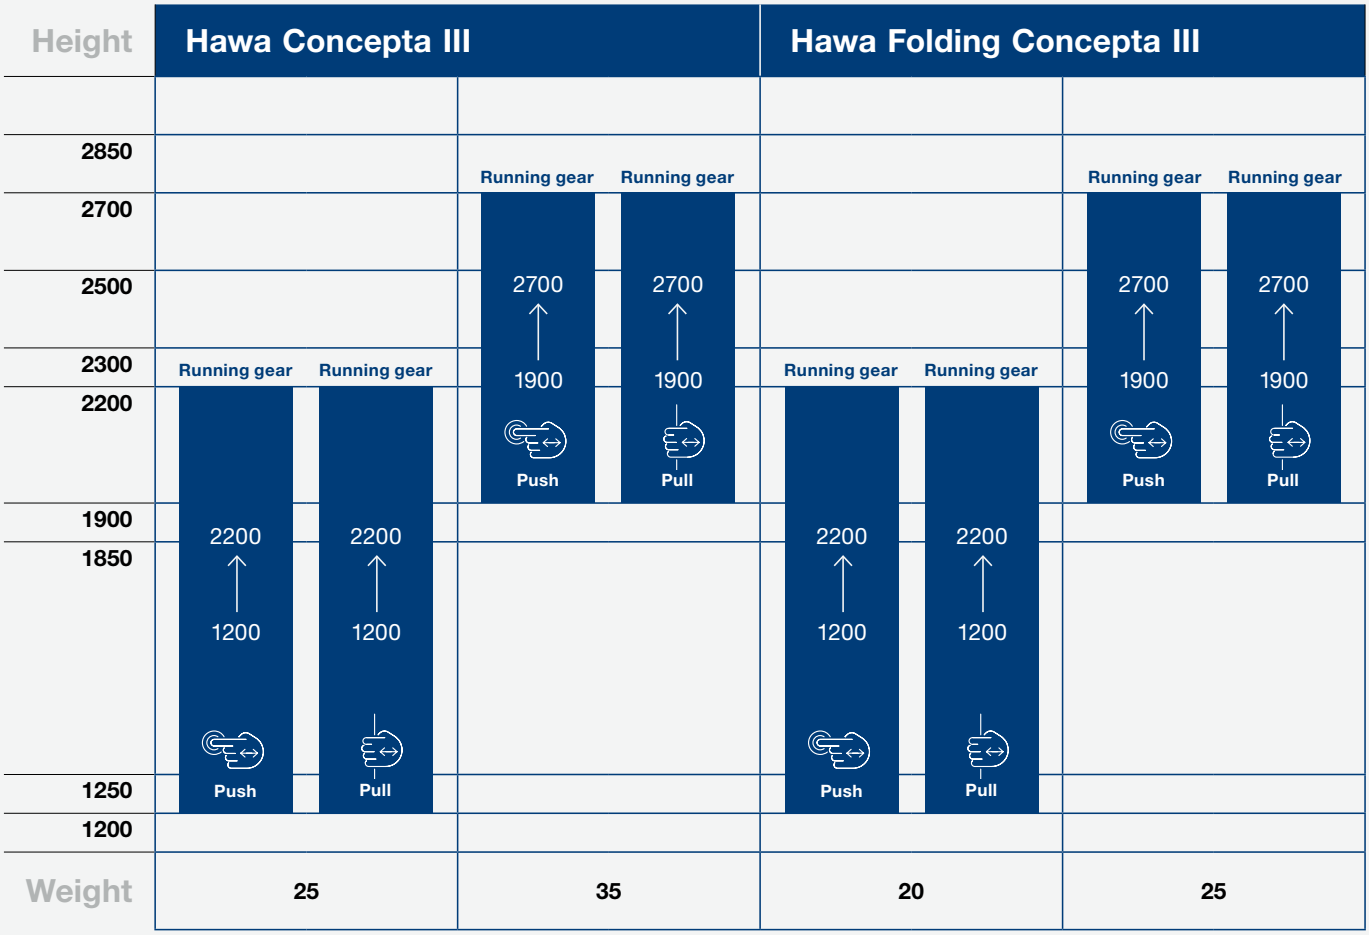
Making the contents of a cabinet disappear within seconds only requires a minimal amount of effort with the Hawa Concepta III technology. The pioneering, patented system guarantees an even, extremely smooth movement with its sophisticated operating assistance.

More efficiency

The qualities of the Hawa Concepta III family are already evident during processing. The high degree of pre-assembly makes installation easier, and the logically positioned, easily accessible adjusting points simplify adjustment, and the entire system therefore supports increased productivity.


Wide range of design options
Rooms have never been as flexible as this

The Hawa Concepta systems of the newest generation display their full quality in the kitchen. They make floor-to-ceiling designs, highboards or wall units with two, three or four doors possible. This gives you almost unlimited creative freedom.



Combinations at your fingertips
A solution for every application

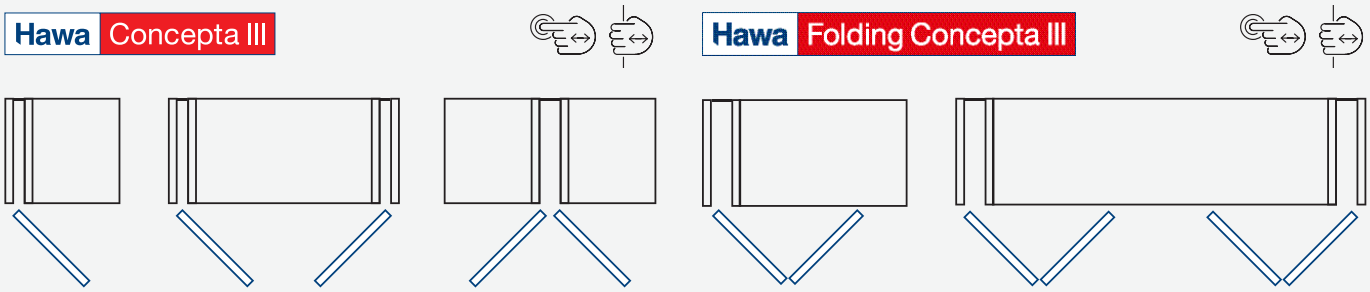The Hawa Concepta III and the Hawa Folding Concepta III can be flexibly combined and implemented in made-to-measure dimensions. In this way, they make variable design solutions possible which are tailored exactly to the room and the type of use.





Open room layout

Washroom, wardrobe, home office or kitchen: The users are free to determine what is usable or visible.



Free access

No doors protruding into the room or standing in the way: This is the guarantee of unrestricted usage.



Large areas

Multi-leaf systems and door heights of up to 2700 mm: This is how entire cabinets and single-line kitchens can be made to disappear and reappear again.

Pivot and folding/slide-in hardware offers many advantages

The new Hawa Concepta III family in brief

Flexibility

Variable door dimensions: half-height to floor-to-ceiling solutions possible, including walk-on solutions

Hawa Concepta III and Hawa Folding Concepta III can be combined, for three-door solutions without separating wall

Comfort

Ergonomic movement support for even, smooth movement

Opening and closing with very little effort – one hand is enough

Reliability

Tested for 40,000 cycles (highest class) and maintenance-free for the entire service life (equivalent to approx. 25 years and the average service life of a pivot/slide-in door)

Fulfils the standard in accordance with DIN EN 1527 and DIN EN 1570

Productivity

Efficient planning with the Hawa configurator

Easy installation thanks to high degree of pre-assembly

Intuitive adjustment with easily accessible adjustment points

Aesthetics

Allows constructions with and without handle

Uniform, flush front design with even gap pattern

Invisible technology

Technical product information


You will find all of the necessary ordering information for the Hawa Concepta III and Hawa Folding Concepta III on the following pages.

Hawa Concepta III	25 Push	see page 7	Hawa Folding Concepta III	20 Push	see page 35
Hawa Concepta III	25 Pull	see page 14	Hawa Folding Concepta III	20 Pull	see page 50
Hawa Concepta III	35 Push	see page 21	Hawa Folding Concepta III	25 Push	see page 65
Hawa Concepta III	35 Pull	see page 28	Hawa Folding Concepta III	25 Pull	see page 80

Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Productivity	Easy installation thanks to high degree of pre-assembly with intuitive adjustment
Comfort	Ergonomic movement support for even, smooth movement
Aesthetics	Cabinet designs without handle – the technology remains invisible

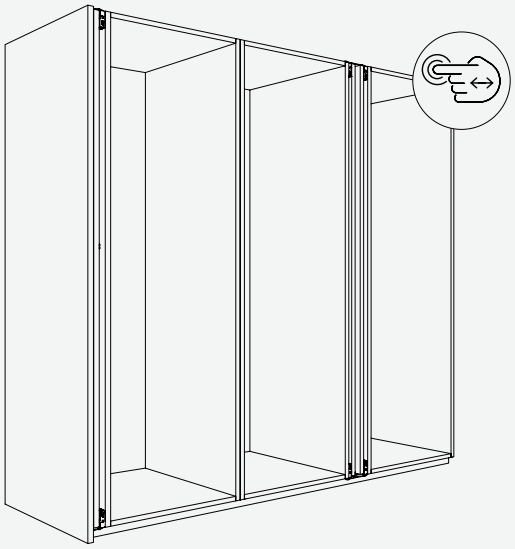


Technical specifications

	6–25 kg (13 to 55 lbs.)
	1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')
	440–750 mm (1' 5 5/16'' to 2' 5 17/32'')
	18–26 mm (23/32'' to 1 1/32'')


Installation examples

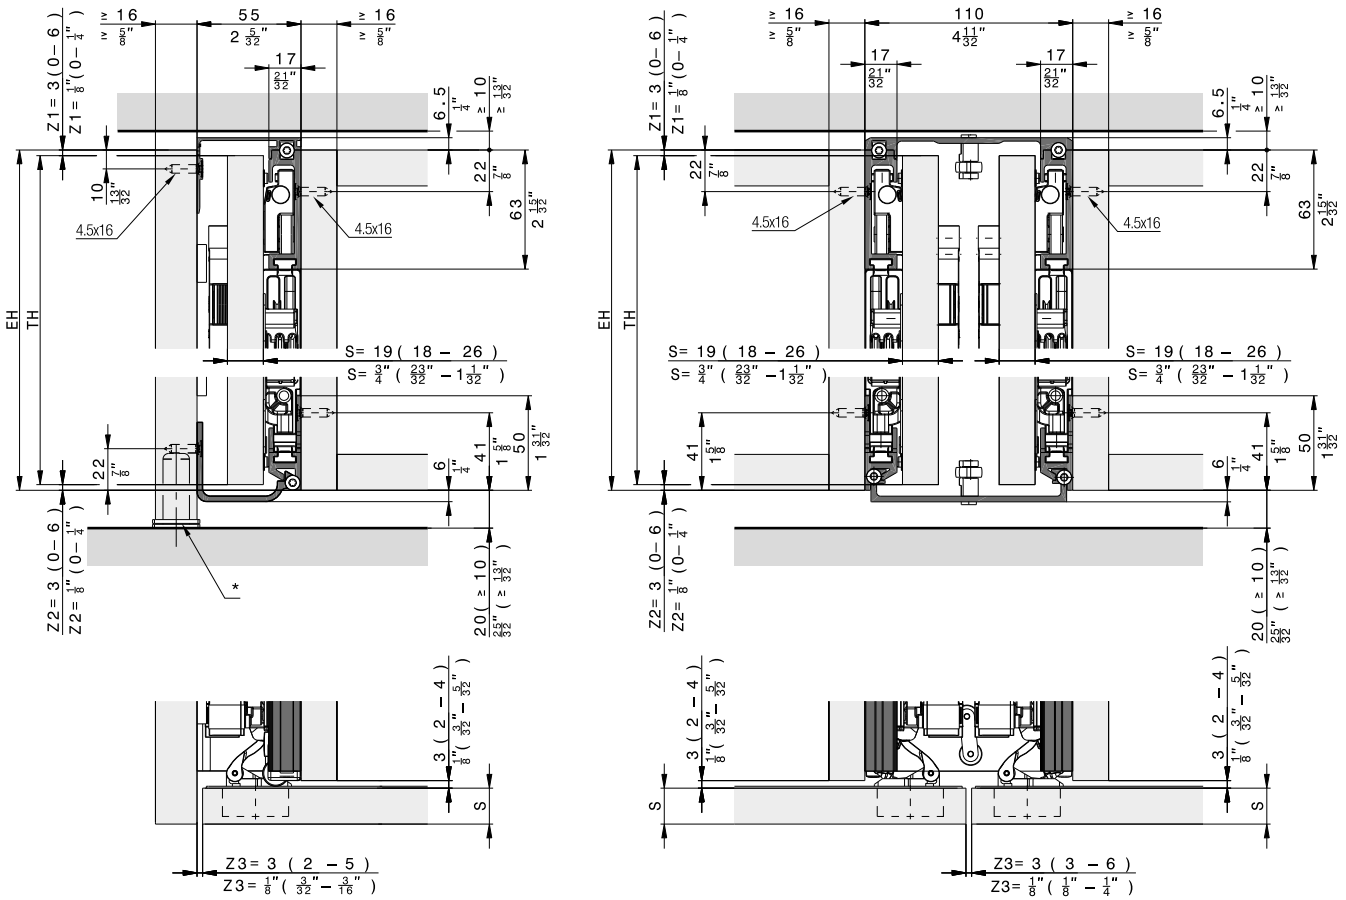
Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 25 Push, left

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Hawa Concepta III 25 Push, right

	No.
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

Door width in mm

Door hight mm	440	500	550	600	650	700	750
2200	25	25	25	25	25	25	24
2150	25	25	25	25	25	25	23
2100	25	25	25	25	25	24	23
2050	25	25	25	25	25	24	22
2000	25	25	25	25	25	23	21
1950	25	25	25	25	24	22	21
1900	25	25	25	25	23	21	20
1850	25	25	25	24	22	21	19
1800	25	25	25	23	21	20	19
1750	25	25	25	22	21	19	18
1700	25	25	24	22	20	19	17
1650	25	25	23	21	19	18	17
1600	25	24	22	20	18	17	16
1550	25	23	21	19	18	16	15
1500	24	22	20	18	17	16	15
1450	23	21	19	17	16	15	14
1400	22	20	18	17	15	14	13
1350	21	19	17	16	15	14	13
1300	20	18	16	15	14	13	12
1250	19	17	15	14	13	12	11
1200	18	16	15	13	12	11	11

Door wight in kg

Maximum weights in kg

Door width in inch

Door hight in inch	1' 5 5/16''	1' 7 11/16''	1' 9 21/32''	1' 11 5/8''	2' 1 19/32''	2' 3 9/16''	2' 5 17/32''
7' 2 5/8''	55	55	55	55	55	55	53
7' 21/32''	55	55	55	55	55	55	51
6'10 11/16''	55	55	55	55	55	53	51
6' 8 23/32''	55	55	55	55	55	53	49
6' 6 3/4''	55	55	55	55	55	51	46
6' 4 25/32''	55	55	55	55	53	49	46
6' 2 13/16''	55	55	55	55	51	46	44
6' 27/32''	55	55	55	53	49	46	42
5' 10 7/8''	55	55	55	51	46	44	42
5' 8 29/32''	55	55	55	49	46	42	40
5' 6 15/16''	55	55	53	49	44	42	37
5' 4 31/32''	55	55	51	46	42	40	37
5' 3''	55	53	49	44	40	37	35
5' 1 1/32''	55	51	46	42	40	35	33
4' 11 1/16''	53	49	44	40	37	35	33
4' 9 3/32''	51	46	42	37	35	33	31
4' 7 1/8''	49	44	40	37	33	31	29
4' 5 5/32''	46	42	37	35	33	31	29
4' 3 3/16''	44	40	35	33	31	29	26
4' 1 7/32''	42	37	33	31	29	26	24
3' 11 1/4''	40	35	33	29	26	24	24

Door wight in lbs.

Maximum weights in lbs.

Hawa Configurator

www.hawa.com/configurator →





Subject to technical modifications. Metric specifications are exact. Inches are approximate.

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995




Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2’ 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2’ 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2’ 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16''x5/8''), set of 16 pieces , incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2’ 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2’ 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999






Set consisting of:

		30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Uprights

	Nr.
 Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories frome page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073


Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076

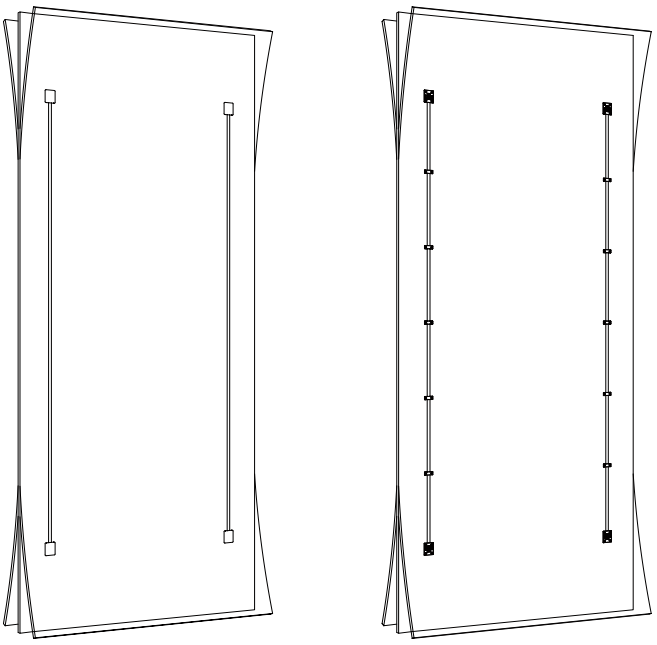
Straightening fitting




Subject to technical modifications. Metric specifications are exact. Inches are approximate.

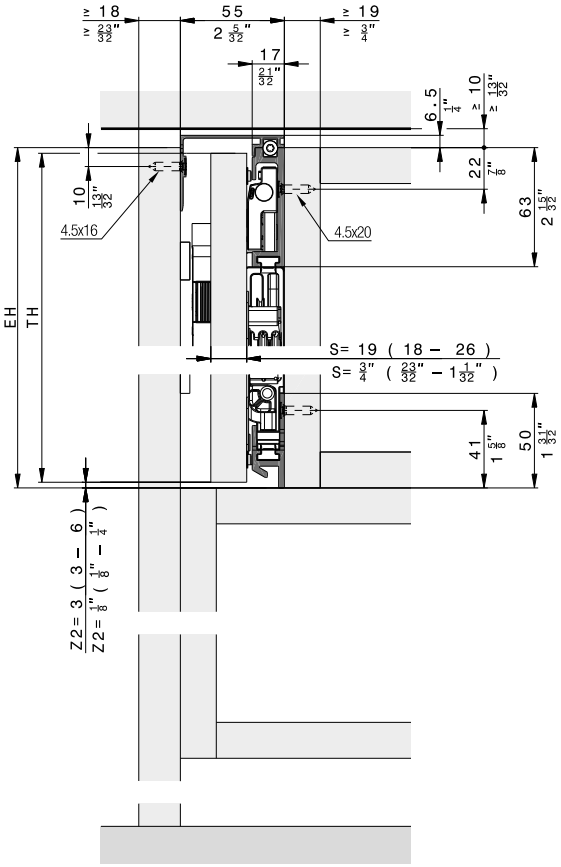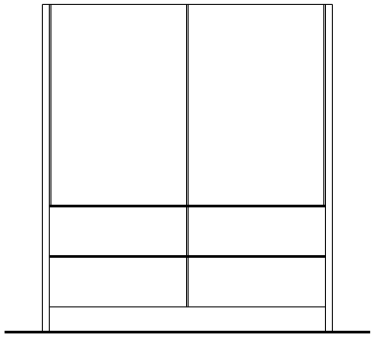
Further installation examples
Composed cabinet









Cabinet without base panel

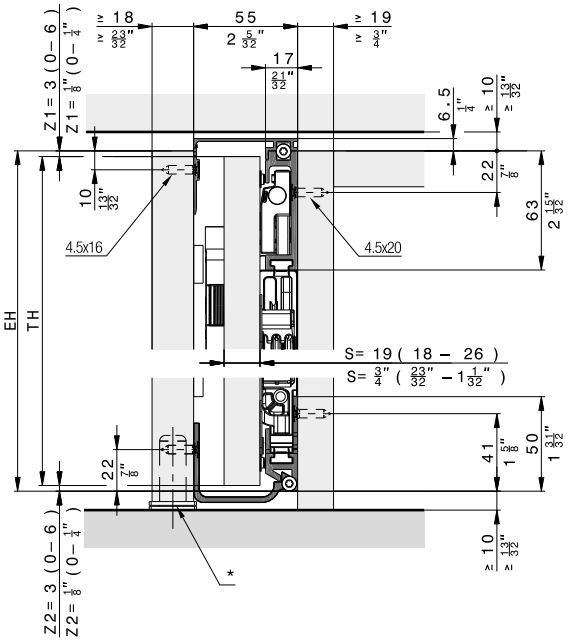

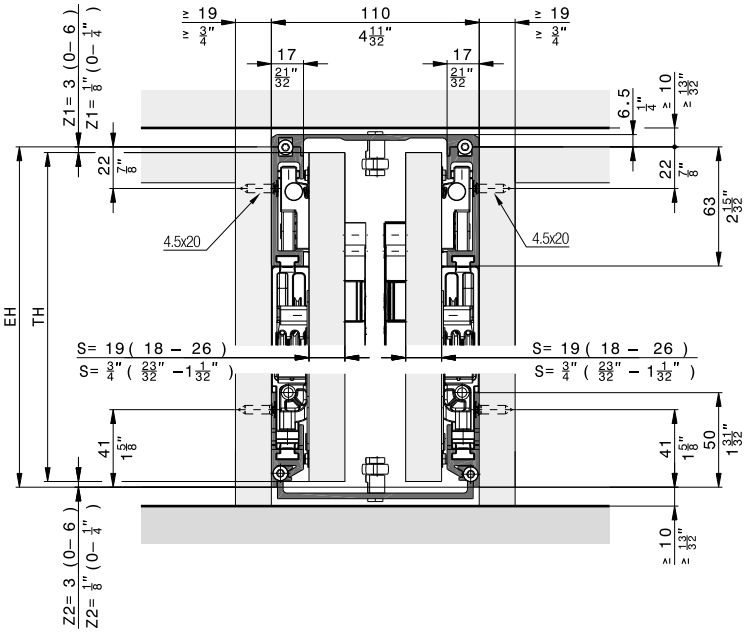


* Recommendation: Use adjustable foot

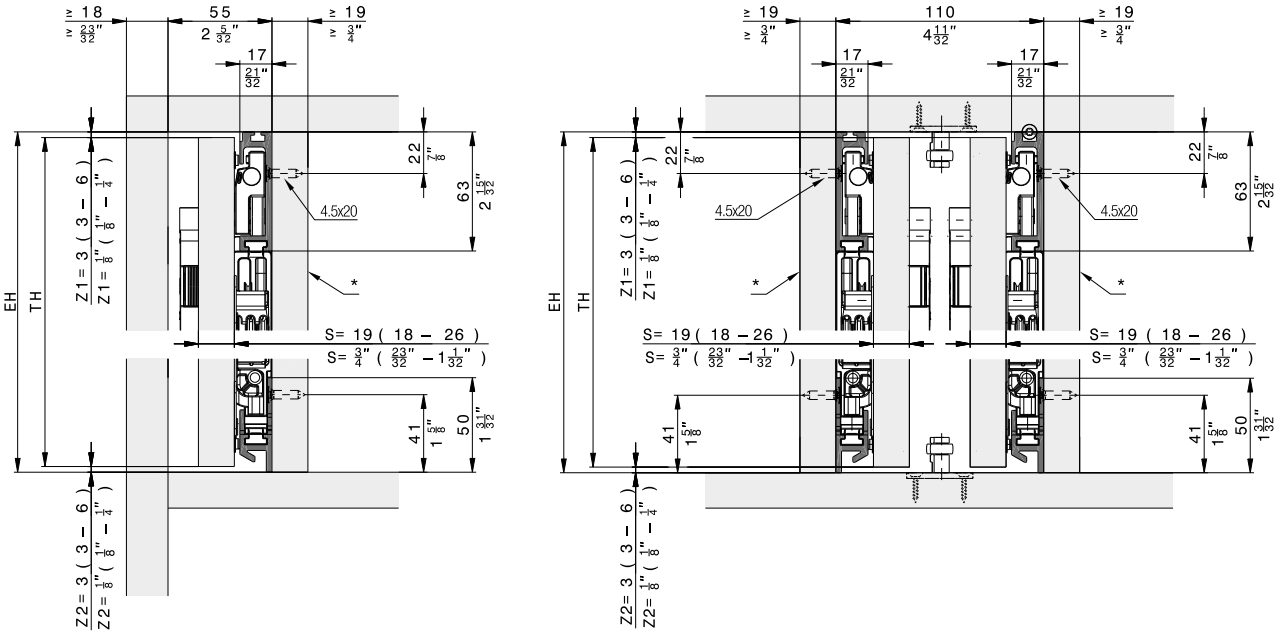Inlaid doors



* removable

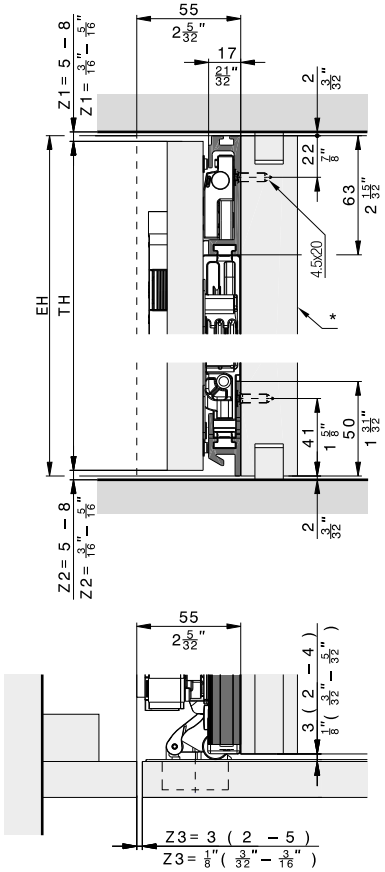
Floor-to-ceiling doors



* removable

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

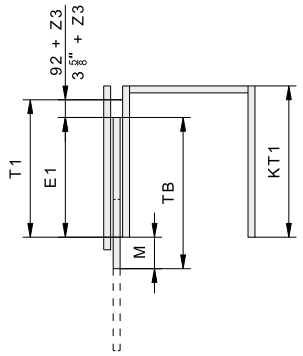
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 5/16"

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 5/8" + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + 1/8" ≤TB - 1 19/32"

Door flush with outer face



Protruding door

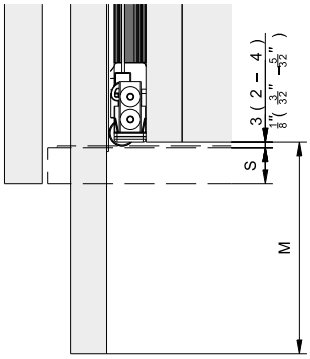


Hardware for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

Productivity Easy installation thanks to high degree of pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even, smooth movement

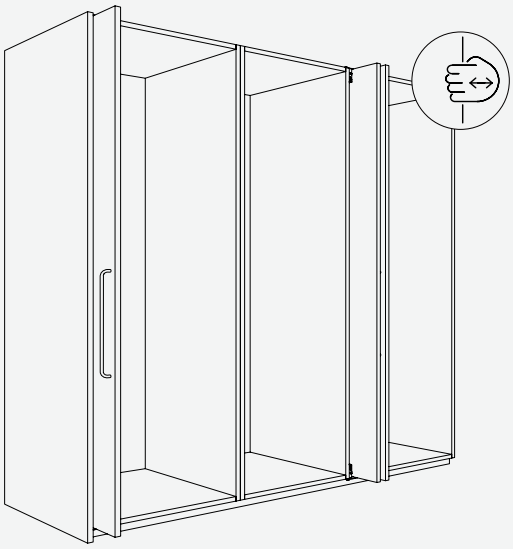Aesthetics Allows constructions with and without handle – the technology remains invisible



Technical specifications

6–25 kg (13 to 55 lbs.)

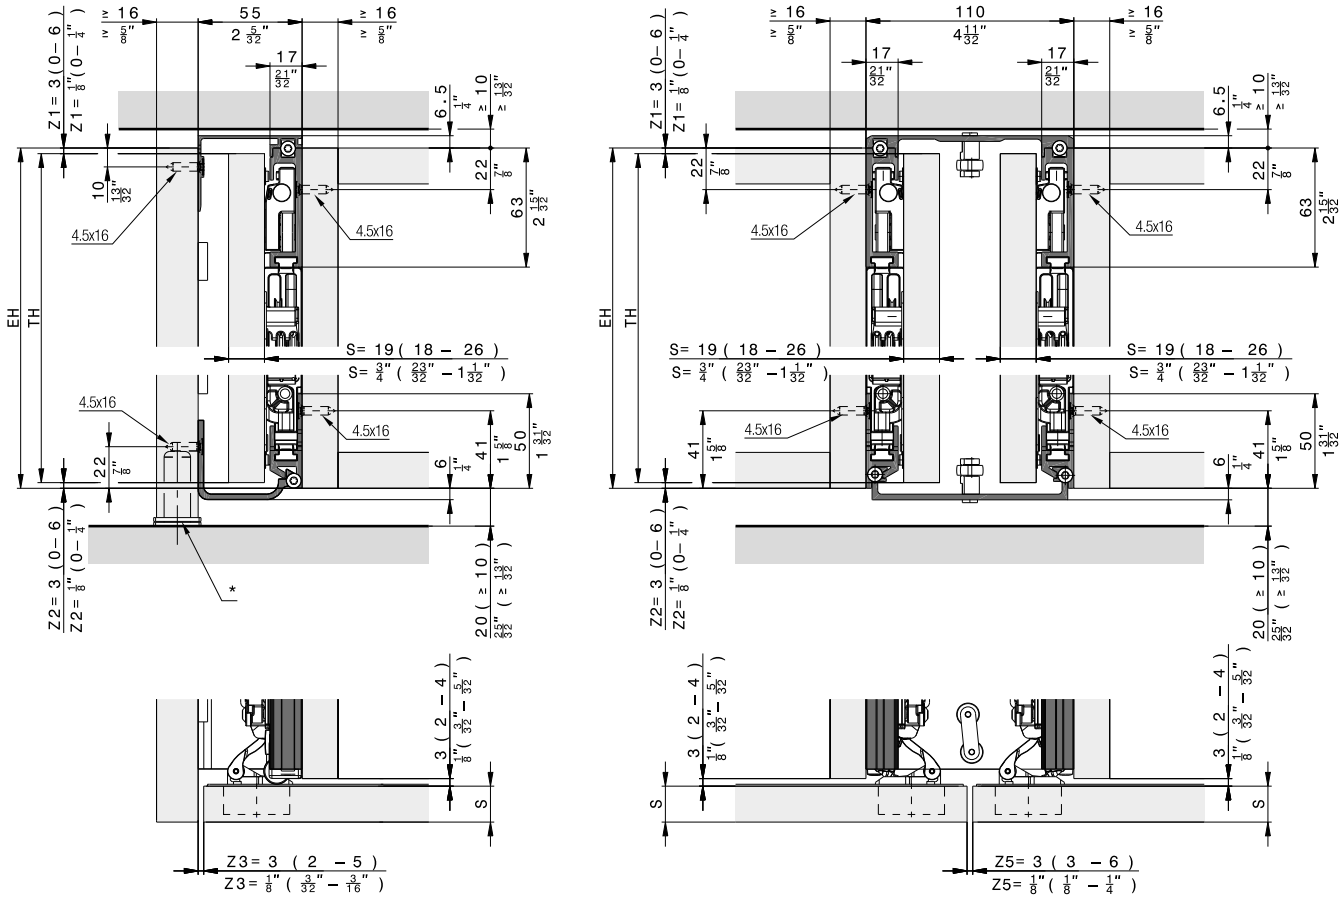
1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

18–26 mm (23/32'' to 1 1/32'')

Installation examples


Door striking against the top and bottom cabinet sections




* Recommendation: Use adjustable foot

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Components required for one cabinet





Hawa Concepta III 25 Pull, left

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Hawa Concepta III 25 Pull, right

	No.
Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

Door width in mm

Door hight mm \	440	500	550	600	650	700	750
2200	25	25	25	25	25	25	24
2150	25	25	25	25	25	25	23
2100	25	25	25	25	25	24	23
2050	25	25	25	25	25	24	22
2000	25	25	25	25	25	23	21
1950	25	25	25	25	24	22	21
1900	25	25	25	25	23	21	20
1850	25	25	25	24	22	21	19
1800	25	25	25	23	21	20	19
1750	25	25	25	22	21	19	18
1700	25	25	24	22	20	19	17
1650	25	25	23	21	19	18	17
1600	25	24	22	20	18	17	16
1550	25	23	21	19	18	16	15
1500	24	22	20	18	17	16	15
1450	23	21	19	17	16	15	14
1400	22	20	18	17	15	14	13
1350	21	19	17	16	15	14	13
1300	20	18	16	15	14	13	12
1250	19	17	15	14	13	12	11
1200	18	16	15	13	12	11	11

Door wight in kg

Maximum weights in kg

Door width in inch

Door hight in inch \	1' 5 5/16''	1' 7 11/16''	1' 9 21/32''	1' 11 5/8''	2' 1 19/32''	2' 3 9/16''	2' 5 17/32''
7' 2 5/8''	55	55	55	55	55	55	53
7' 21/32''	55	55	55	55	55	55	51
6' 10 11/16''	55	55	55	55	55	53	51
6' 8 23/32''	55	55	55	55	55	53	49
6' 6 3/4''	55	55	55	55	55	51	46
6' 4 25/32''	55	55	55	55	53	49	46
6' 2 13/16''	55	55	55	55	51	46	44
6' 27/32''	55	55	55	53	49	46	42
5' 10 7/8''	55	55	55	51	46	44	42
5' 8 29/32''	55	55	55	49	46	42	40
5' 6 15/16''	55	55	53	49	44	42	37
5' 4 31/32''	55	55	51	46	42	40	37
5' 3''	55	53	49	44	40	37	35
5' 1 1/32''	55	51	46	42	40	35	33
4' 11 1/16''	53	49	44	40	37	35	33
4' 9 3/32''	51	46	42	37	35	33	31
4' 7 1/8''	49	44	40	37	33	31	29
4' 5 5/32''	46	42	37	35	33	31	29
4' 3 3/16''	44	40	35	33	31	29	26
4' 1 7/32''	42	37	33	31	29	26	24
3' 11 1/4''	40	35	33	29	26	24	24

Door wight in lbs.

Maximum weights in lbs.

Hawa Configurator





www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995



Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2’ 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2’ 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2’ 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16''x5/8''), set of 16 pieces , incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2’ 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2’ 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, rightt	31001

Set consisting of:






		31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights


	Nr.
 Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680


Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de


Straightening fitting

→ Details under accessories frome page 327


Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073


Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

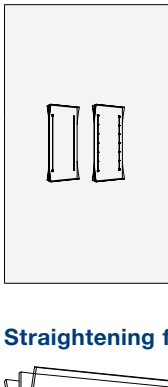
Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076

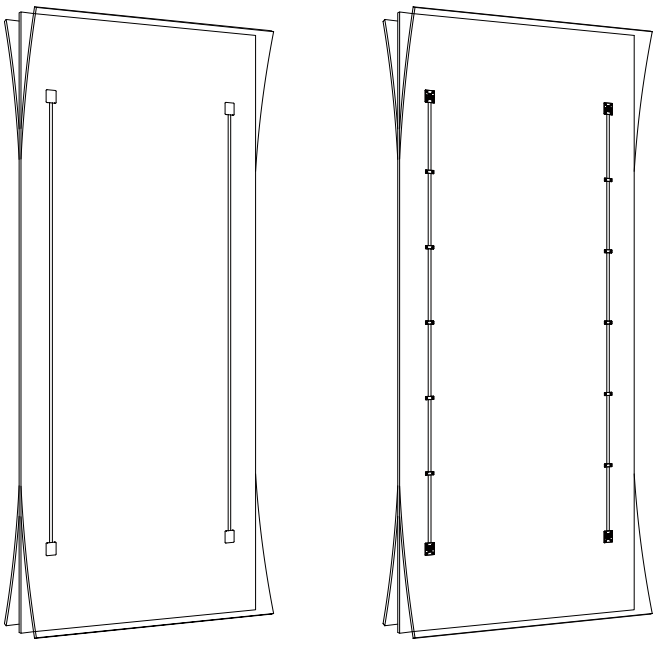
Straightening fitting



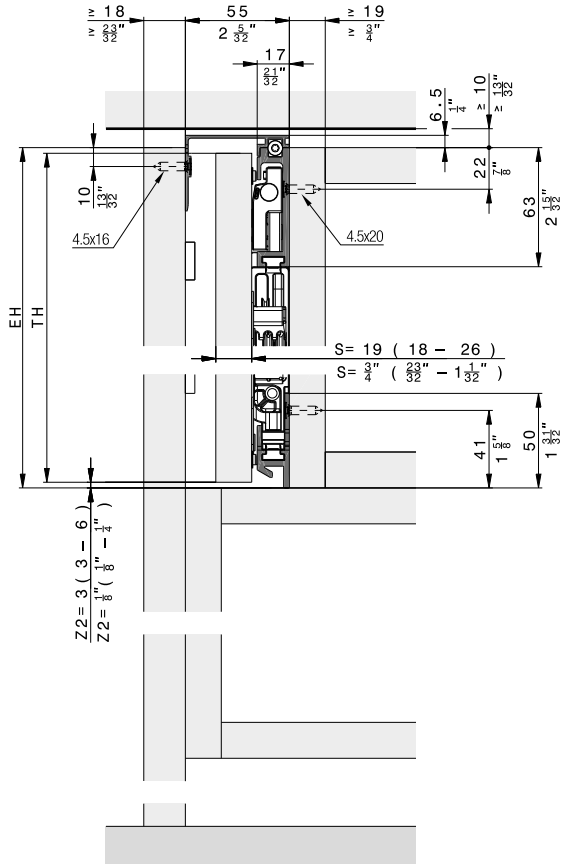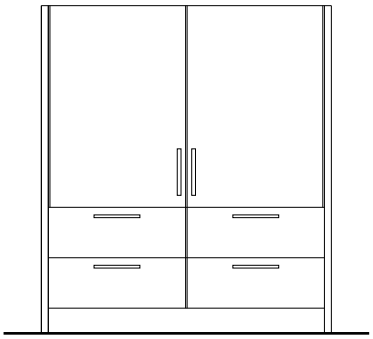
Further installation examples
Composed cabinet








Cabinet without base panel

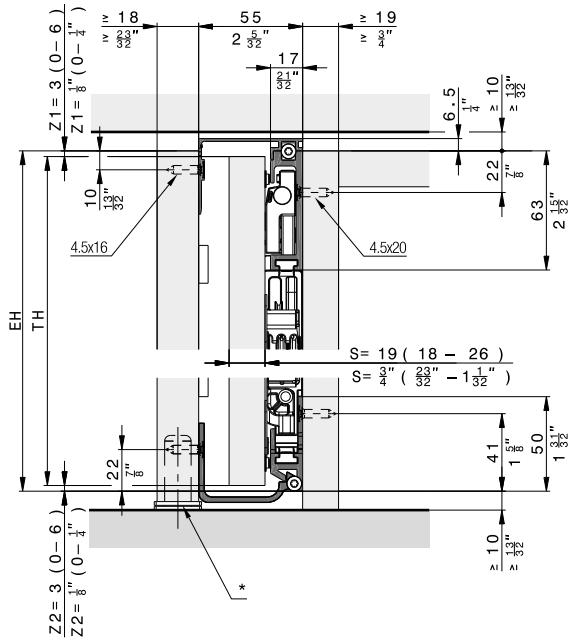


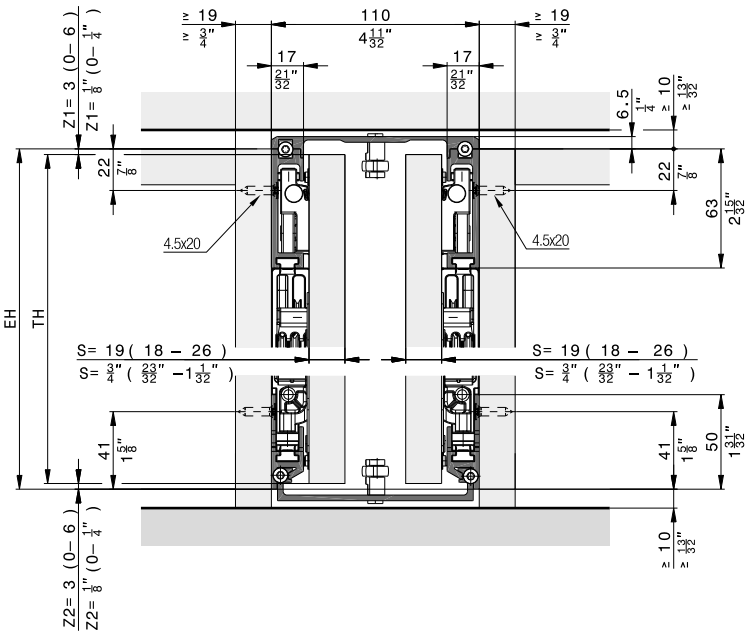

* Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

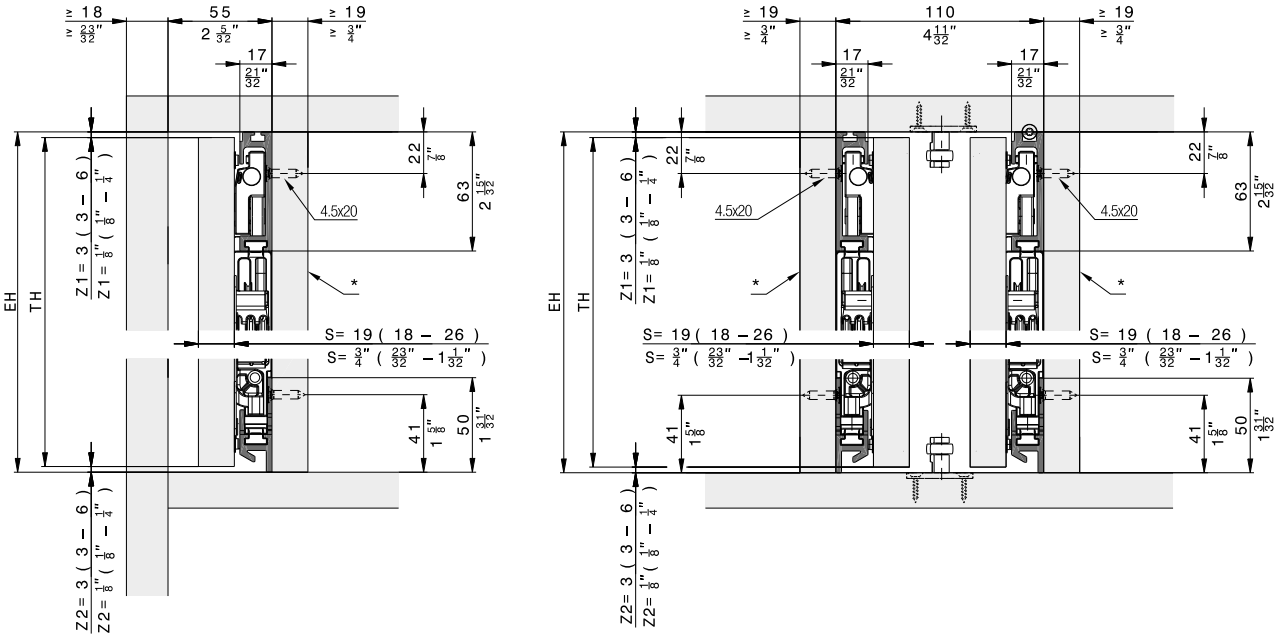Inlaid doors




* removable

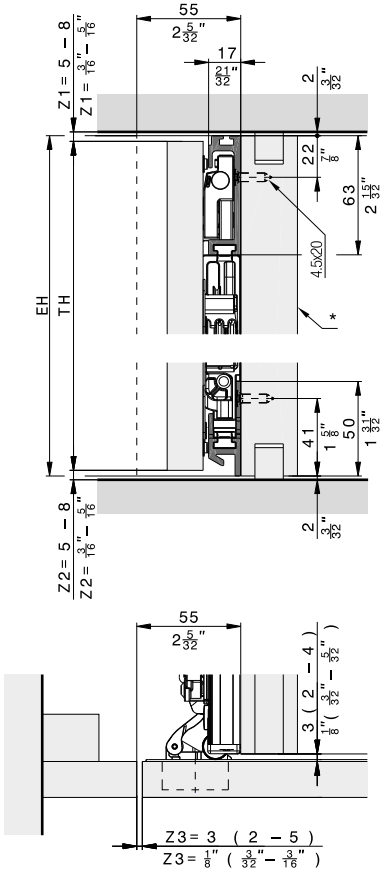Floor-to-ceiling doors



* removable

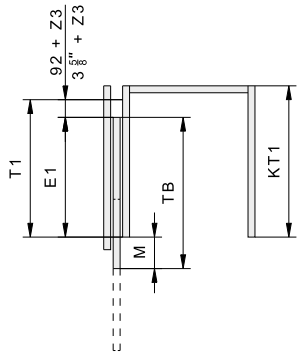
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 5/16"

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 5/8" + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + 1/8" ≤TB - 1 19/32"

Door flush with outer face



Protruding door

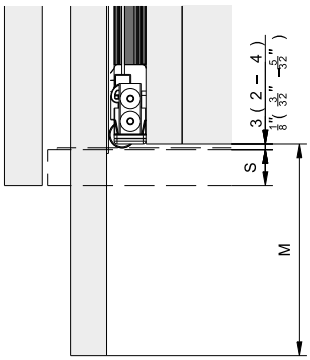

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

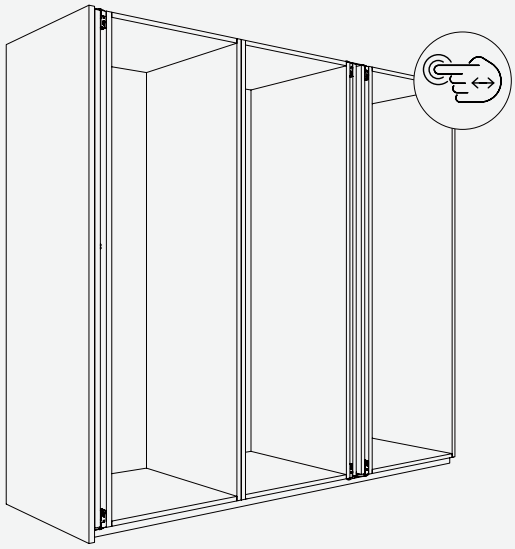
Fitting for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Productivity Easy installation thanks to high degree of pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even, smooth movement

Aesthetics Cabinet designs without handle – the technology remains invisible



Technical specifications

10–35 kg (22 to 77 lbs.)

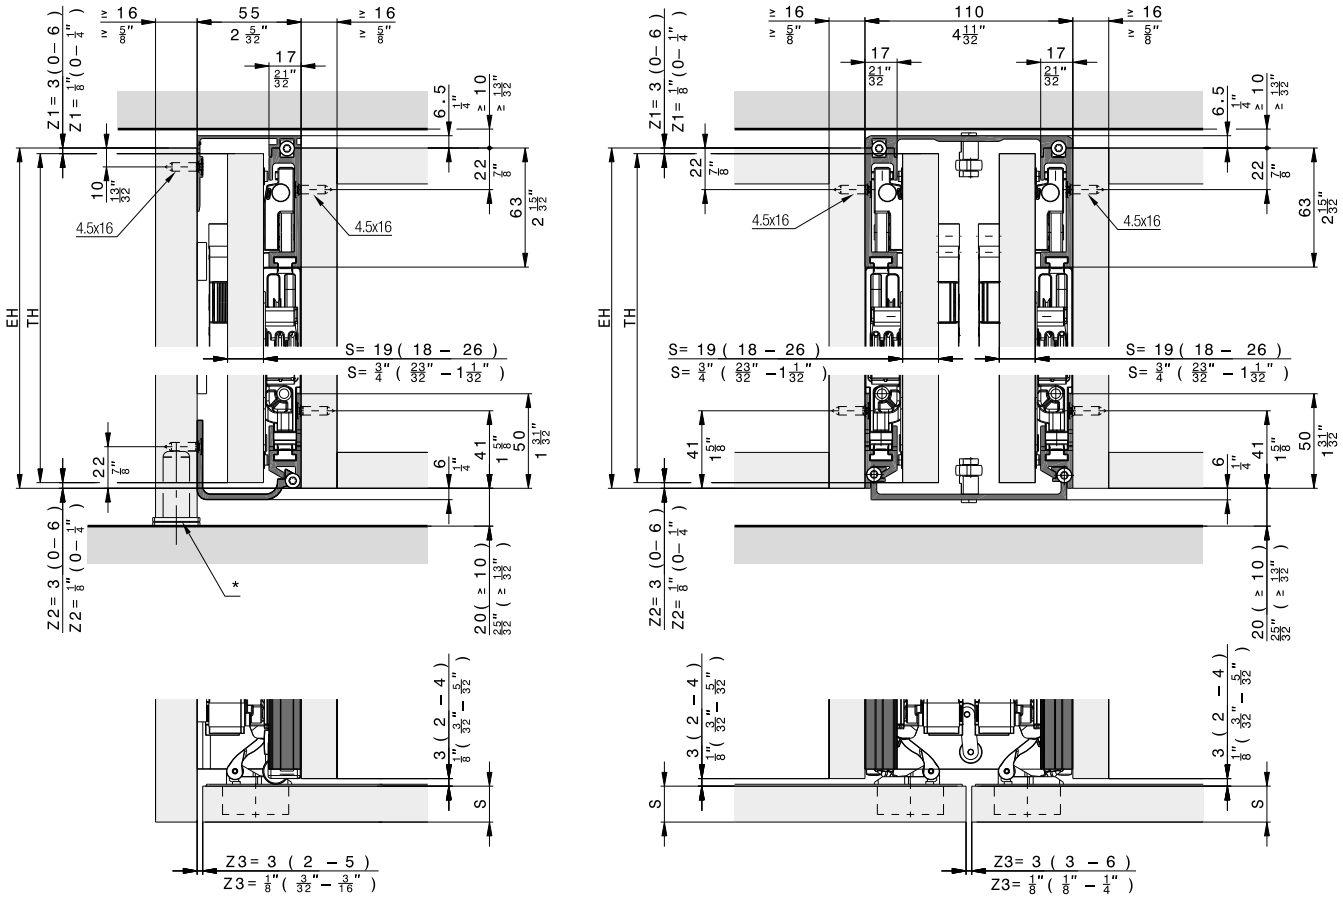
1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

18–26 mm (23/32'' to 1 1/32'')


Installation examples


Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 35 Push, left

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Hawa Concepta III 35 Push, right

	No.
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

Door width in mm

Door hight mm \ Door wight in kg	440	500	550	600	650	700	750
2700	35	35	35	35	35	35	35
2650	35	35	35	35	35	35	35
2600	35	35	35	35	35	35	35
2550	35	35	35	35	35	35	35
2500	35	35	35	35	35	35	35
2450	35	35	35	35	35	35	34
2400	35	35	35	35	35	35	33
2350	35	35	35	35	35	34	32
2300	35	35	35	35	35	34	31
2250	35	35	35	35	35	33	31
2200	35	35	35	35	34	32	30
2150	35	35	35	35	33	31	29
2100	35	35	35	35	32	30	28
2050	35	35	35	34	31	29	27
2000	35	35	35	33	30	28	26
1950	35	35	35	32	29	27	26
1900	35	35	34	31	29	27	25

Maximum weights in kg

Door width in inch

Door hight in inch \ Door wight in lbs.	1' 5 5/16''	1' 7 11/16''	1' 9 21/32''	1' 11 5/8''	2' 1 19/32''	2' 3 9/16''	2' 5 17/32''
8' 10 5/16''	77	77	77	77	77	77	77
8' 8 11/32''	77	77	77	77	77	77	77
8' 6 3/8''	77	77	77	77	77	77	77
8' 4 13/32''	77	77	77	77	77	77	77
8' 2 7/16''	77	77	77	77	77	77	77
8' 15/32''	77	77	77	77	77	77	75
7' 10 1/2''	77	77	77	77	77	77	73
7' 8 17/32''	77	77	77	77	77	75	71
7' 6 9/16''	77	77	77	77	77	75	68
7' 4 19/32''	77	77	77	77	77	73	68
7' 2 5/8''	77	77	77	77	75	71	66
7' 21/32''	77	77	77	77	73	68	64
6' 10 11/16''	77	77	77	77	71	66	62
6' 8 33/32''	77	77	77	75	68	64	60
6' 6 3/4''	77	77	77	73	66	62	57
6' 4 25/32''	77	77	77	71	64	60	57
6' 2 13/16''	77	77	75	68	64	60	55

Maximum weights in lbs.

Hawa Configurator

www.hawa.com/configurator →





Subject to technical modifications. Metric specifications are exact. Inches are approximate.

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997




Set consisting of:

		30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16''x5/8''), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999






Set consisting of:

		30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827


Uprights

	Nr.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories frome page 327

Aluminum, untreated

		Nr.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079


Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081

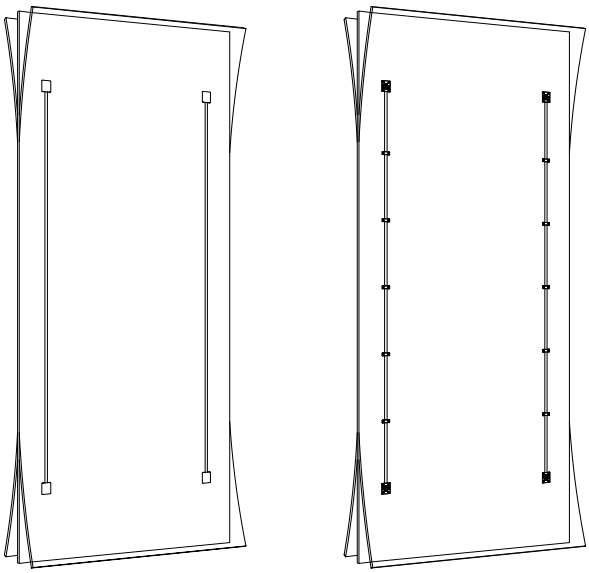
Straightening fitting





Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Further installation examples

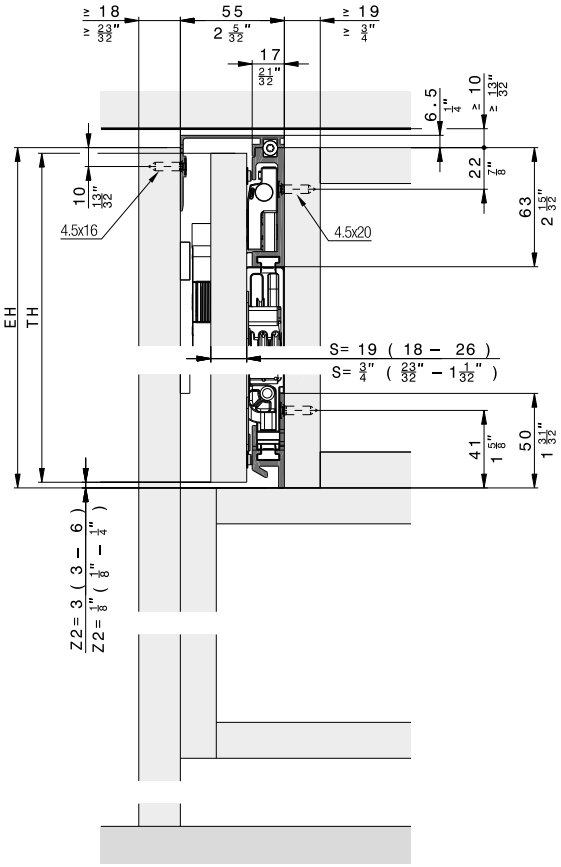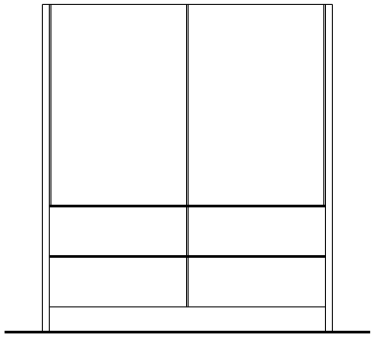
Composed cabinet









Cabinet without base panel

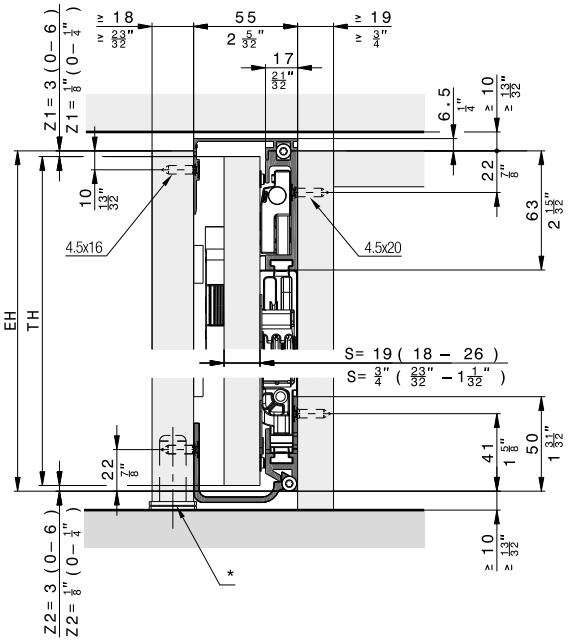

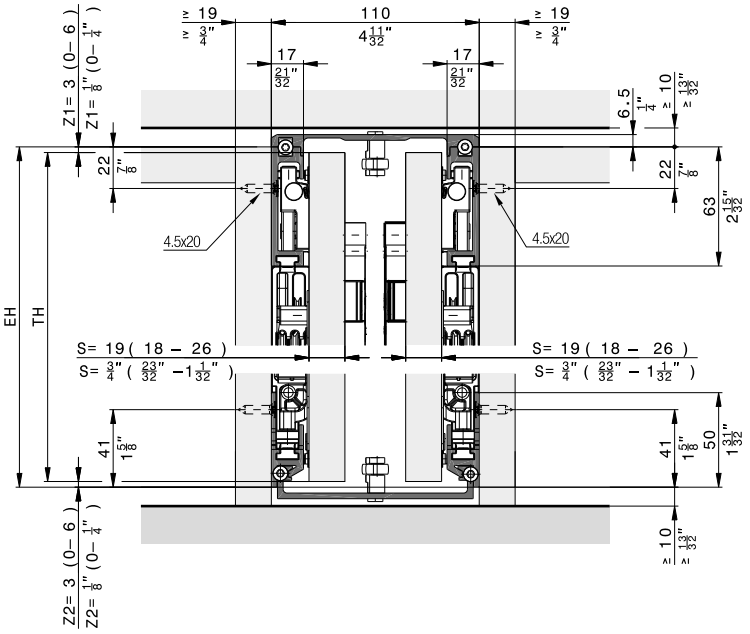


* Recommendation: Use adjustable foot

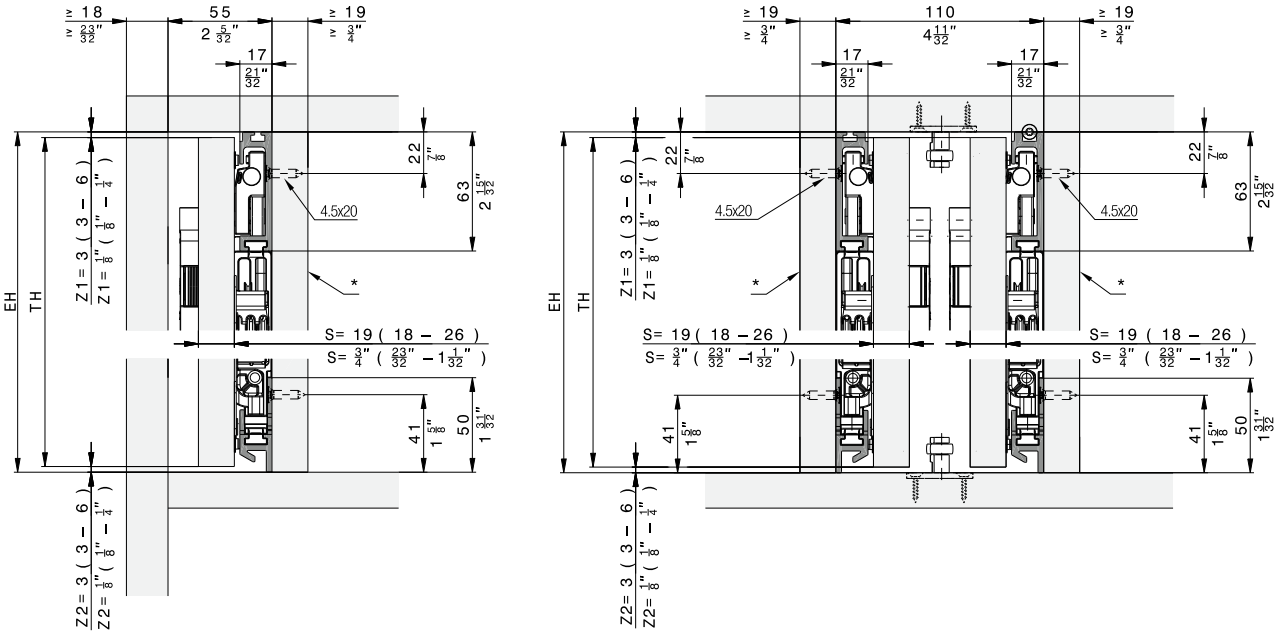Inlaid doors



* removable

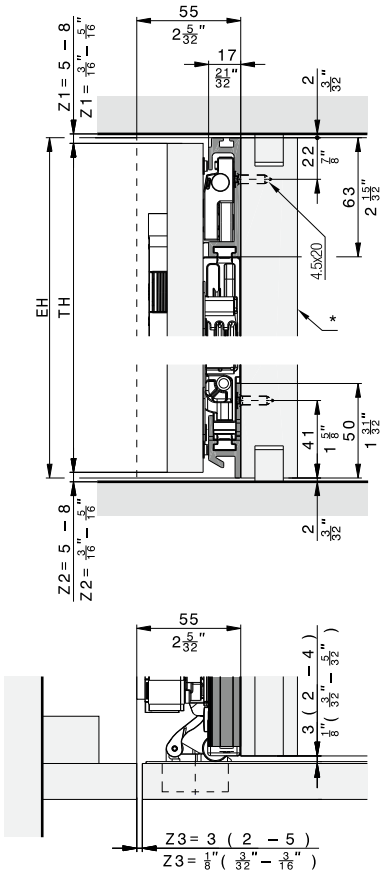
Floor-to-ceiling doors



* removable

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

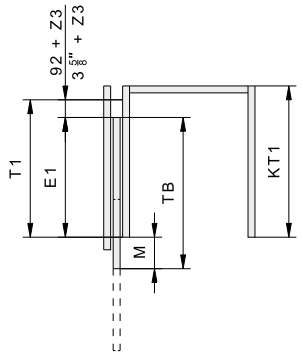
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 5/16"

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 5/8" + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + 1/8" ≤TB - 1 19/32"

Door flush with outer face



Protruding door

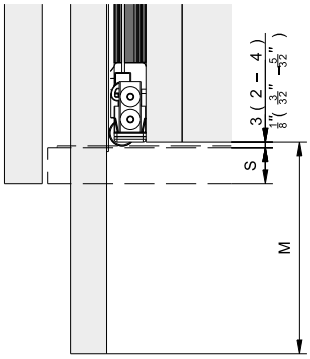


Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

Productivity Easy installation thanks to high degree of pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even, smooth movement

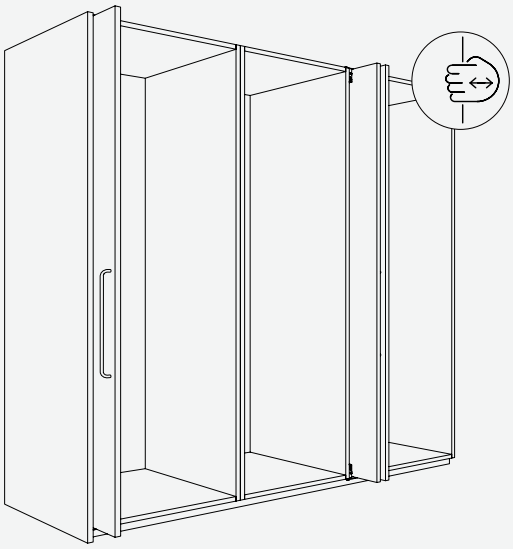Aesthetics Allows constructions with and without handle – the technology remains invisible



Technical specifications

10–35 kg (22 to 77 lbs.)

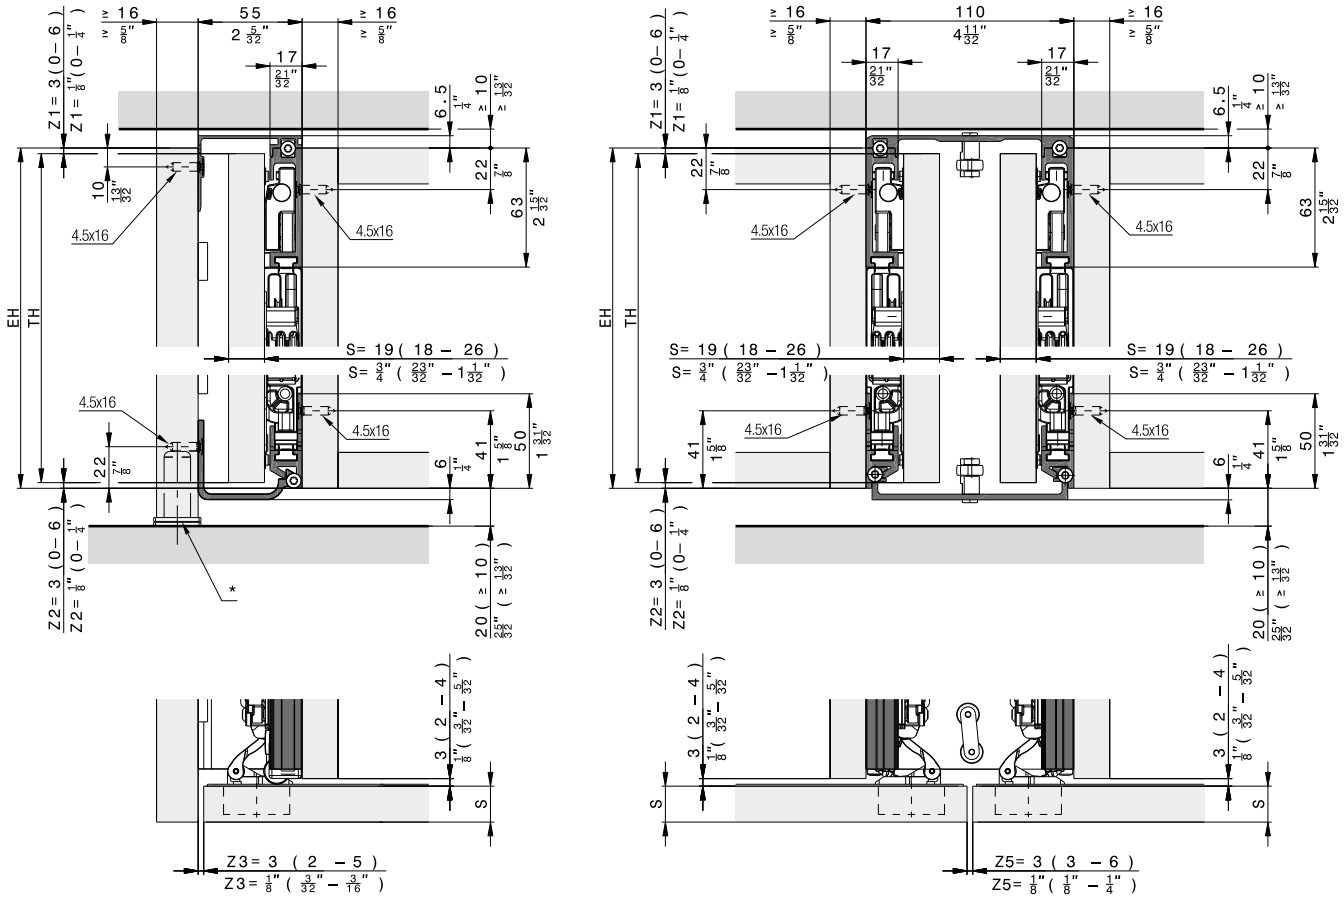
1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

18–26 mm (23/32'' to 1 1/32'')

Installation examples


Door striking against the top and bottom cabinet sections




* Recommendation: Use adjustable foot

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Components required for one cabinet





Hawa Concepta III 35 Pull, left

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Hawa Concepta III 35 Pull, right

	No.
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

Door width in mm

Door hight mm \ Door wight in kg	440	500	550	600	650	700	750
2700	35	35	35	35	35	35	35
2650	35	35	35	35	35	35	35
2600	35	35	35	35	35	35	35
2550	35	35	35	35	35	35	35
2500	35	35	35	35	35	35	35
2450	35	35	35	35	35	35	34
2400	35	35	35	35	35	35	33
2350	35	35	35	35	35	34	32
2300	35	35	35	35	35	34	31
2250	35	35	35	35	35	33	31
2200	35	35	35	35	34	32	30
2150	35	35	35	35	33	31	29
2100	35	35	35	35	32	30	28
2050	35	35	35	34	31	29	27
2000	35	35	35	33	30	28	26
1950	35	35	35	32	29	27	26
1900	35	35	34	31	29	27	25

Maximum weights in kg

Door width in inch

Door hight in inch \ Door wight in lbs.	1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"
8' 10 5/16"	77	77	77	77	77	77	77
8' 8 11/32"	77	77	77	77	77	77	77
8' 6 3/8"	77	77	77	77	77	77	77
8' 4 13/32"	77	77	77	77	77	77	77
8' 2 7/16"	77	77	77	77	77	77	77
8' 15/32"	77	77	77	77	77	77	75
7' 10 1/2"	77	77	77	77	77	77	73
7' 8 17/32"	77	77	77	77	77	75	71
7' 6 9/16"	77	77	77	77	77	75	68
7' 4 19/32"	77	77	77	77	77	73	68
7' 2 5/8"	77	77	77	77	75	71	66
7' 21/32"	77	77	77	77	73	68	64
6' 10 11/16"	77	77	77	77	71	66	62
6' 8 33/32"	77	77	77	75	68	64	60
6' 6 3/4"	77	77	77	73	66	62	57
6' 4 25/32"	77	77	77	71	64	60	57
6' 2 13/16"	77	77	75	68	64	60	55

Maximum weights in lbs.




Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets



Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997

Set consisting of:		30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2’ 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2’ 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2’ 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16''x5/8''), set of 16 pieces , incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2’ 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2’ 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001






Set consisting of:		31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

		Nr.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories frome page 327

Aluminum, untreated

		Nr.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079


Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081

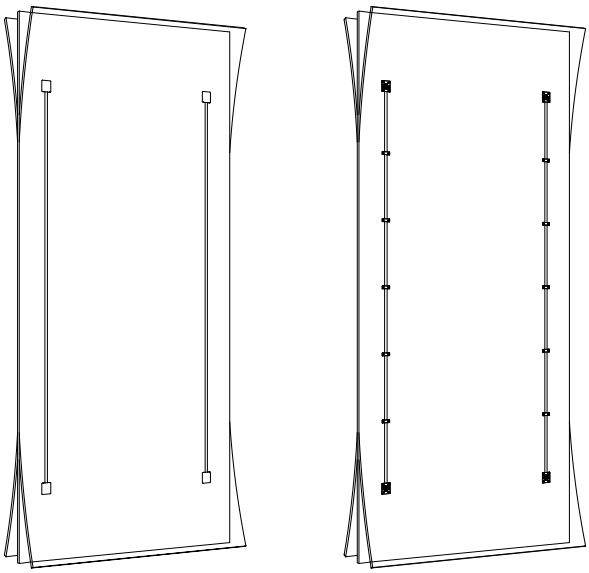
Straightening fitting




Further installation examples

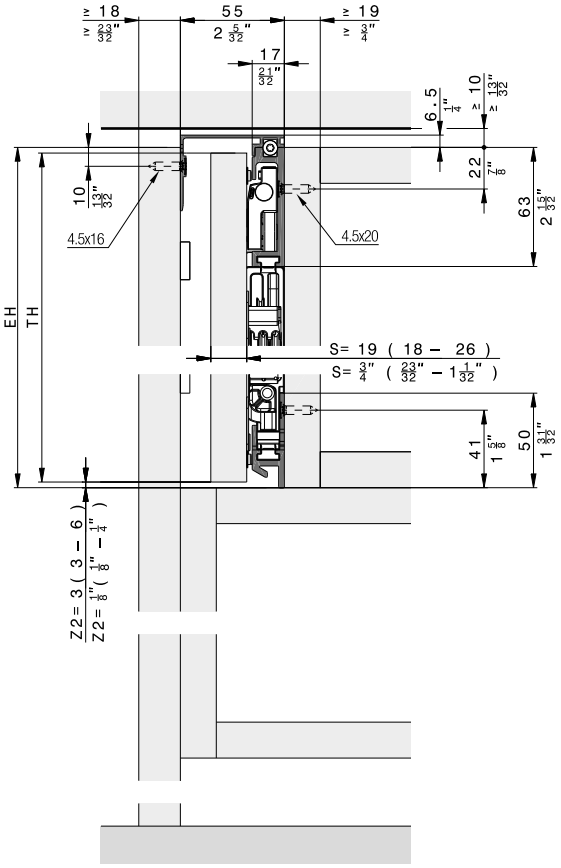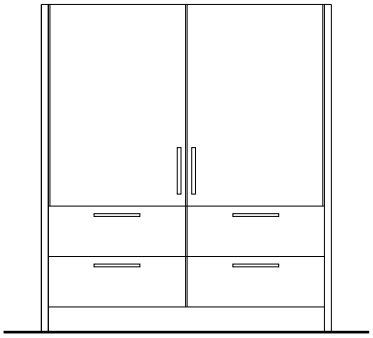
Composed cabinet








Cabinet without base panel

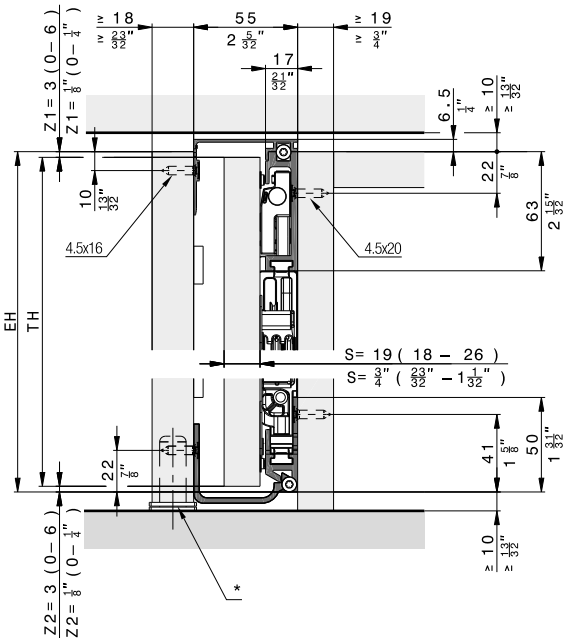


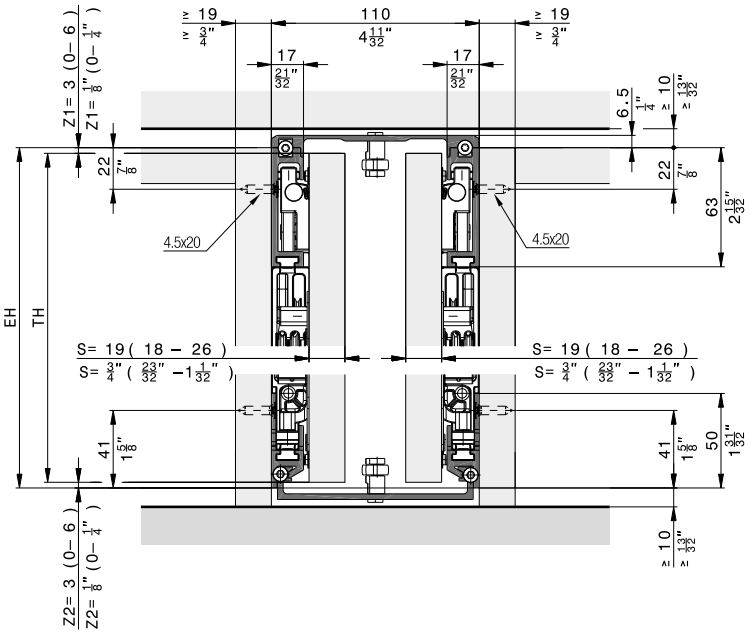

* Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

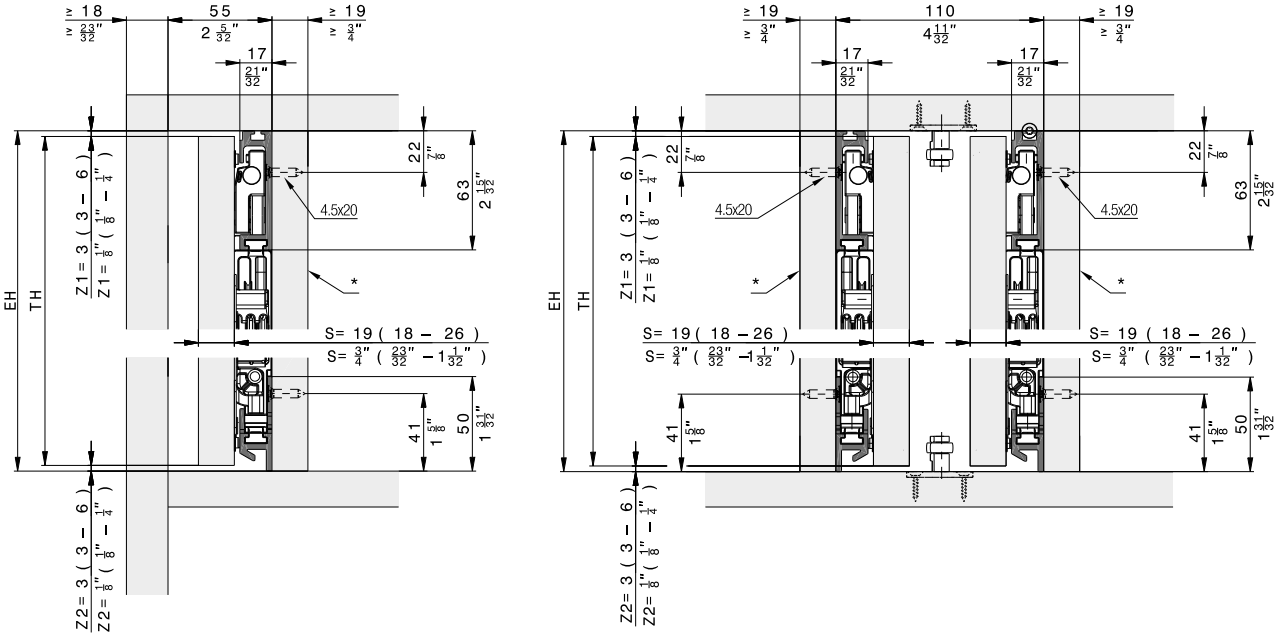Inlaid doors




* removable

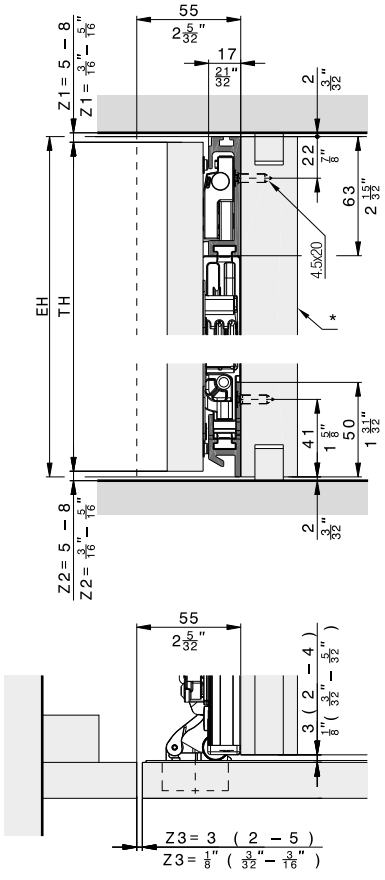Floor-to-ceiling doors



* removable

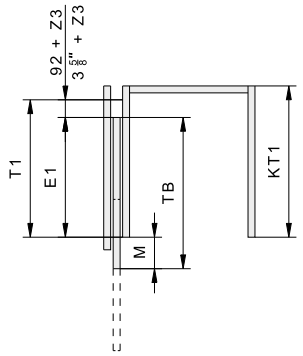
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 5/16"

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 5/8" + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + 1/8" ≤TB - 1 19/32"

Door flush with outer face



Protruding door

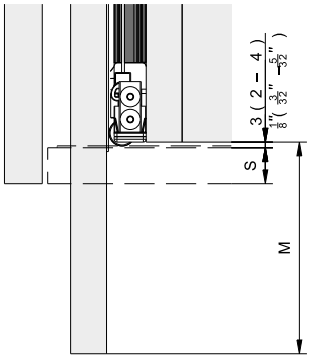

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

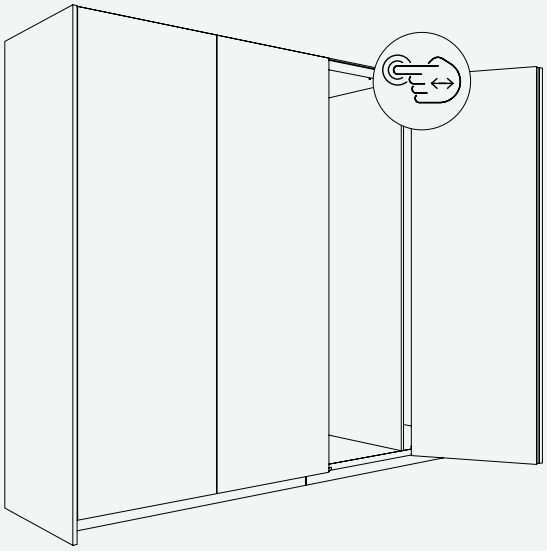
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Flexibility Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of pre-assembly and intuitive adjustment

Aesthetics Cabinet designs without handle – the technology remains invisible



Technical specifications

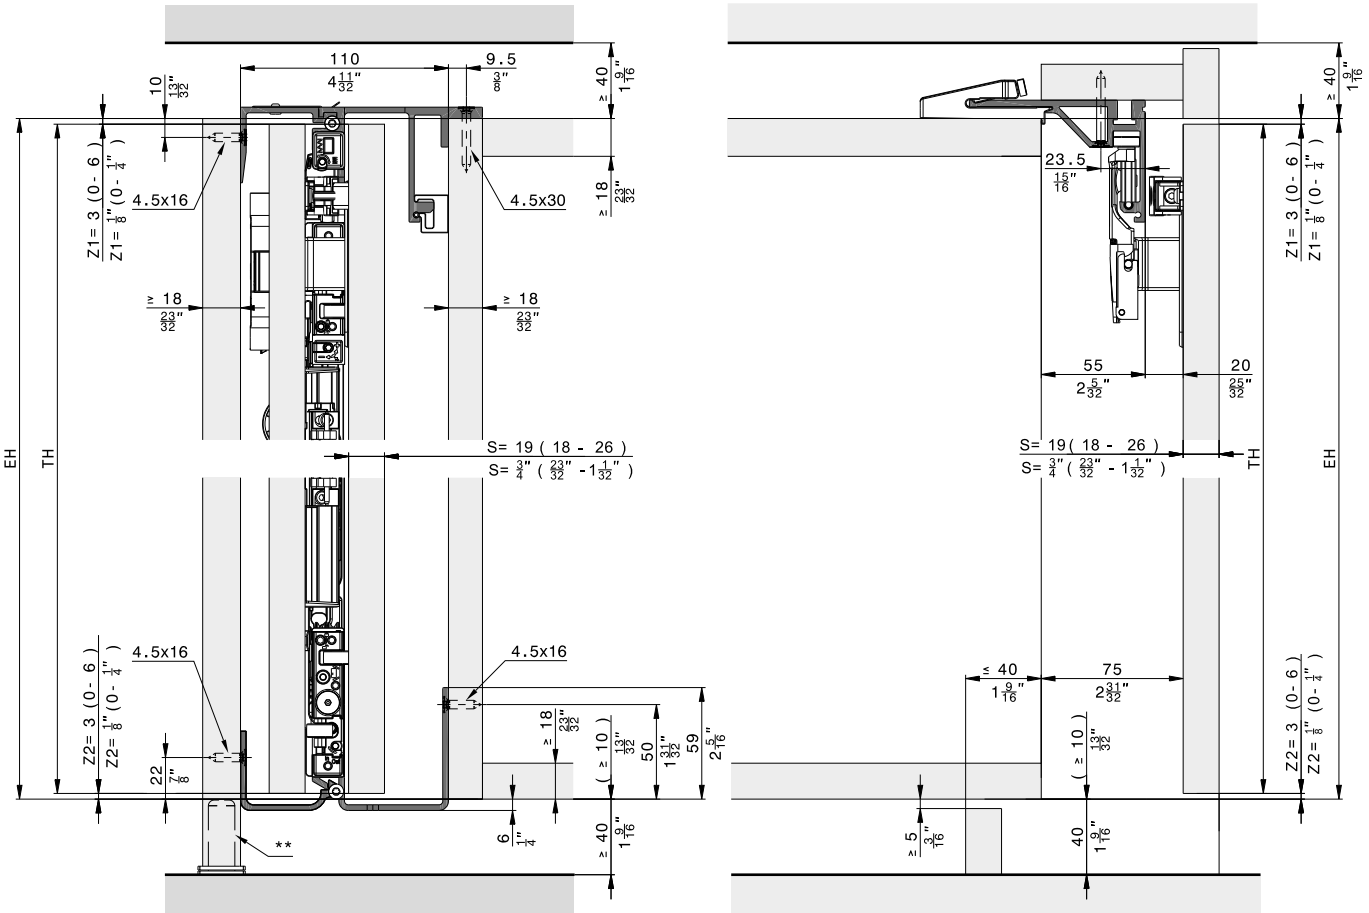
6–20 kg (13 to 44 lbs.)

1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')


18–26 mm (23/32'' to 1 1/32'')

Installation examples
Overlay door without base profile



** Recommendation: Use adjustable foot

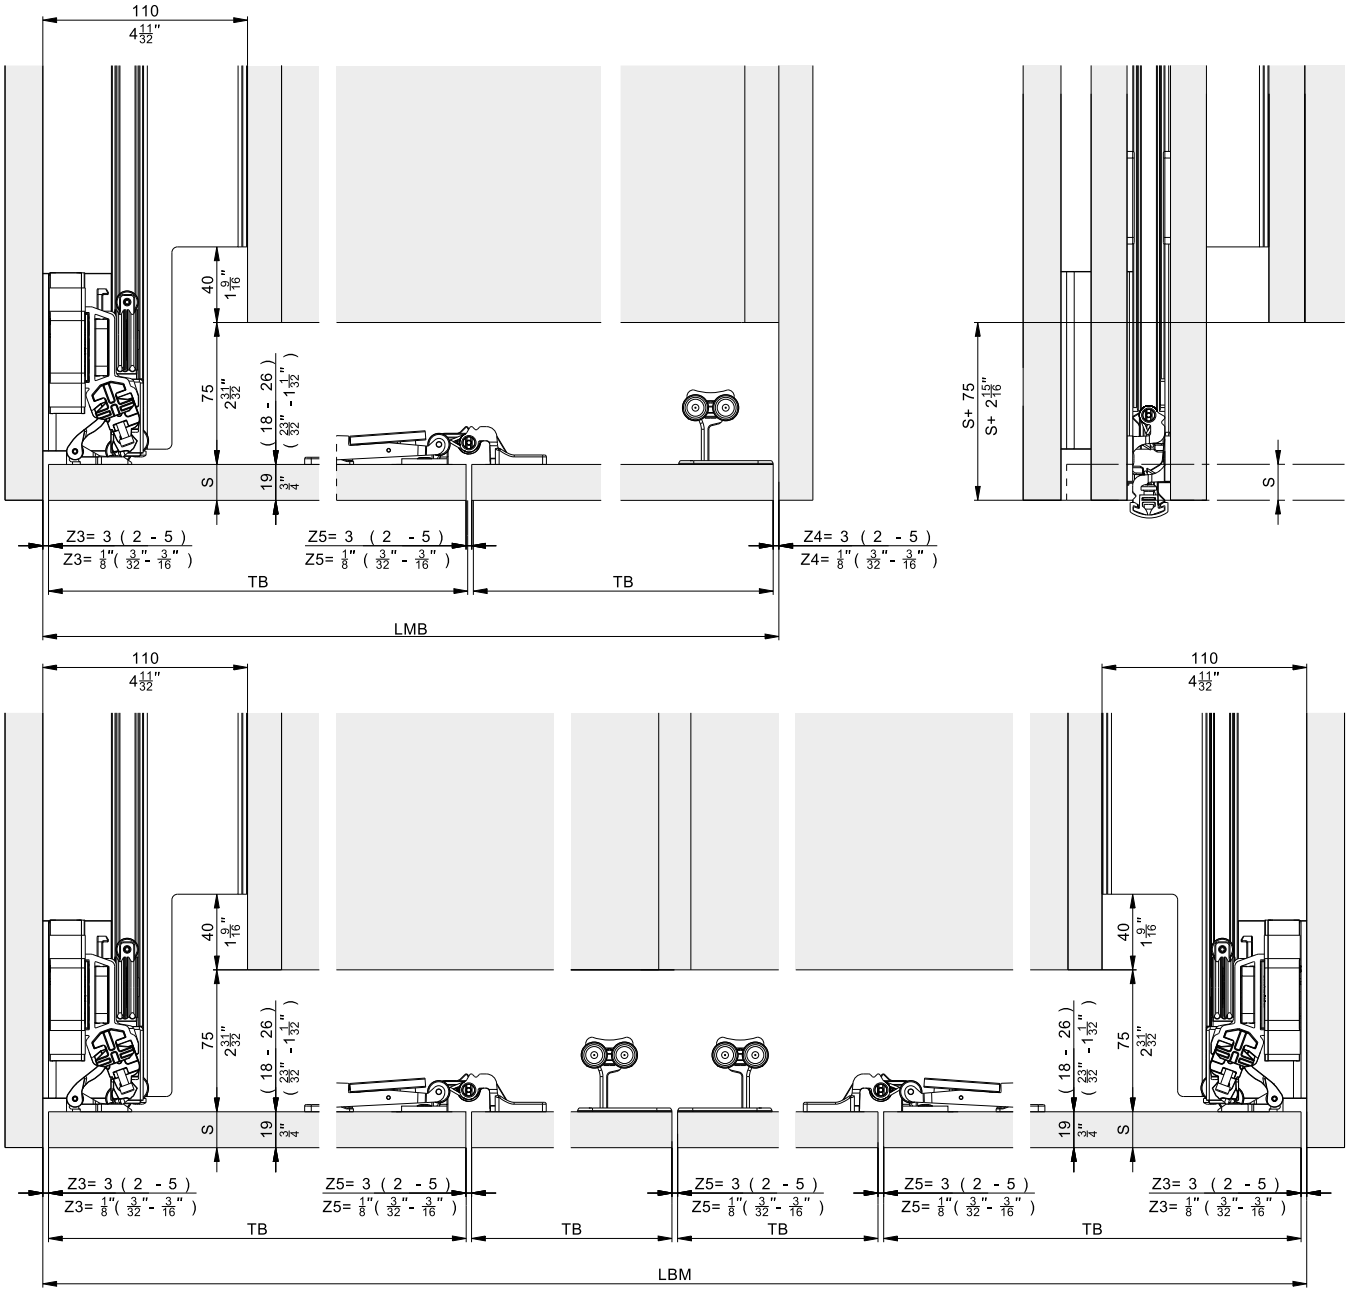
Overlay door without base profile, 2 and 4 doors



Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526



Hawa Folding Concepta III 20 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526

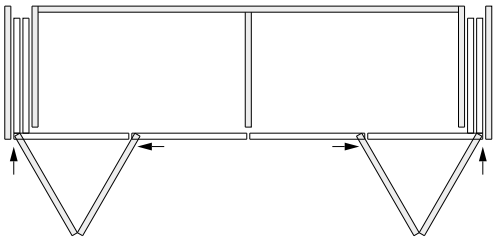for 4-door cabinets



Hawa Folding Concepta III 20 Push, left/right


Aluminum, anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	2	31519

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	2	31526

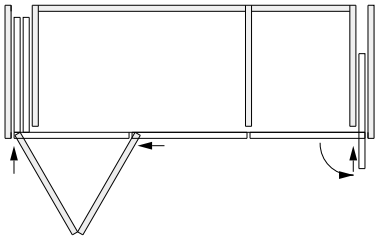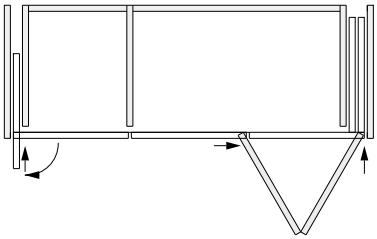for 3-door cabinets





Hawa Folding Concepta III 20 Push, left with Hawa Concepta III 25 Push, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Hawa Folding Concepta III 20 Push, right with Hawa Concepta III 25 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Hawa Configurator




www.hawa.com/configurator →

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

List of individual parts, which are included in the sets




Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31504

Set consisting of:		31504	No.
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	3	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	3	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530






Suitable slide-in set

	No.
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	31509

Set consisting of:		31508	31509	No.
	Slide-in unit Hawa Folding Concepta III 20 Push, left	1		31448
	End stop bracket for Push ejector, steel, zinc-plated	1	1	52560
	Push ejector, plastic, black	1	1	52454
	Slide-in securing mechanism, plastic, black	1	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	1	52118
	Slide-in unit Hawa Folding Concepta III 20 Push, right		1	31450






Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519








Set consisting of:		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Suitable 3-door track sets, aluminum, anodized



	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

		31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6’ 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340







Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized		1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right L= 788 mm (2’ 7 1/32")		1	31371






Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:		31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized






	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526

Set consisting of:		31526	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Subject to technical modifications. Metric specifications are exact. Inches are approximate.





Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:		31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column


Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340
	Running track curve, right, aluminum, black anodized		1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	31371


Reinforcement profiles

		No.
	Reinforcement profile for running track front, 2765 mm (9' 27/32''), 4 doors, aluminum, anodized	52109
	Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

		No.
	Routing jig for folding hinge	52121
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting
→ Details under accessories frome page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073

Aluminum, anodized


		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized

		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076


Automatic shut-off device
In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

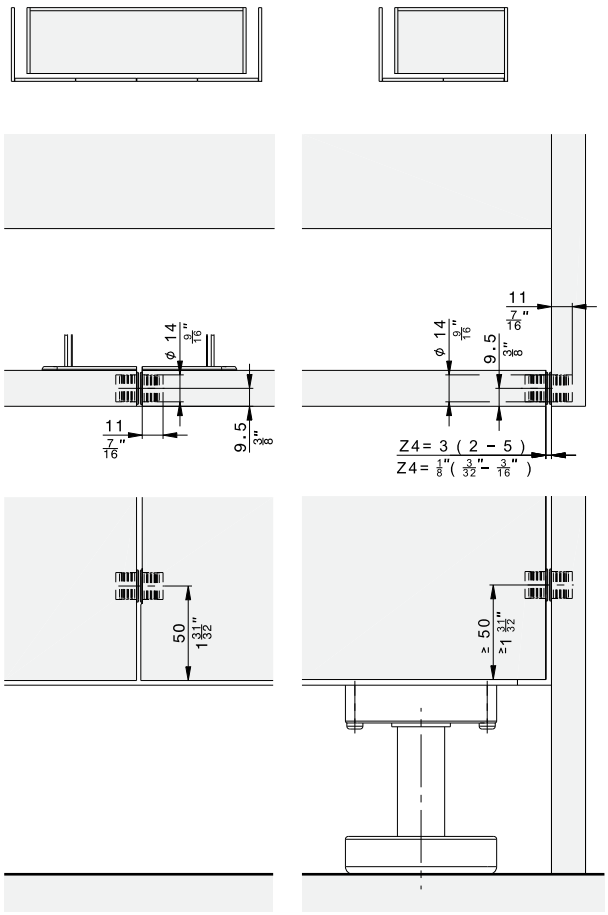Centering parts




Subject to technical modifications. Metric specifications are exact. Inches are approximate.

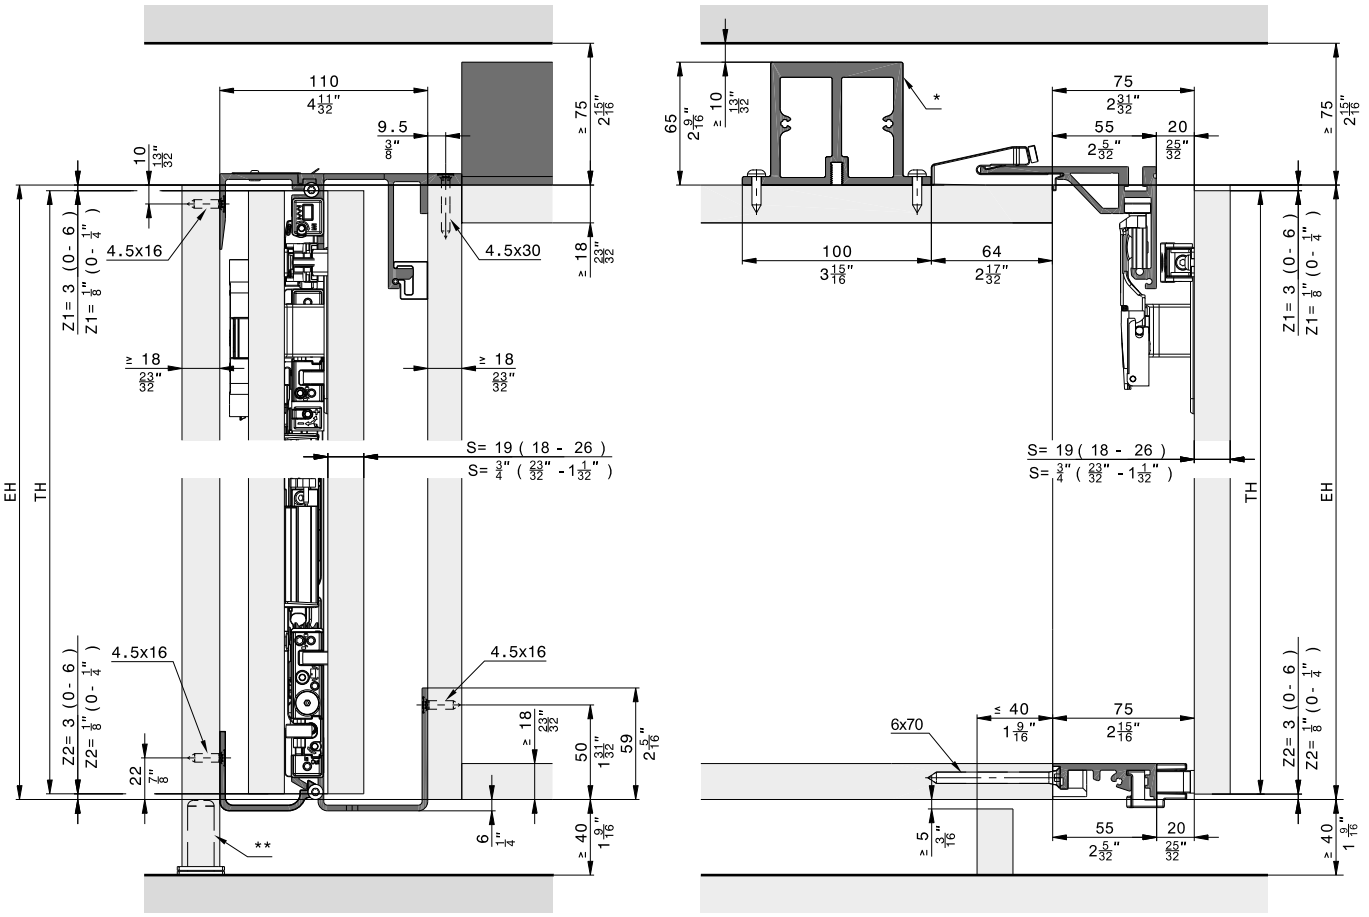Further installation examples
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

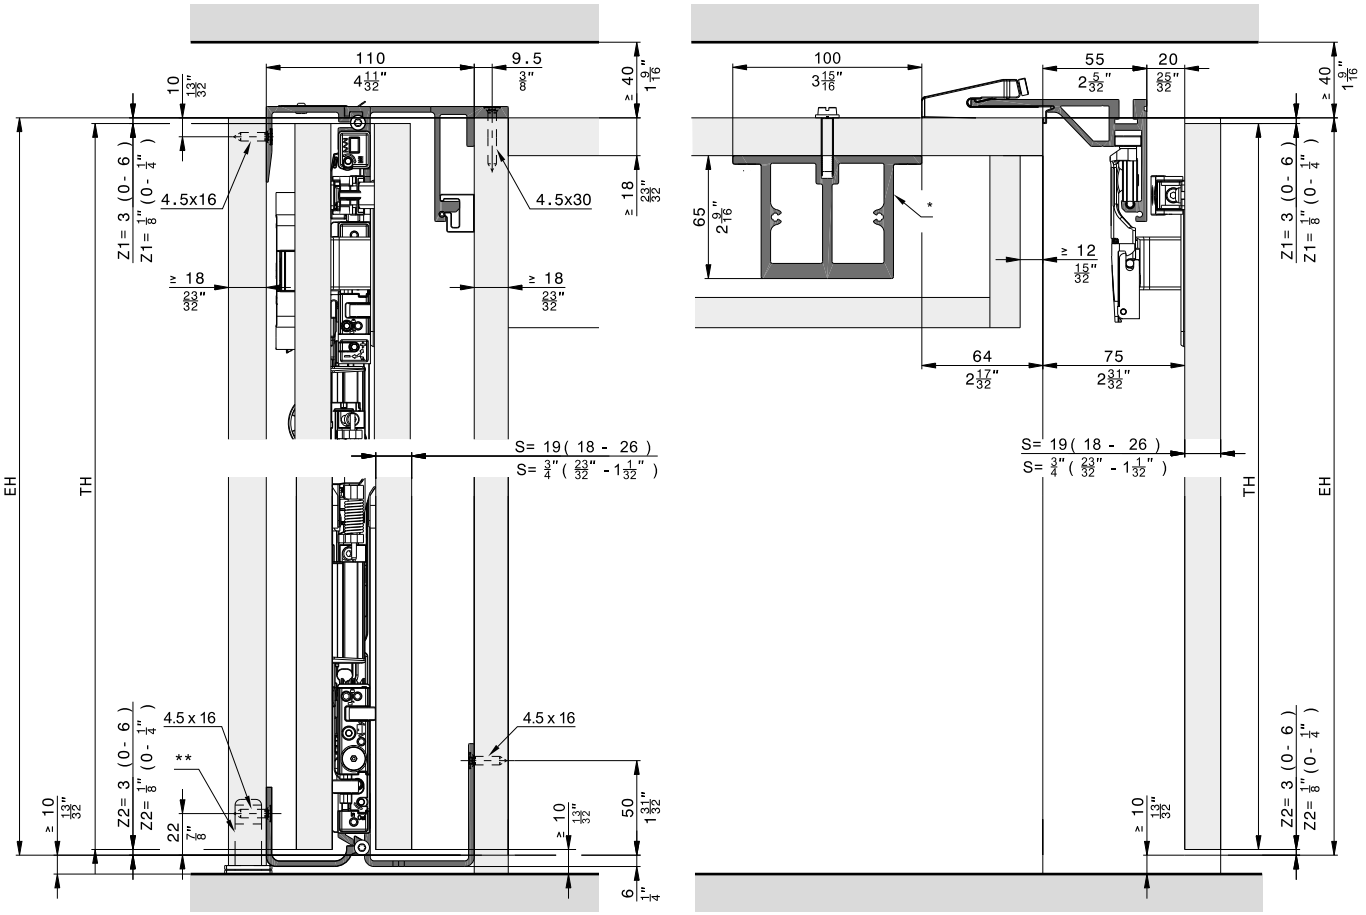
Floor-to-ceiling doors without base panels, 2 doors and 4 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

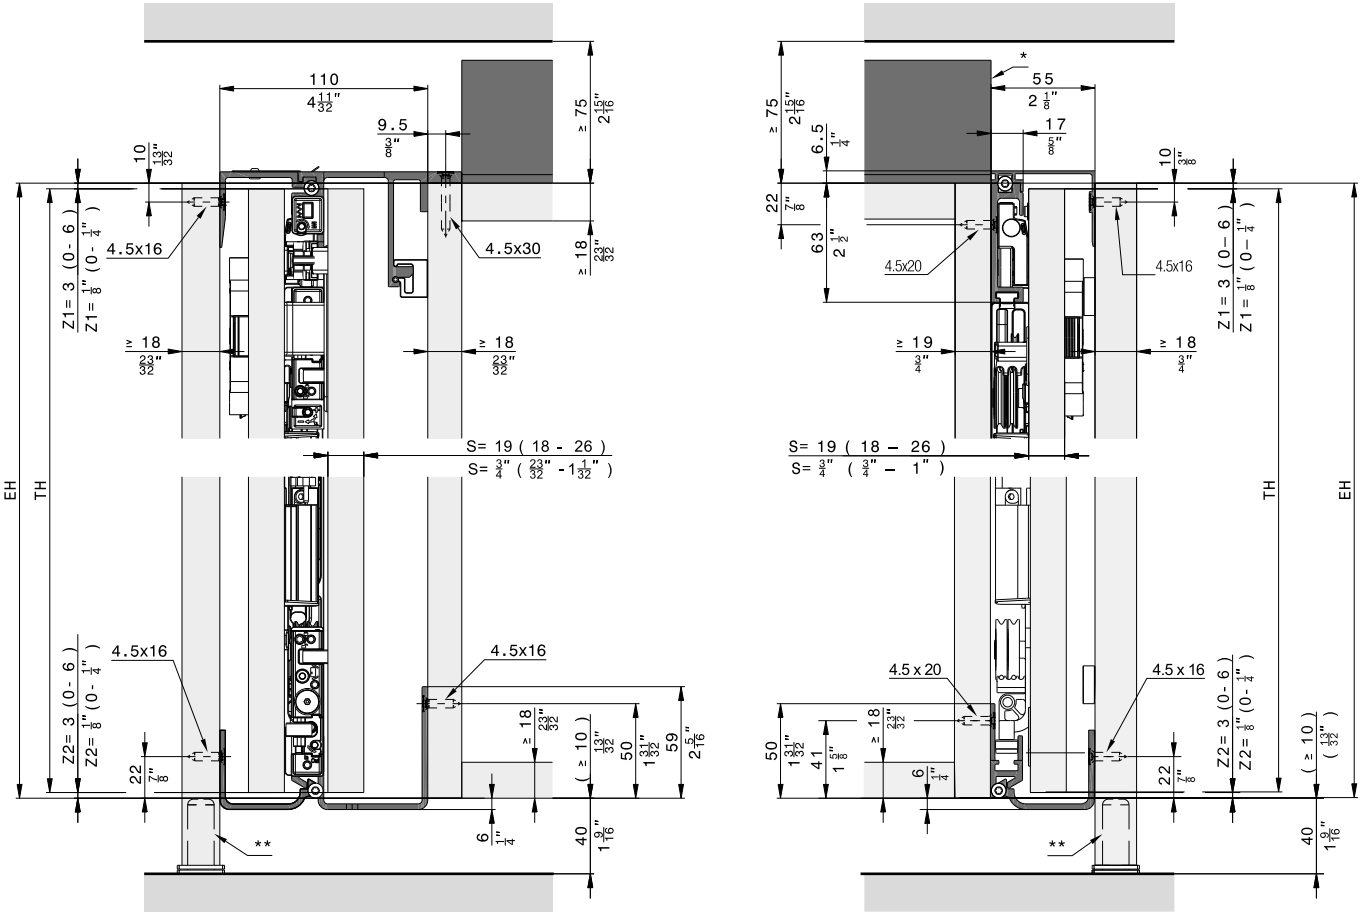
Overlay door without base profile, 3 doors




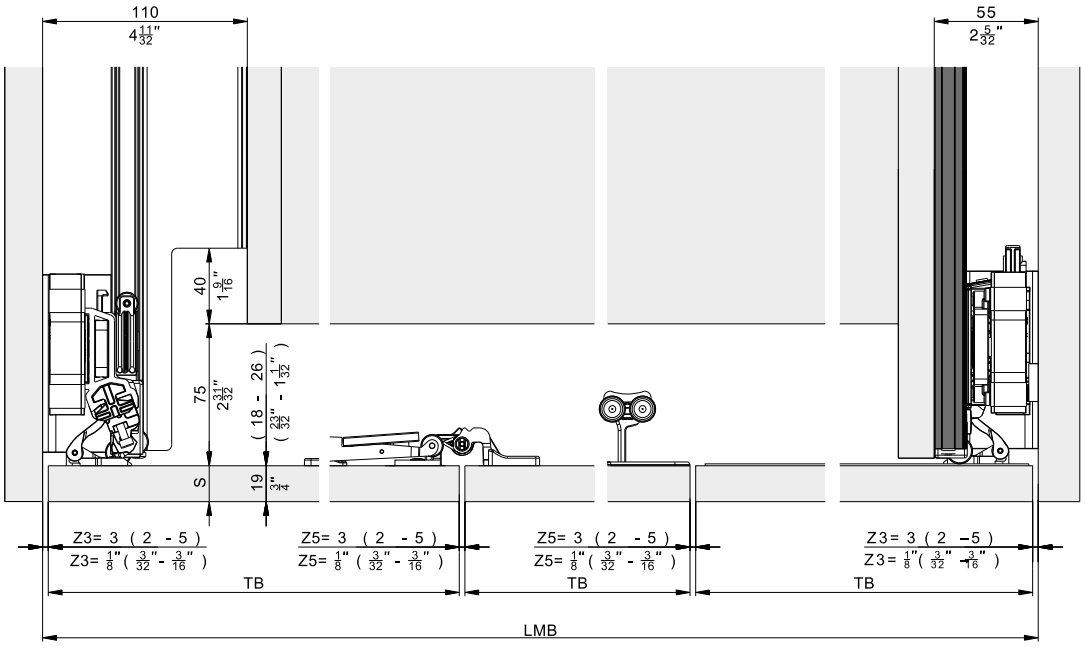
* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot



Composed cabinet

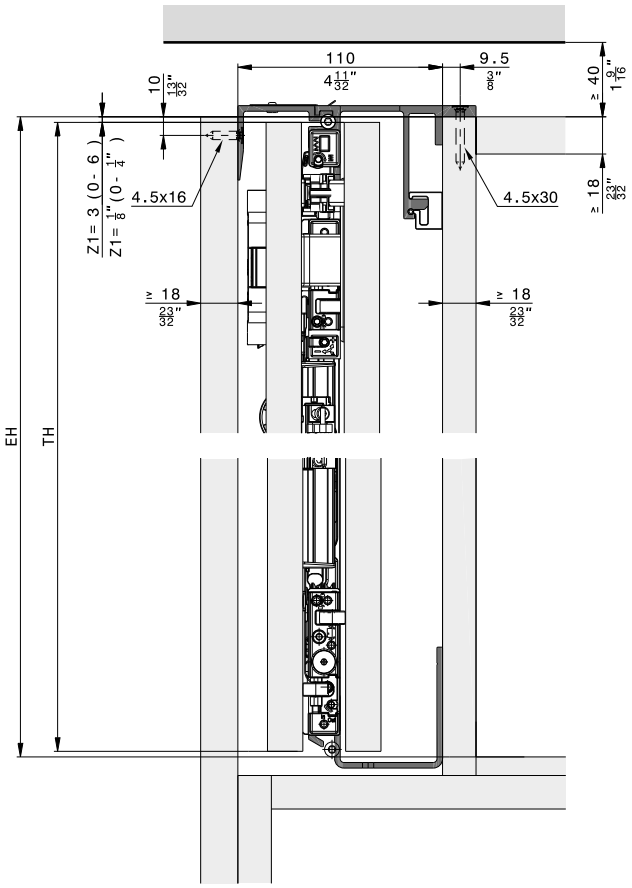

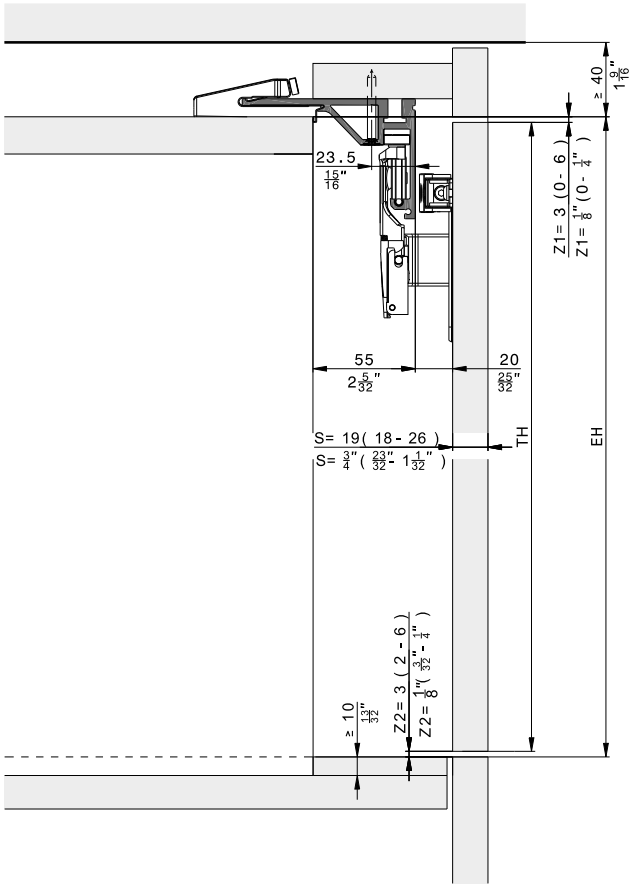


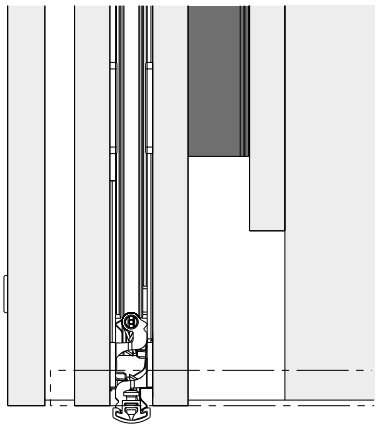


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Hardware depth calculation

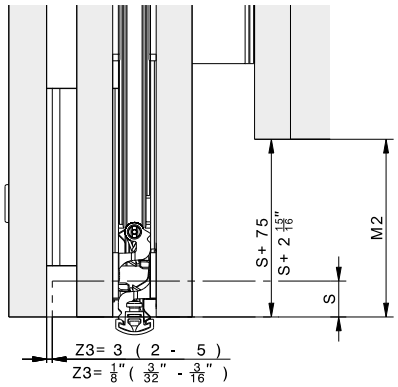
Flush door




Protruding door

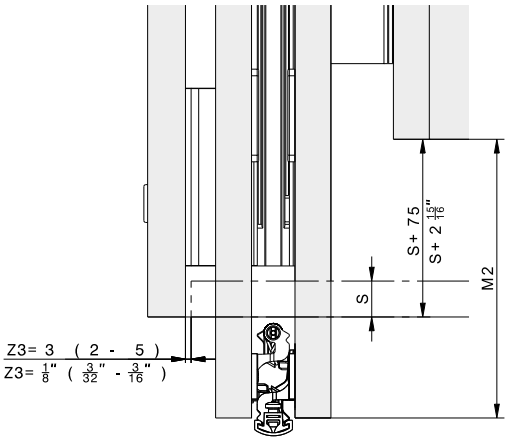

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

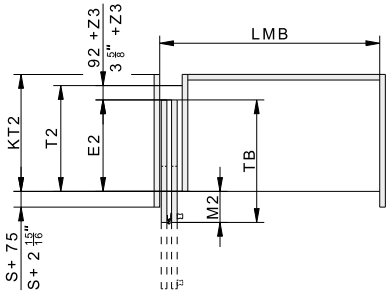

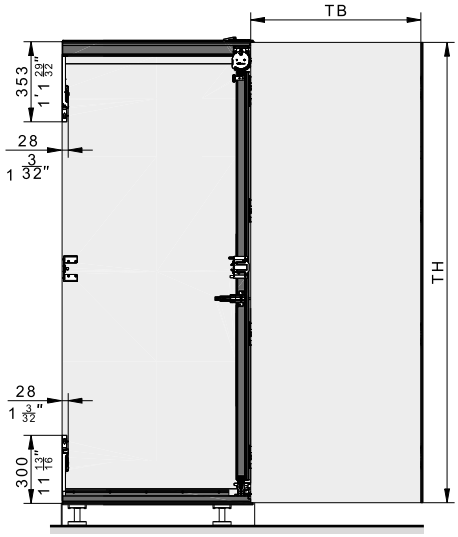

S = Door thickness
Z = Gap size
E2 = Slide-in depth
T2 = Hardware depth
TB = Door width
TH = Door height
KT2 = Cabinet depth
LMB = Inside clearance
M2 = Door projection over cabinet

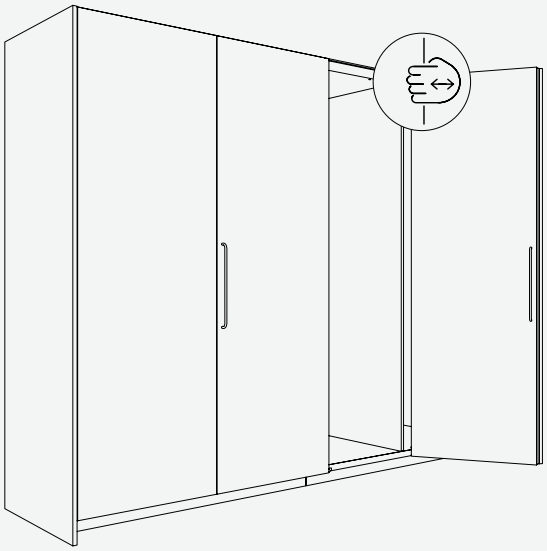
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

Flexibility Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of pre-assembly and intuitive adjustment

Comfort Opening and closing with very little effort – one hand is enough



Technical specifications

6–20 kg (13 to 44 lbs.)

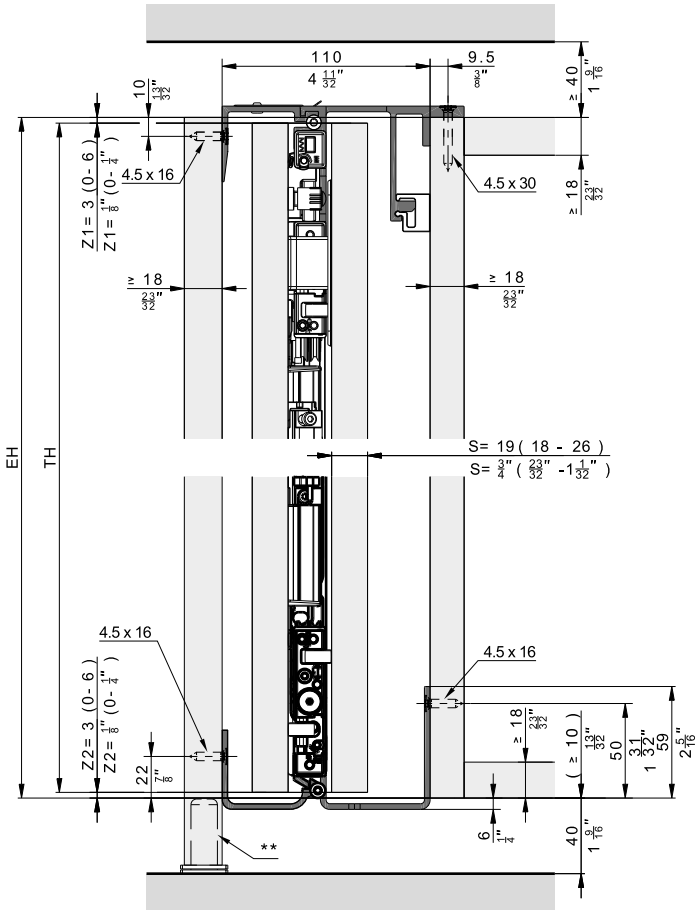
1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')

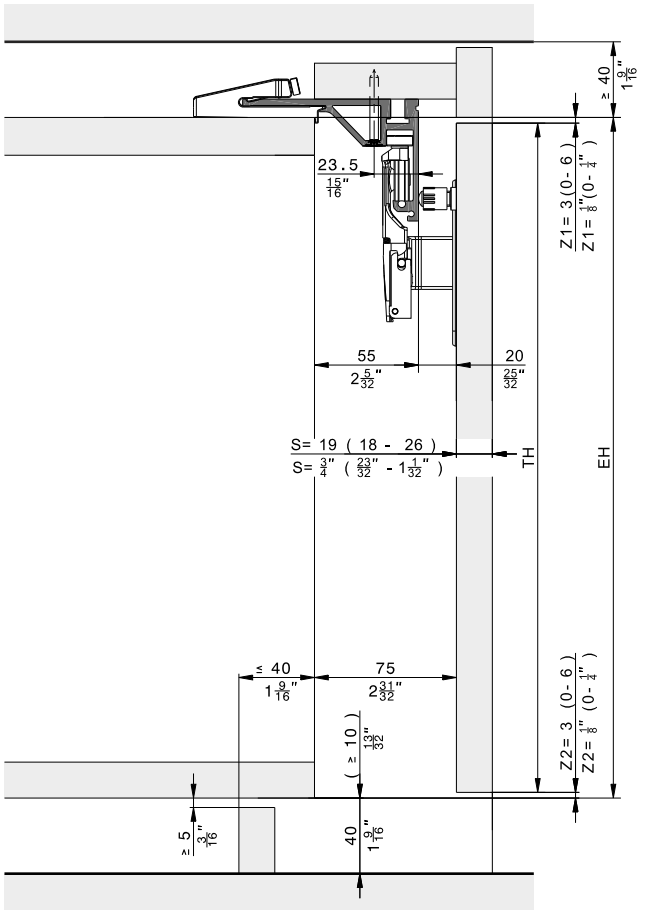
440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

18–26 mm (23/32'' to 1 1/32'')

Installation examples

Overlay door without base profile






** Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

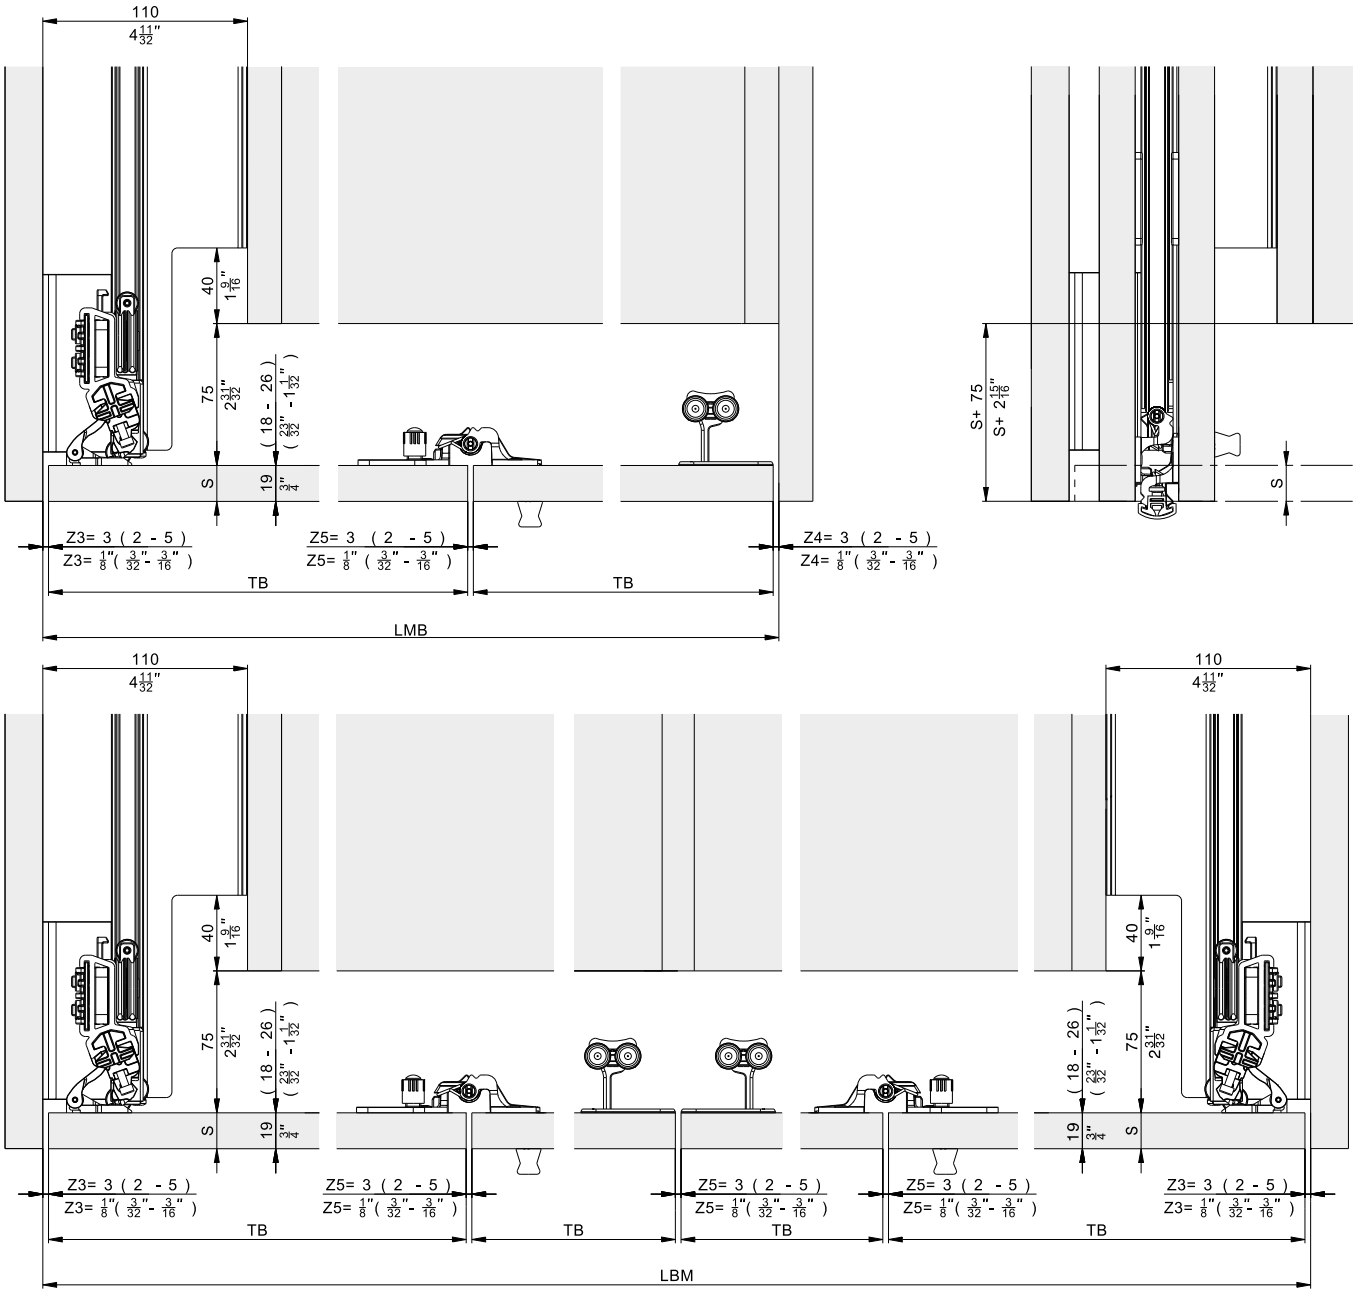Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526



Hawa Folding Concepta III 20 Pull, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526

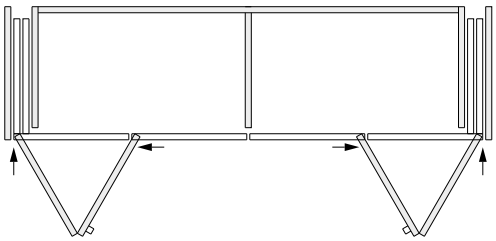for 4-door cabinets



Hawa Folding Concepta III 20 Pull, left/right

Aluminum, anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	2	31519

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	2	31526

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

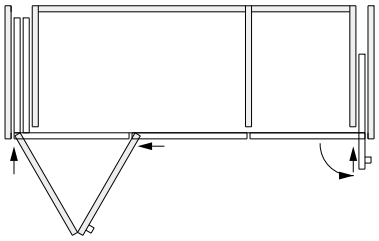for 3-door cabinets




Hawa Folding Concepta III 20 Pull, left with Hawa Concepta III 25 Pull, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

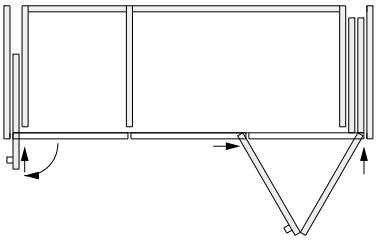

Hawa Folding Concepta III 20 Pull, right with Hawa Concepta III 25 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Hawa Configurator


www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')	31506




Set consisting of:

		31506	No.
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	3	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set

	No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513







Set consisting of:

		31512	31513	No.
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1		31004
	Pull end stop bracket, steel, zinc-plated	1	1	31541
	Slide-in securing mechanism, plastic, black	1	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right		1	31046

Subject to technical modifications. Metric specifications are exact. Inches are approximate.






Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343







Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized	31519

Set consisting of:		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502



Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:		31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6’ 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340

Continued table on next column






Table continued from previous column

	Running track curve, right, aluminum, anodized		1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right L= 788 mm (2’ 7 1/32")		1	31371

Subject to technical modifications. Metric specifications are exact. Inches are approximate.






Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:		31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344






Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526

Set consisting of:		31526	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502





Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524


Set consisting of:		31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6’ 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column


Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340
	Running track curve, right, aluminum, black anodized		1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right, L= 788 mm (2’ 7 1/32")		1	31371


Reinforcement profiles

		No.
	Reinforcement profile for running track front, 2765 mm (9' 27/32''), 4 doors, aluminum, anodized	52109
	Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

		No.
	Routing jig for folding hinge	52121
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Straightening fitting
→ Details under accessories frome page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073

Aluminum, anodized


		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076

Automatic shut-off device
In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

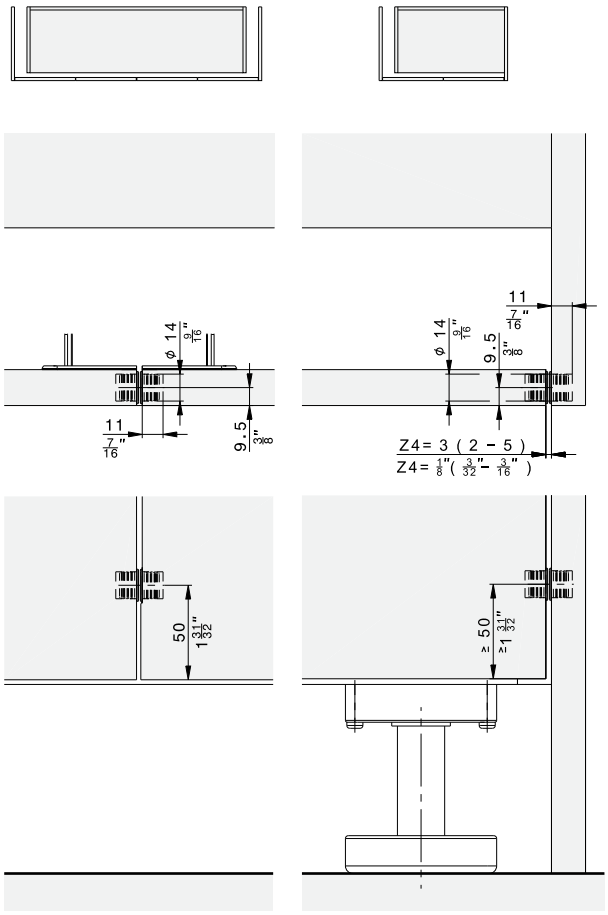Centering parts



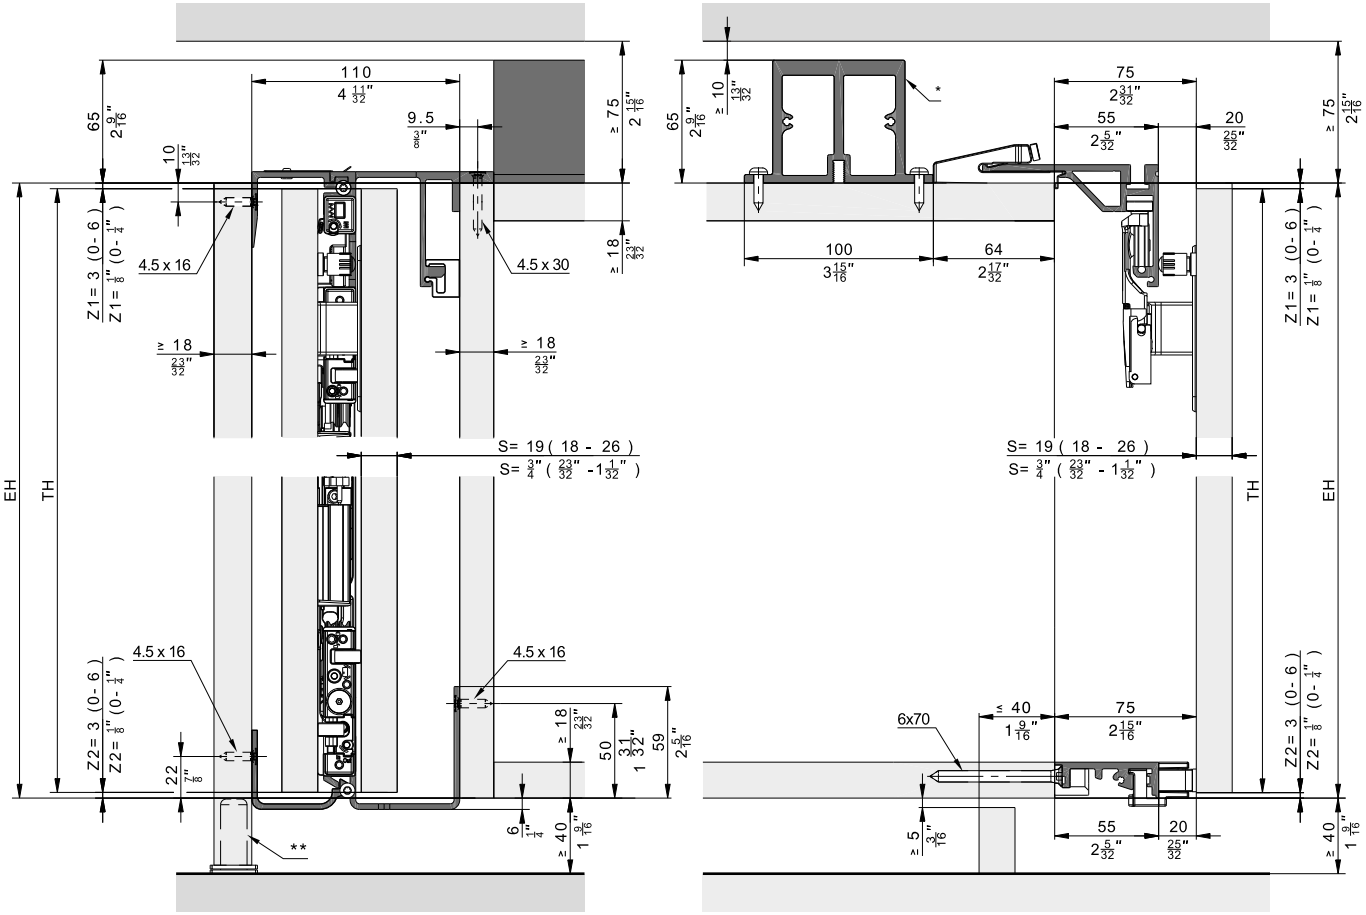
Further installation examples
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

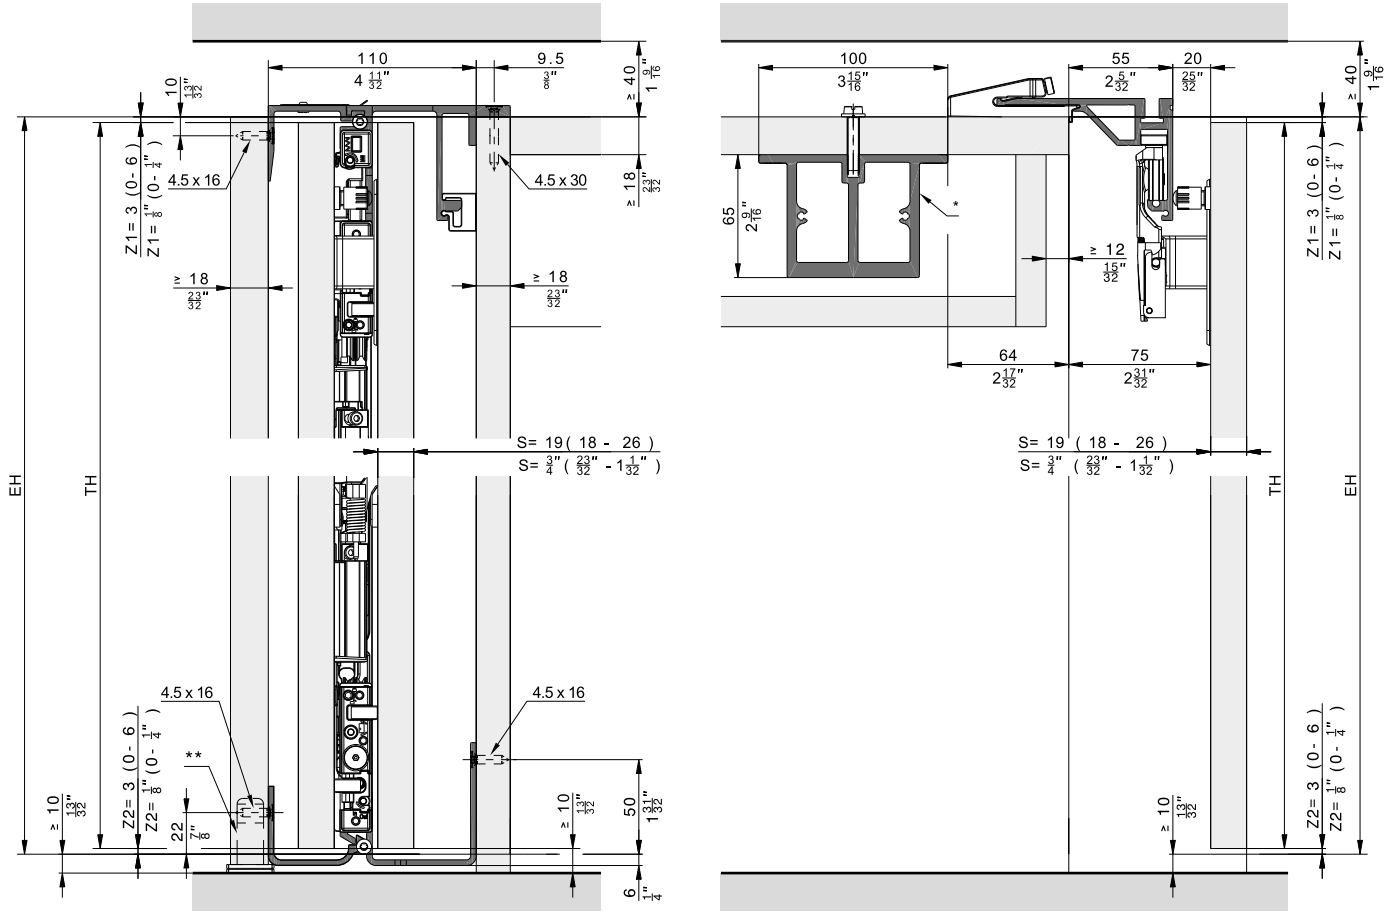Floor-to-ceiling doors without base panels, 2 doors and 4 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

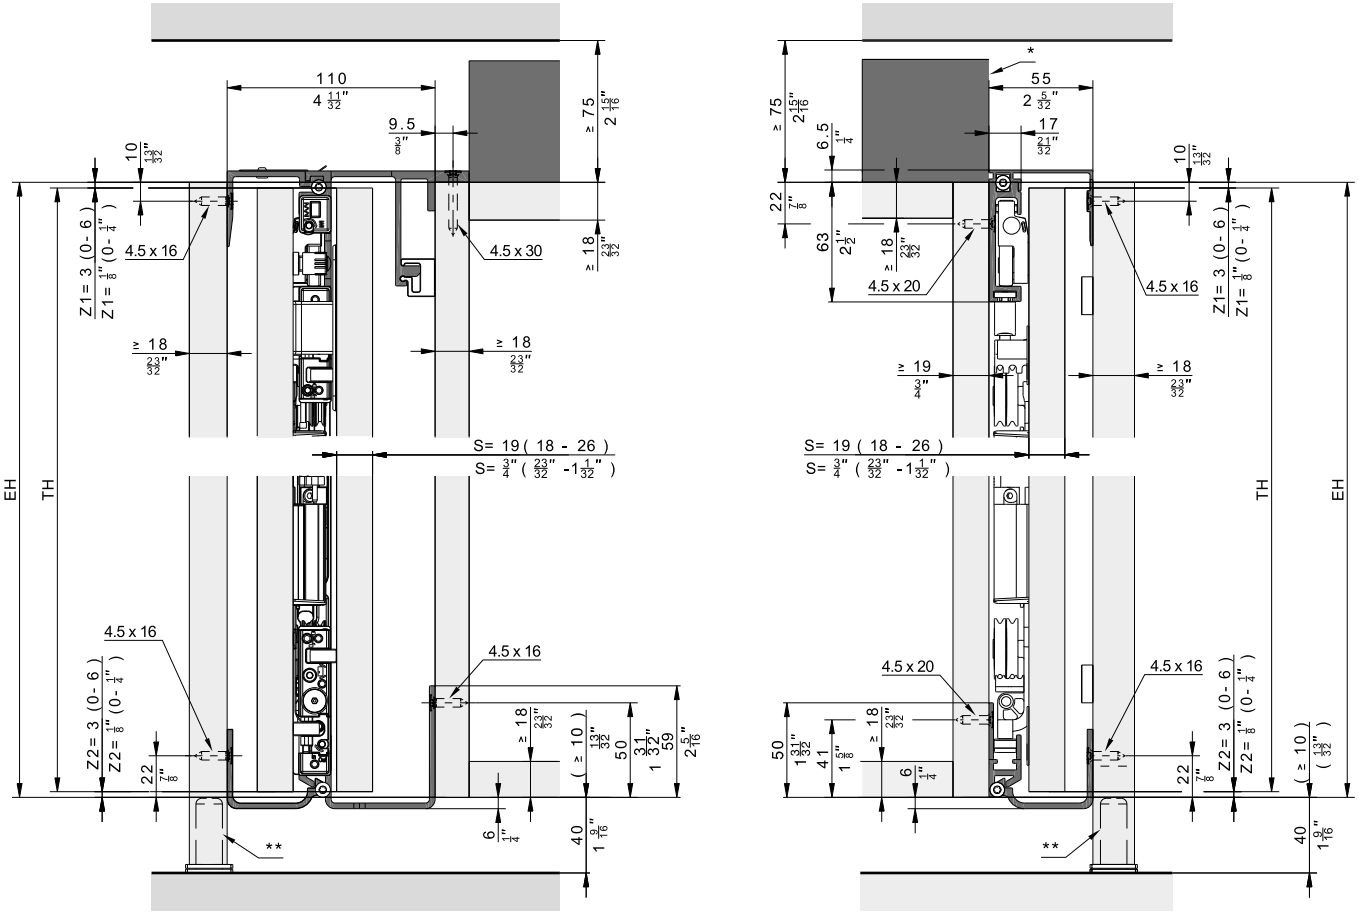Overlay door without base profile, 3 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

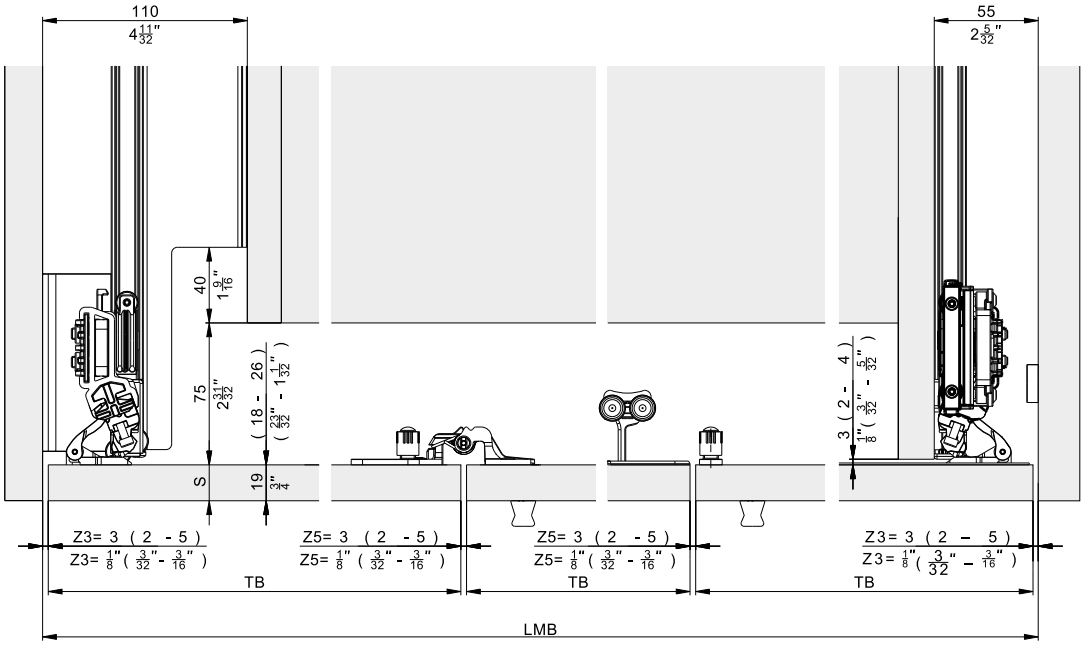
** Recommendation: Use adjustable foot




Subject to technical modifications. Metric specifications are exact. Inches are approximate.

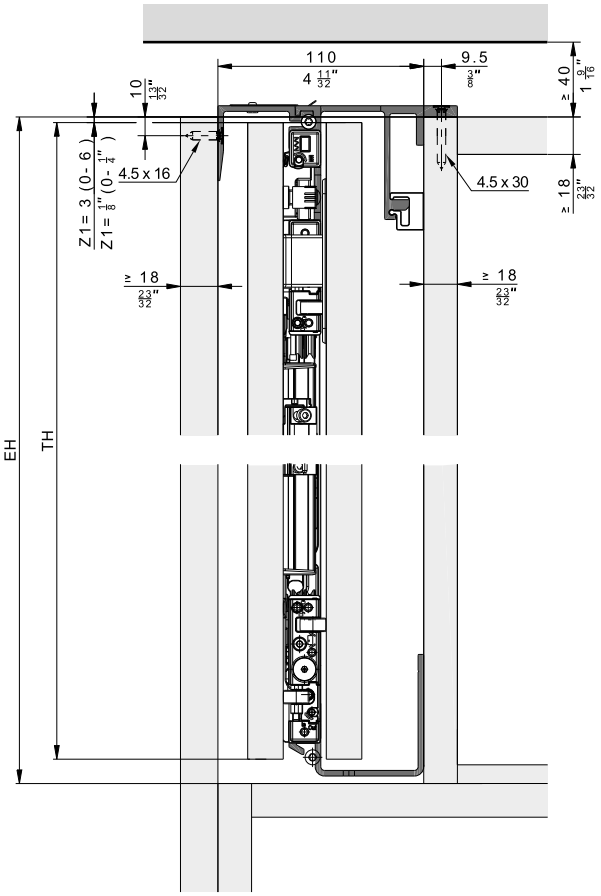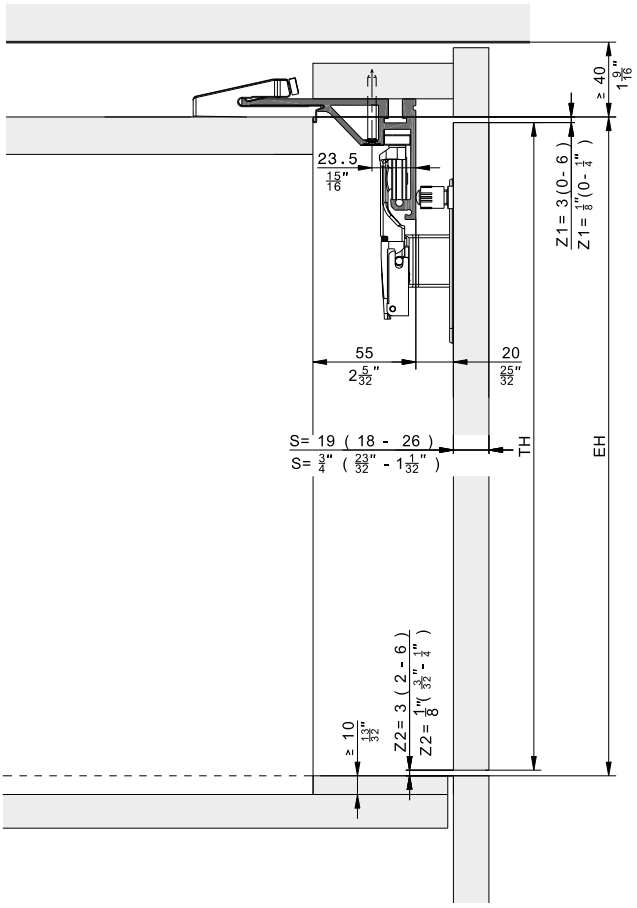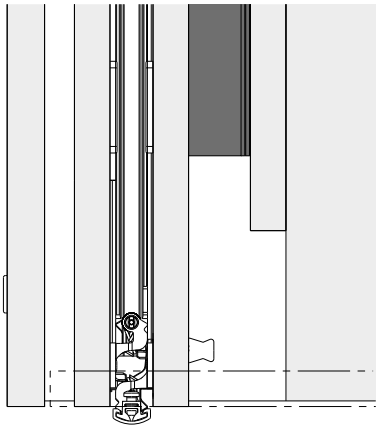
Composed cabinet









Composed cabinet

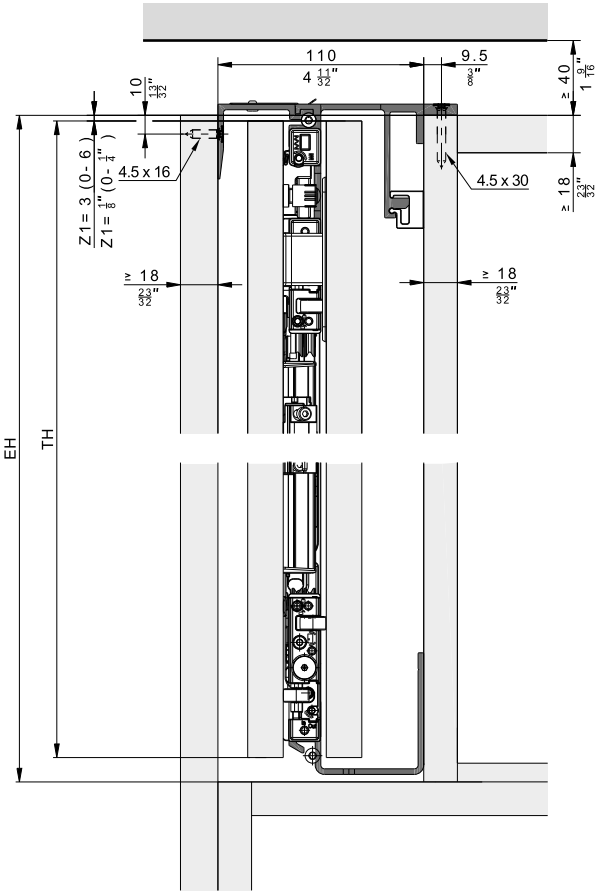

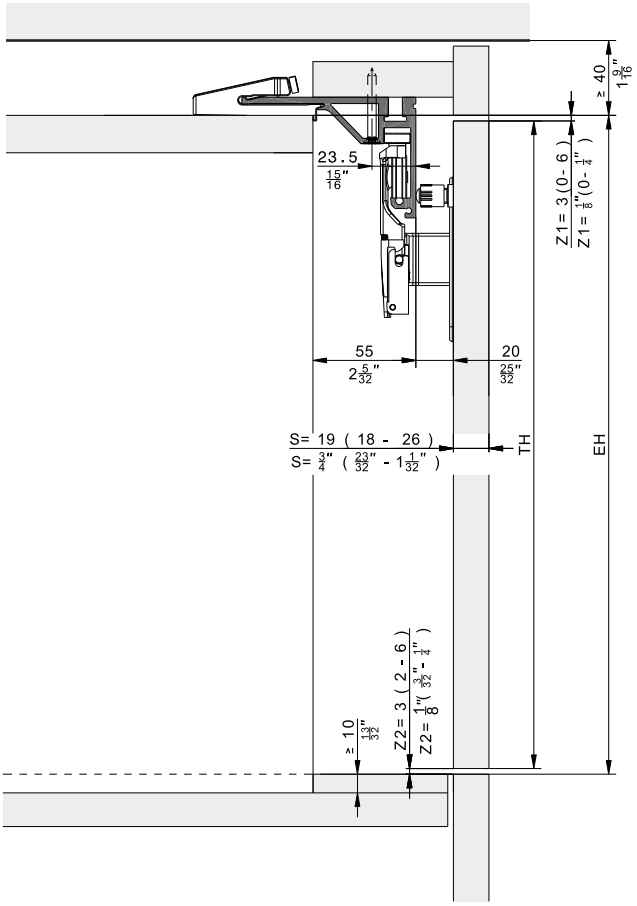

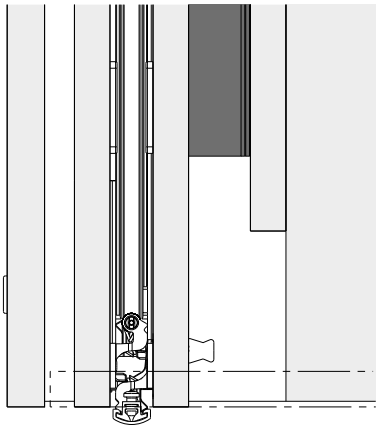

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

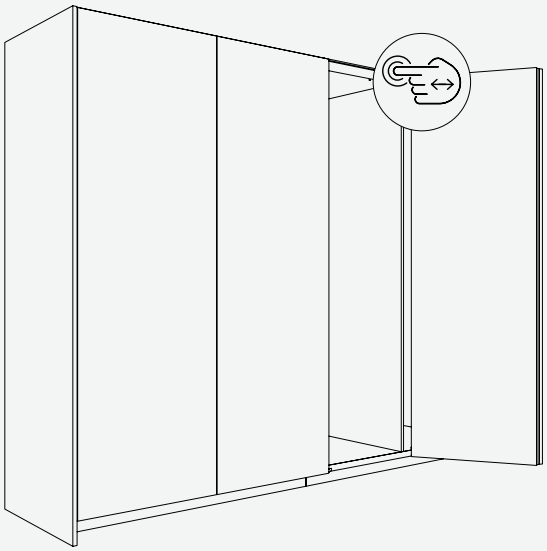
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Flexibility Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of pre-assembly and intuitive adjustment

Aesthetics Cabinet designs without handle – the technology remains invisible



Technical specifications

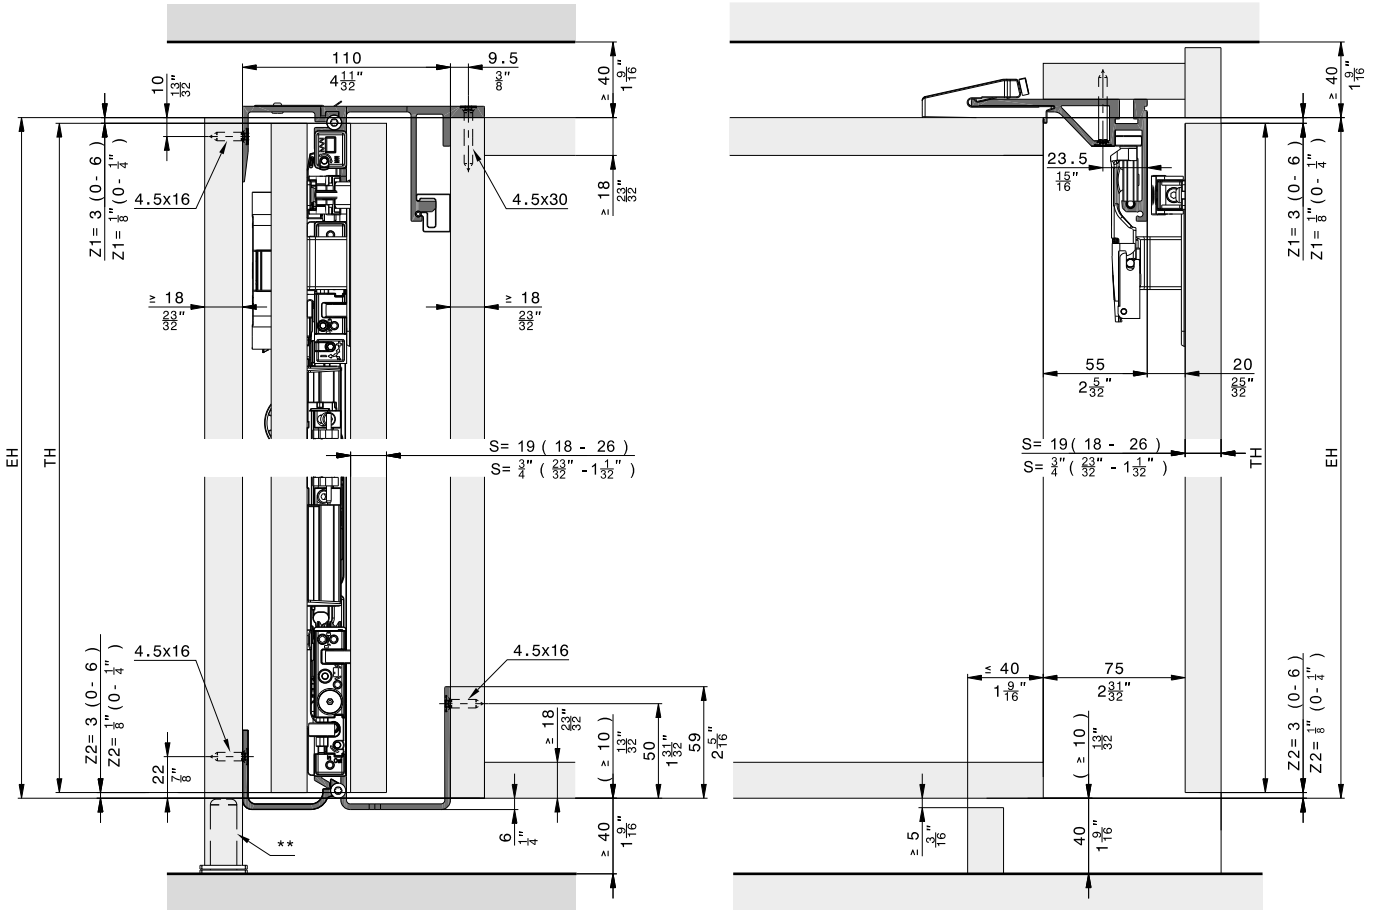
10–25 kg (22 to 55 lbs.)

1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')


18–26 mm (23/32'' to 1 1/32'')

Installation examples
Overlay door without base profile



** Recommendation: Use adjustable foot

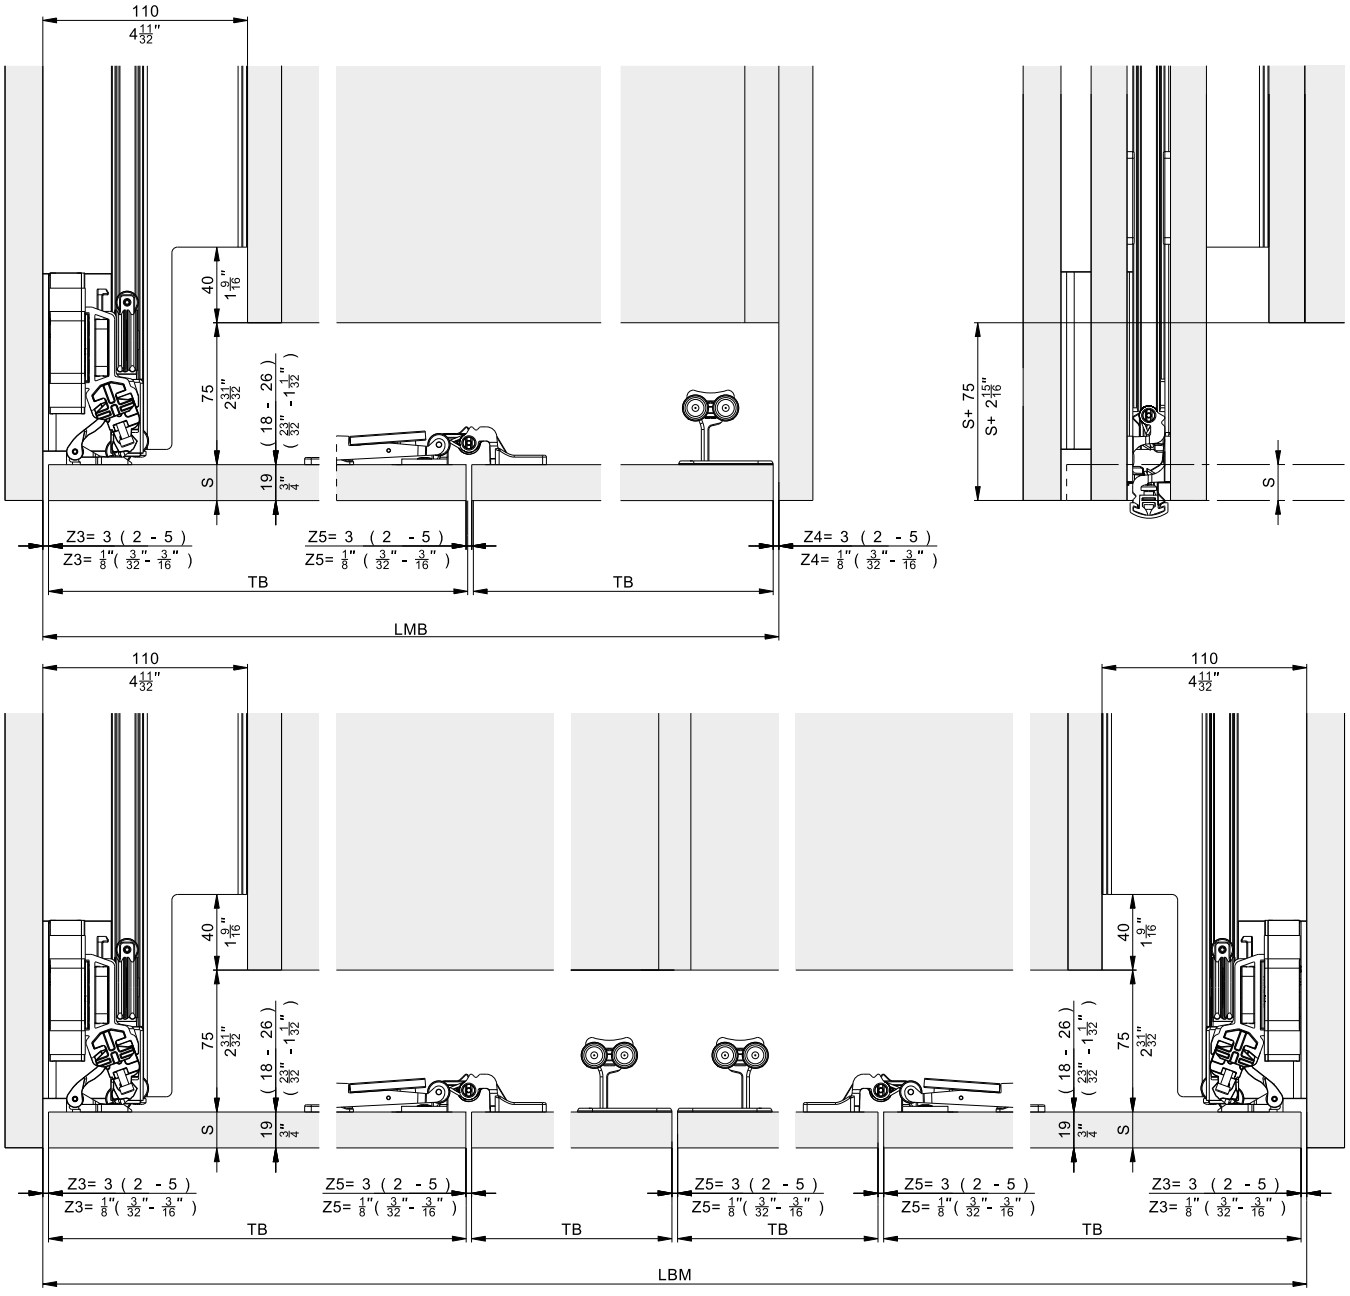
Overlay door without base profile, 2 and 4 doors



Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527



Hawa Folding Concepta III 25 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527

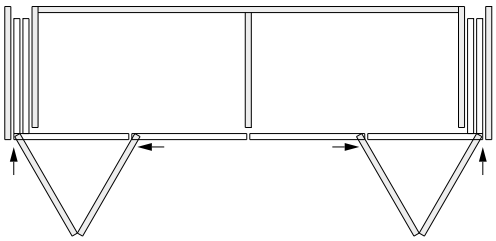for 4-door cabinets



Hawa Folding Concepta III 25 Push, left/right


Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	2	31520

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	2	31527

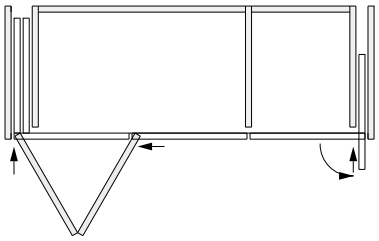for 3-door cabinets




Hawa Folding Concepta III 25 Push, left with Hawa Concepta III 35 Push, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

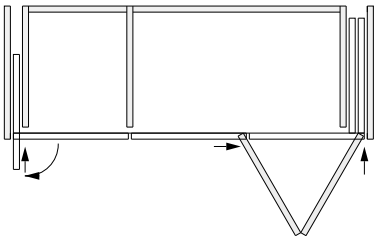

Hawa Folding Concepta III 25 Push, right with Hawa Concepta III 35 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Hawa Configurator




www.hawa.com/configurator →

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

List of individual parts, which are included in the sets




Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6'2 13/16'' to 8'10 5/16'')	31505

Set consisting of:		31505	No.
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	4	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	4	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530







Suitable slide-in set

	No.
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	31511

Set consisting of:		31510	31511	No.
	Slide-in unit Hawa Folding Concepta III 25 Push, left	1		31002
	End stop bracket for Push ejector, steel, zinc-plated	1	1	52560
	Push ejector, plastic, black	1	1	52454
	Slide-in securing mechanism, plastic, black	1	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	1	52118
	Slide-in unit Hawa Folding Concepta III 25 Push, right		1	31003






Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520








Set consisting of:		31520	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Suitable 3-door track sets, aluminum, anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

		31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6’ 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340







Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized		1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right L= 788 mm (2’ 7 1/32")		1	31371






Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:		31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized






	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527

Set consisting of:		31527	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Subject to technical modifications. Metric specifications are exact. Inches are approximate.





Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524


Set consisting of:		31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column


Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340
	Running track curve, right, aluminum, black anodized		1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	31371


Reinforcement profiles

		No.
	Reinforcement profile for running track front, 2765 mm (9' 27/32''), 4 doors, aluminum, anodized	52109
	Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

		No.
	Routing jig for folding hinge	52121
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting
→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082

Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081


Automatic shut-off device
In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

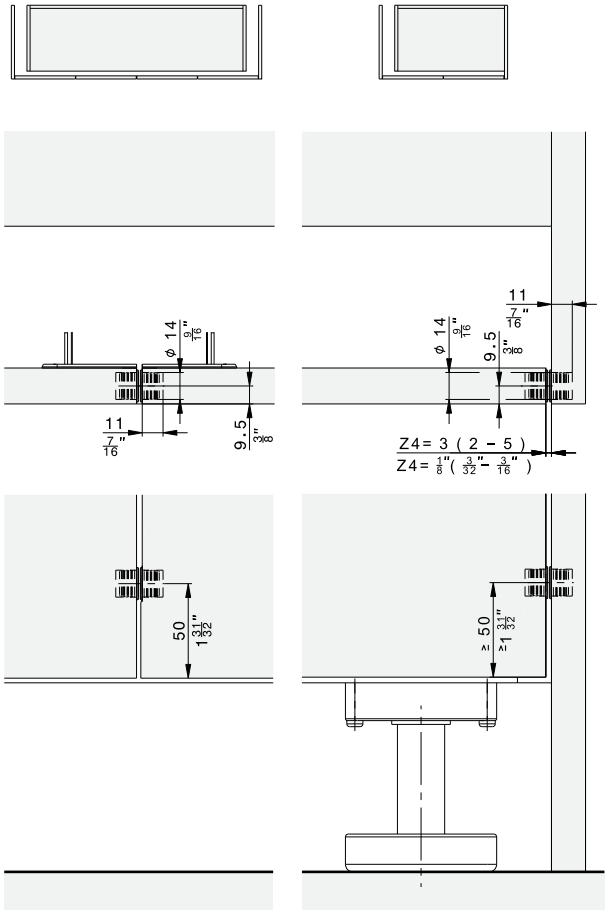Centering parts




Subject to technical modifications. Metric specifications are exact. Inches are approximate.

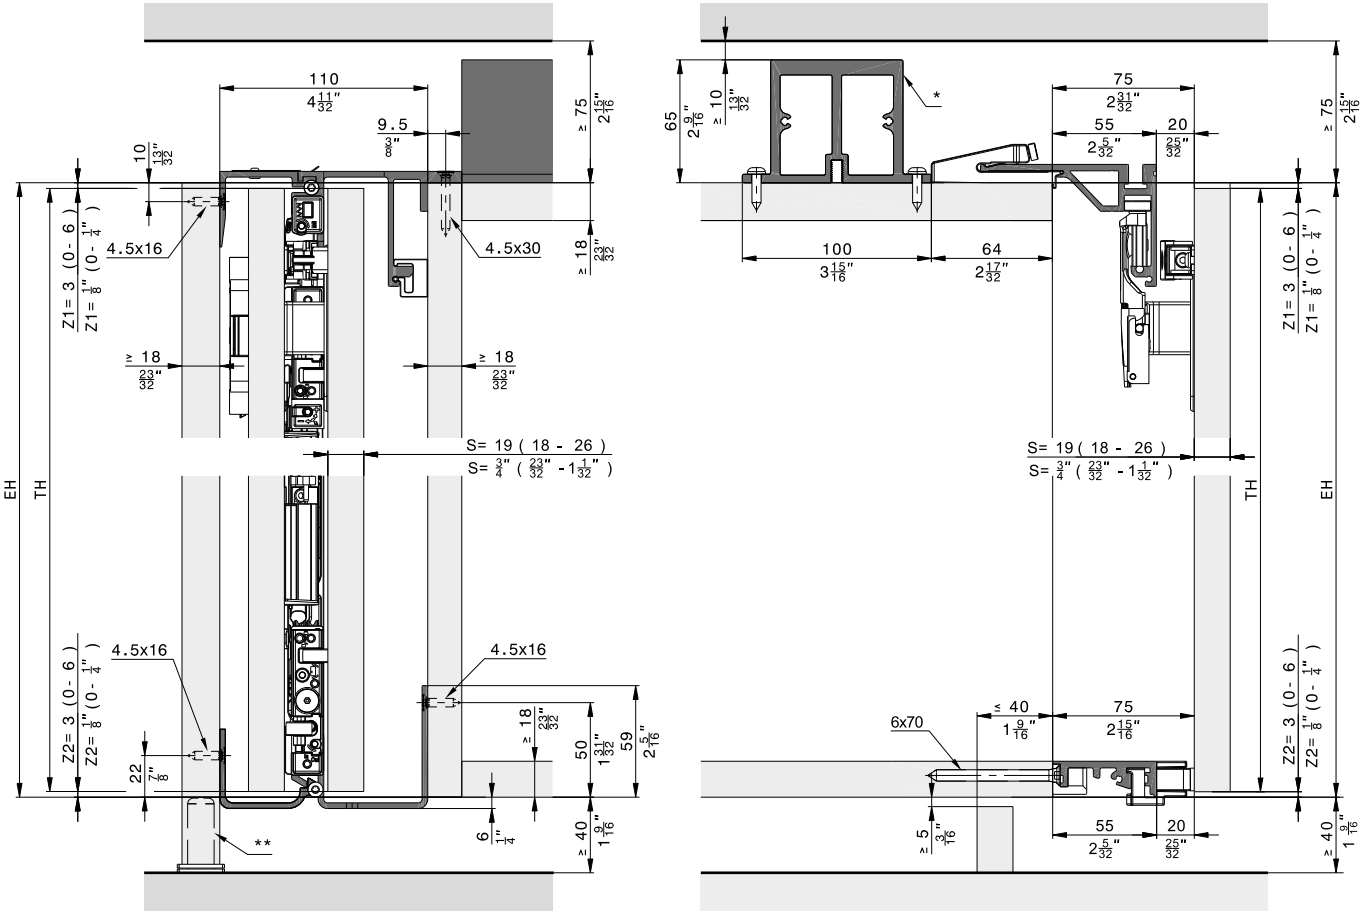Further installation examples
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

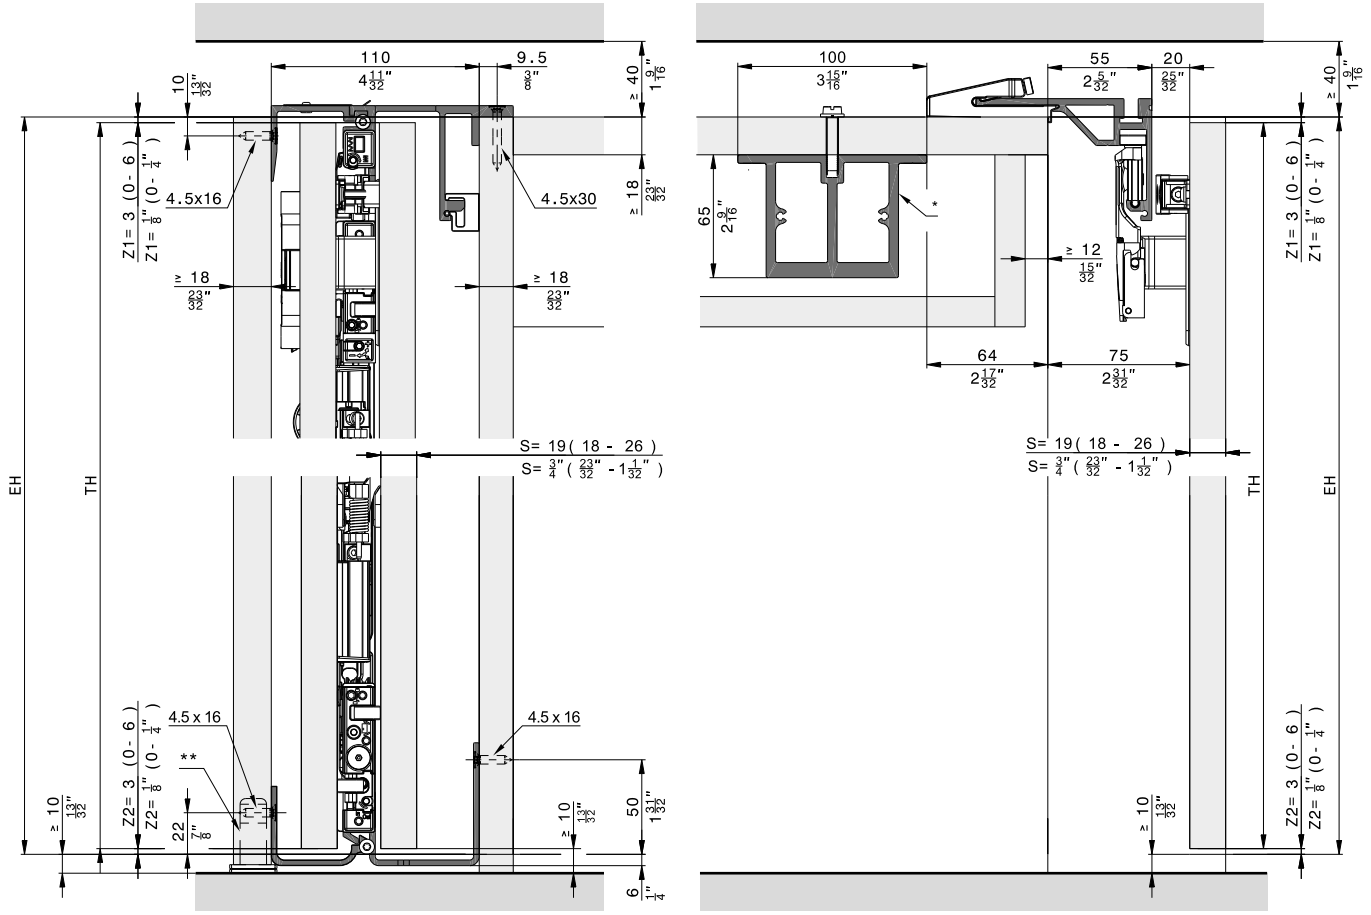
Floor-to-ceiling doors without base panels, 2 doors and 4 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

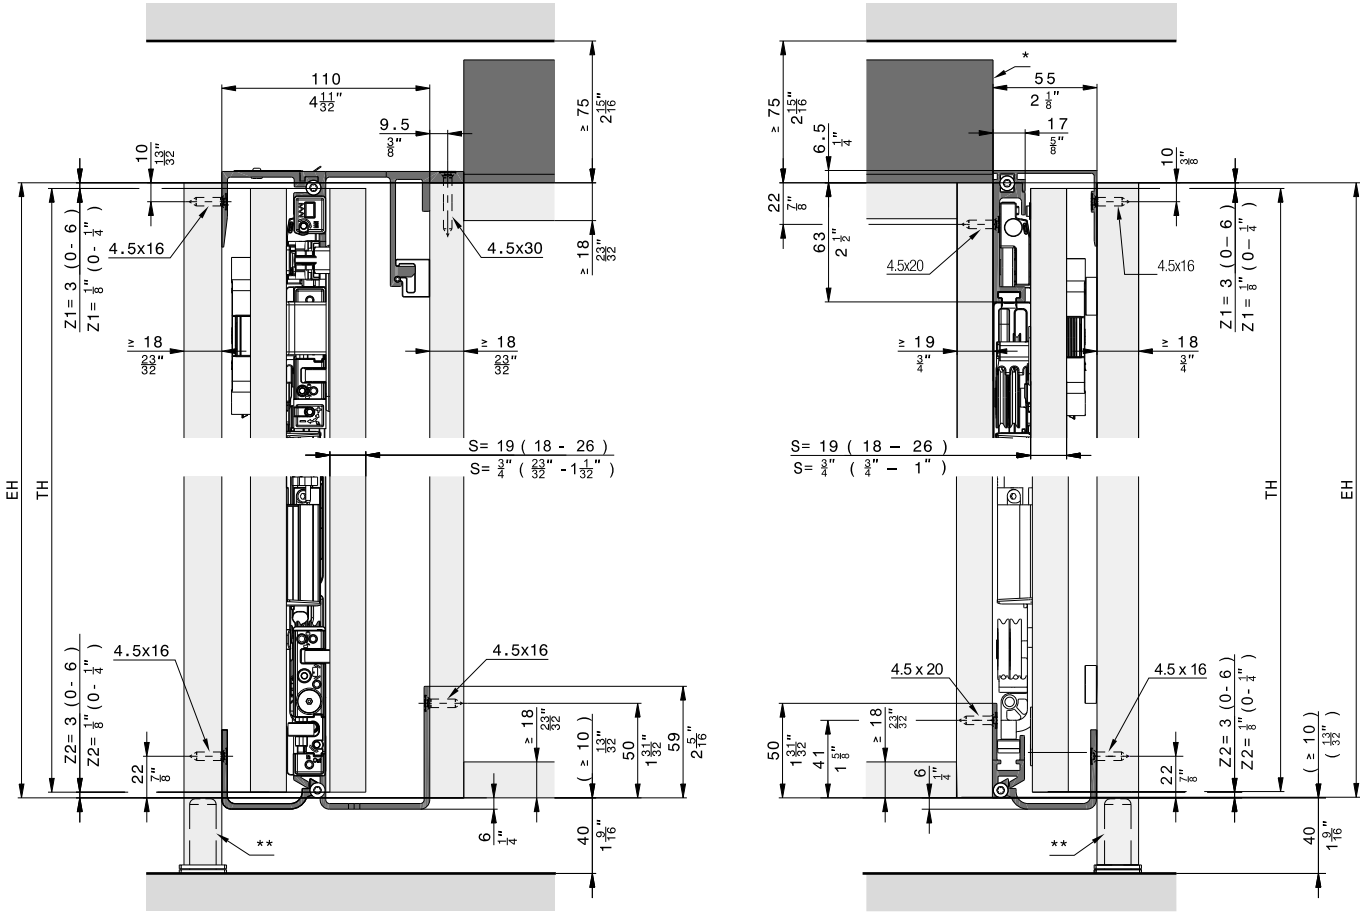
Overlay door without base profile, 3 doors




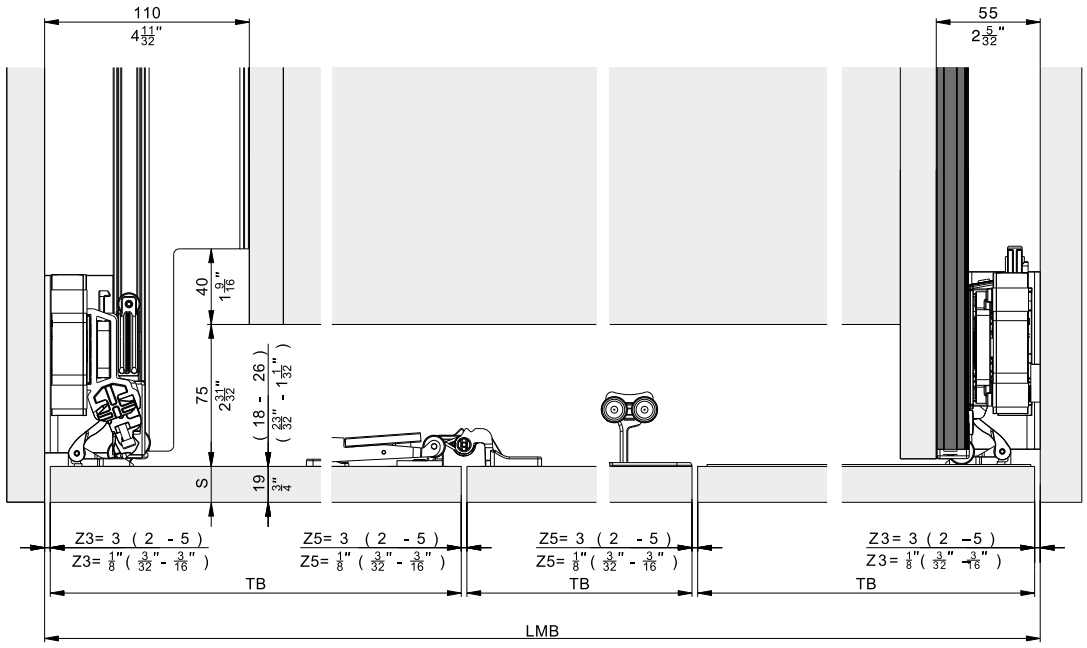
* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot



Composed cabinet

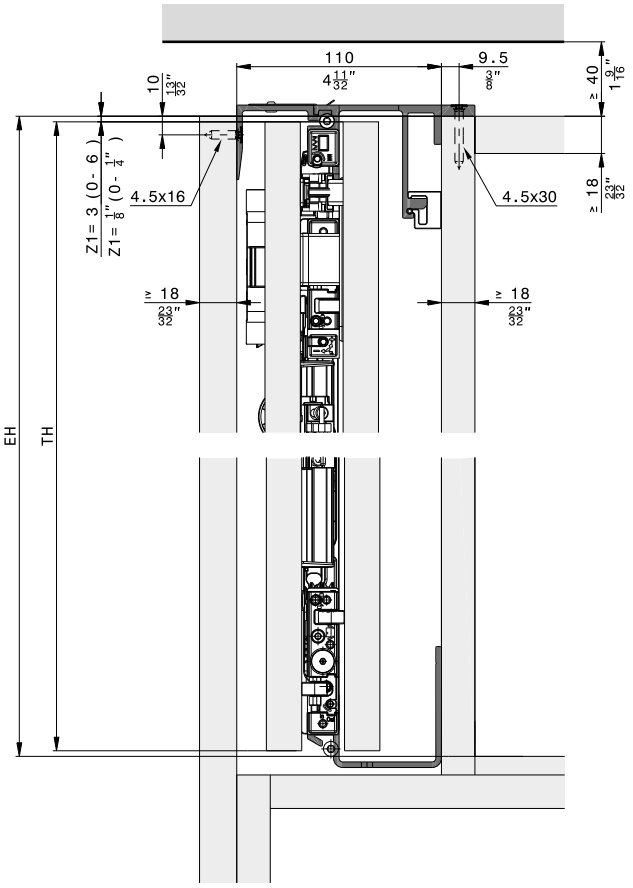

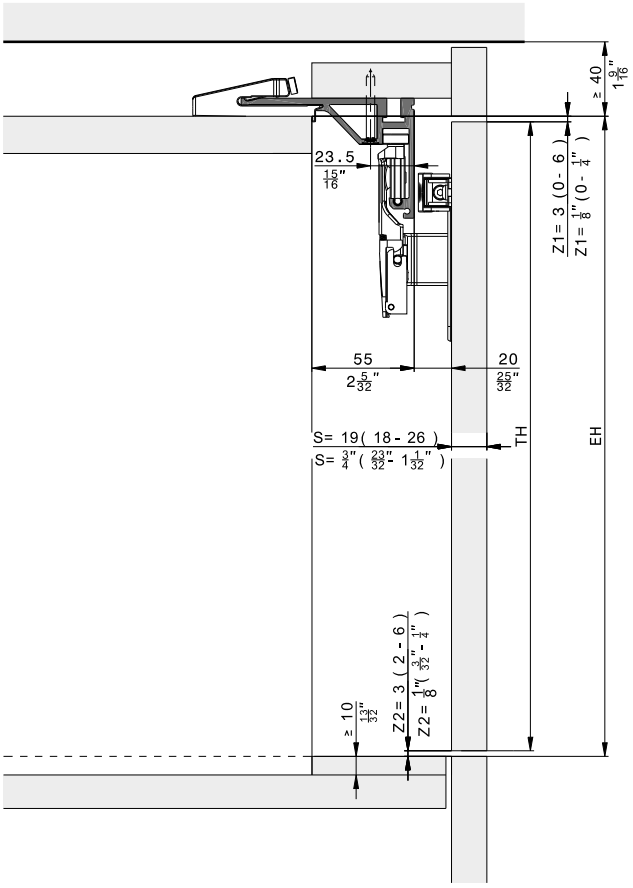


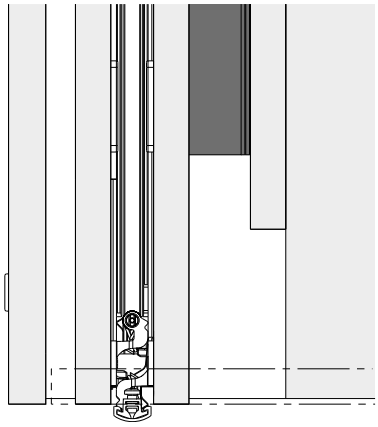


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Hardware depth calculation

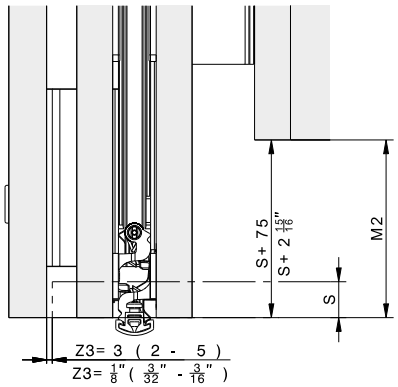
Flush door




Protruding door

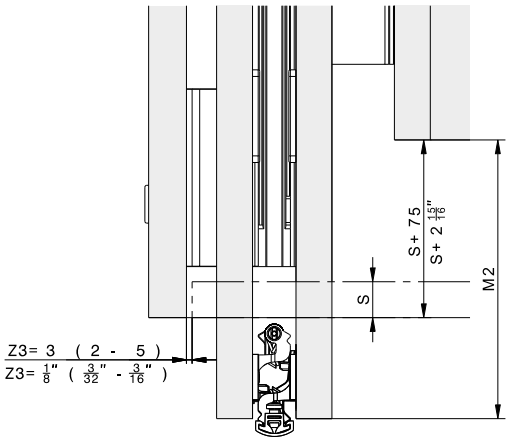

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

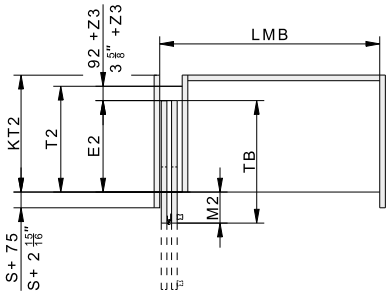

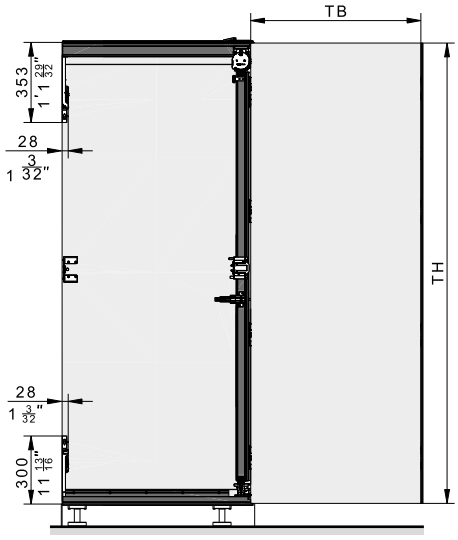

S = Door thickness
Z = Gap size
E2 = Slide-in depth
T2 = Hardware depth
TB = Door width
TH = Door height
KT2 = Cabinet depth
LMB = Inside clearance
M2 = Door projection over cabinet

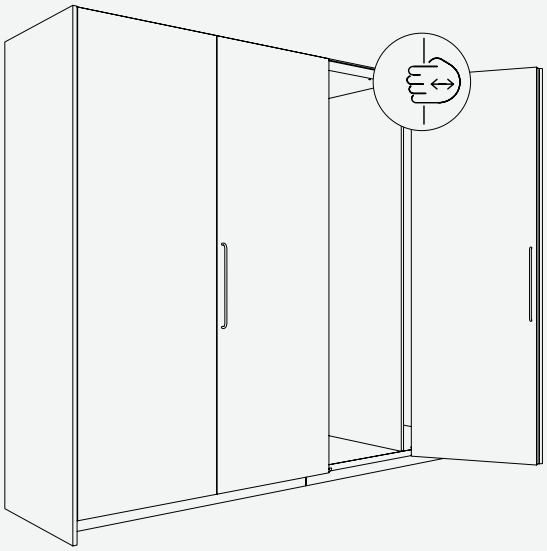
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

Flexibility Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of pre-assembly and intuitive adjustment

Comfort Opening and closing with very little effort – one hand is enough



Technical specifications

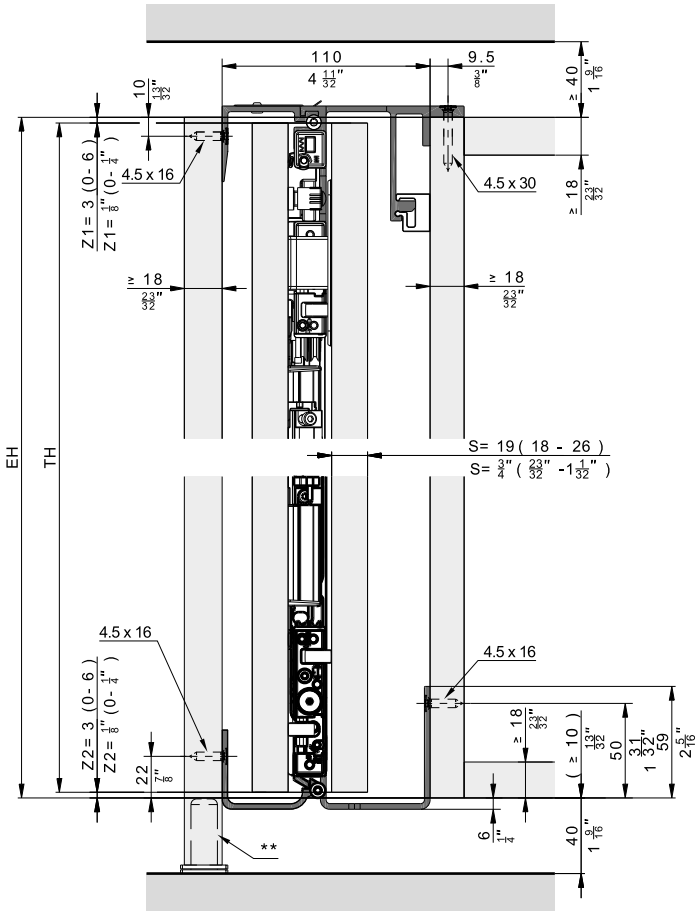
10–25 kg (22 to 55 lbs.)

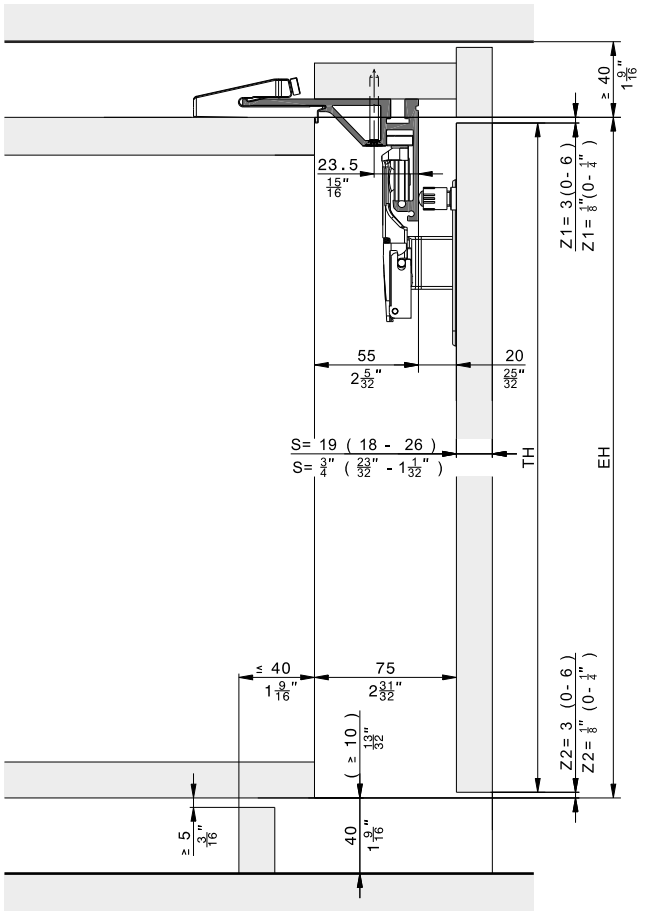
1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')

440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

18–26 mm (23/32'' to 1 1/32'')

Installation examples
Overlay door without base profile






** Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

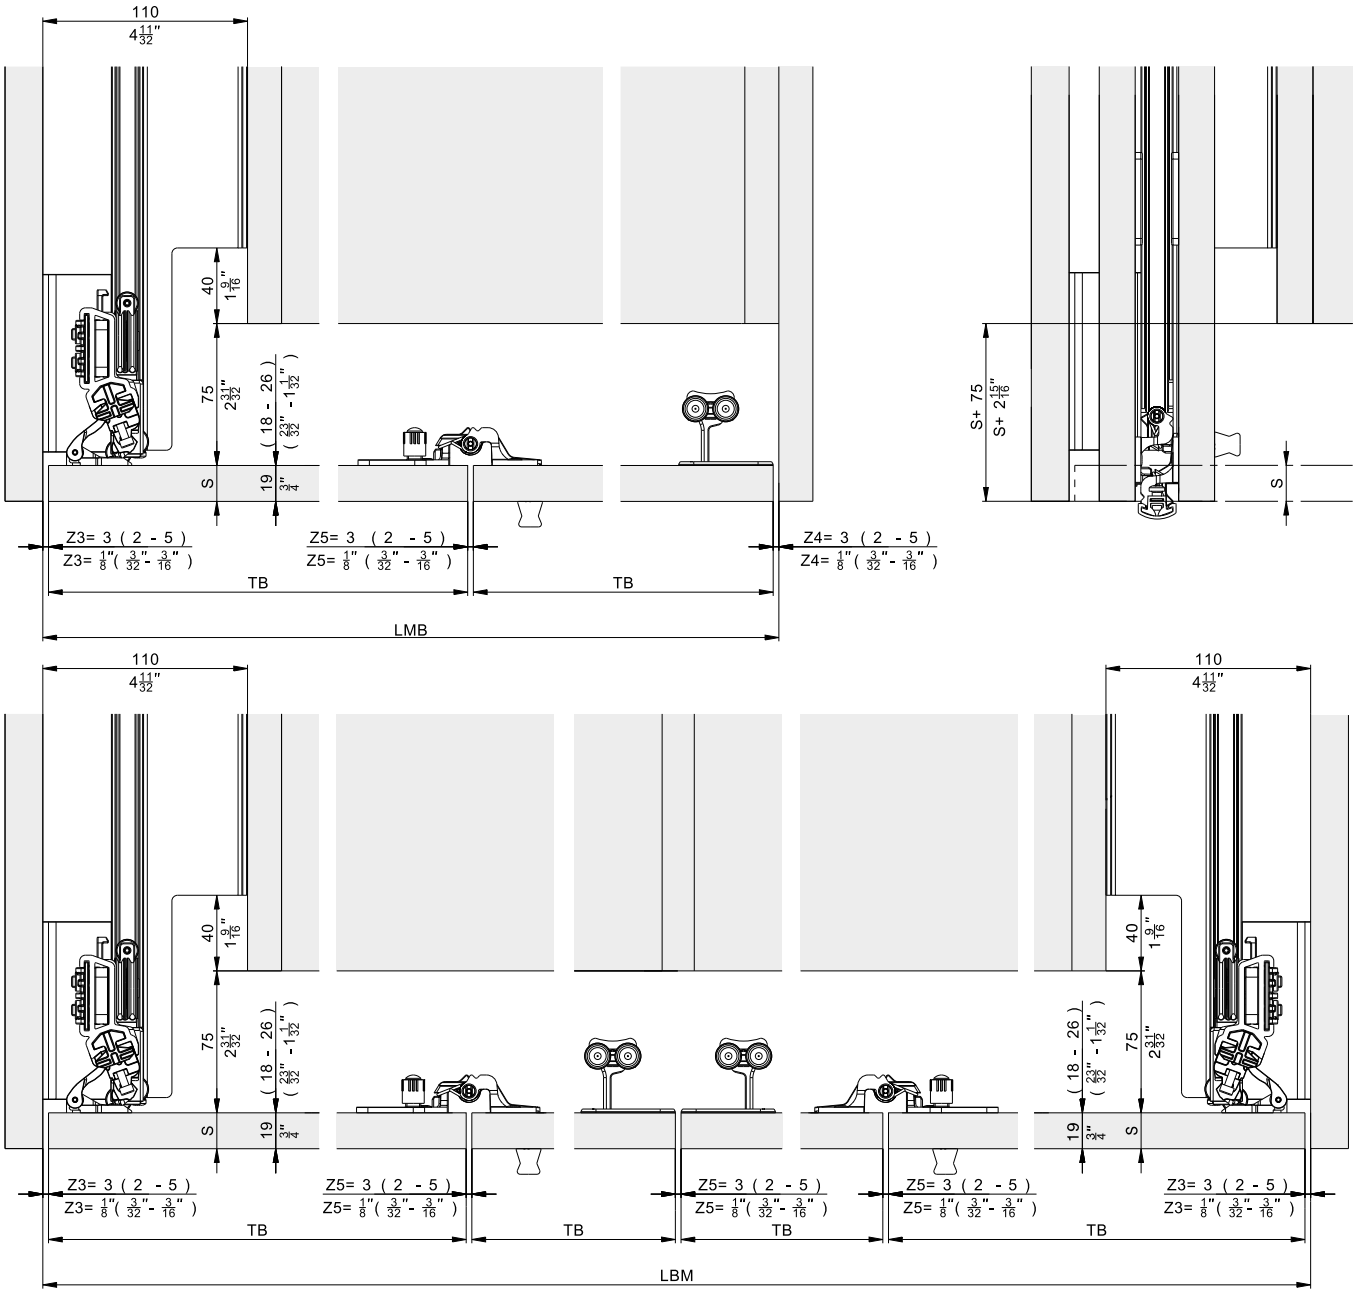Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527



Hawa Folding Concepta III 25 Pull, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527

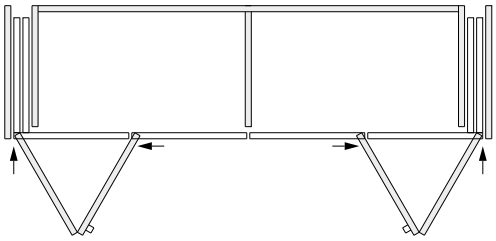for 4-door cabinets



Hawa Folding Concepta III 25 Pull, left/right

Aluminum, anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	2	31520

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	2	31527

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

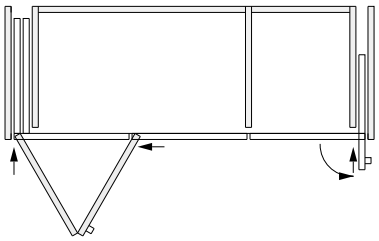for 3-door cabinets




Hawa Folding Concepta III 25 Pull, left with Hawa Concepta III 35 Pull, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16''to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16''to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

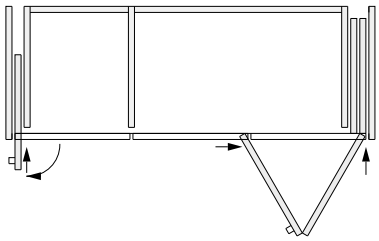

Hawa Folding Concepta III 25 Pull, right with Hawa Concepta III 35 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16''to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16''to 8' 10 5/16'')	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771
Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	31005


Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets




Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16''to 8' 10 5/16'')	31507

Set consisting of:		31507	No.
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	4	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set







	No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513

Set consisting of:		31512	31513	No.
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1		31004
	Pull end stop bracket, steel, zinc-plated	1	1	31541
	Slide-in securing mechanism, plastic, black	1	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right		1	31046

Subject to technical modifications. Metric specifications are exact. Inches are approximate.






Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized







	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520

Set consisting of:		31520	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

		31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6’ 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340

Continued table on next column







Table continued from previous column

	Running track curve, right, aluminum, anodized		1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right, L= 788 mm (2’ 7 1/32")		1	31371

Subject to technical modifications. Metric specifications are exact. Inches are approximate.






Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:		31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344






Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527

Set consisting of:		31527	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503





Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:		31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6’ 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2’ 8 9/32")	1		31336
	Connector, top left L= 788 mm (2’ 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16'')	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column


Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31340
	Running track curve, right, aluminum, black anodized		1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2’ 8 9/32")		1	31337
	Connector, top right, L= 788 mm (2’ 7 1/32")		1	31371


Reinforcement profiles

		No.
	Reinforcement profile for running track front, 2765 mm (9' 27/32''), 4 doors, aluminum, anodized	52109
	Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

		No.
	Routing jig for folding hinge	52121
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Straightening fitting
→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082

Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081


Automatic shut-off device
In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

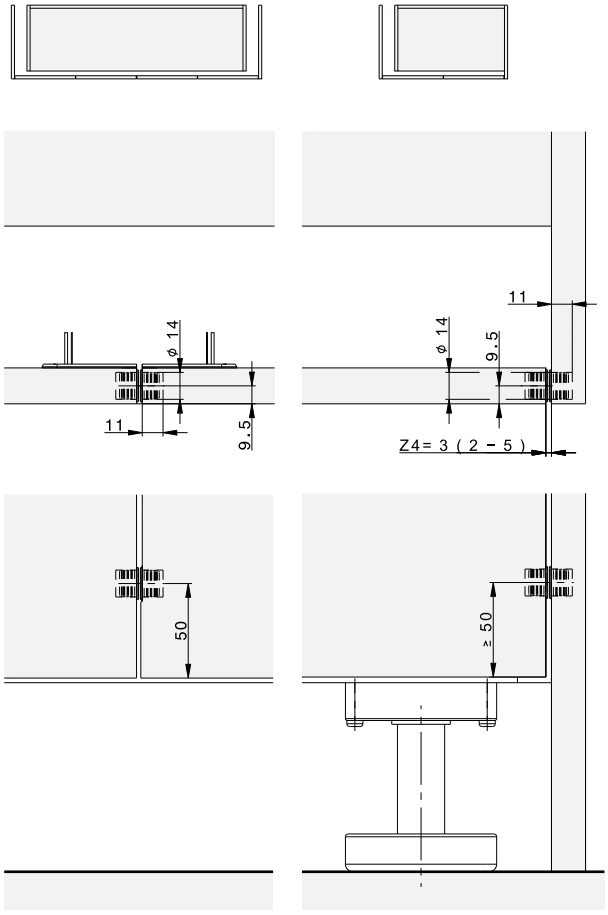Centering parts



Hawa Folding Concepta III 25 Pull

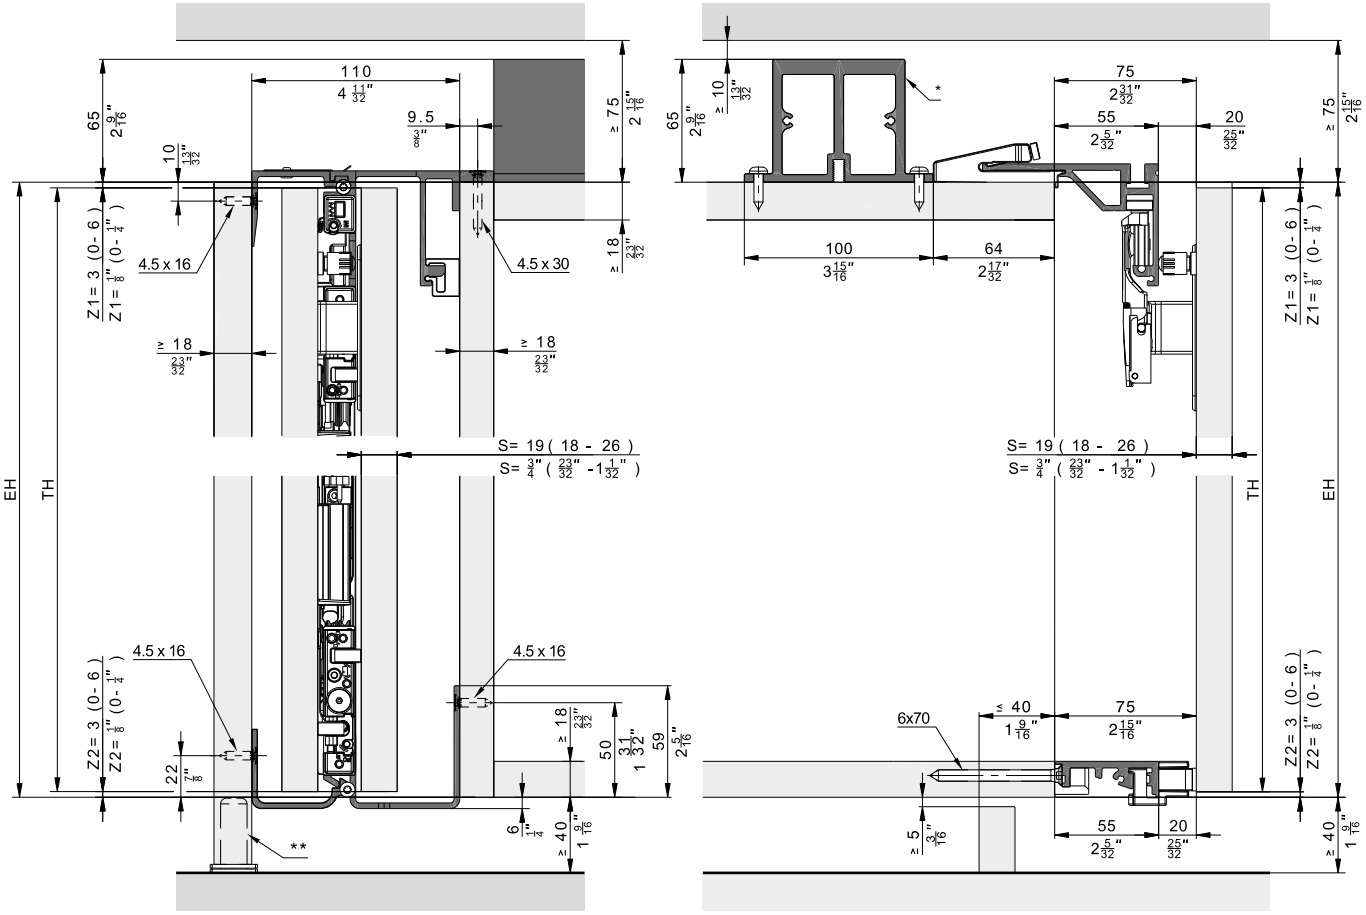
Further installation examples
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot


Subject to technical modifications. Metric specifications are exact. Inches are approximate.

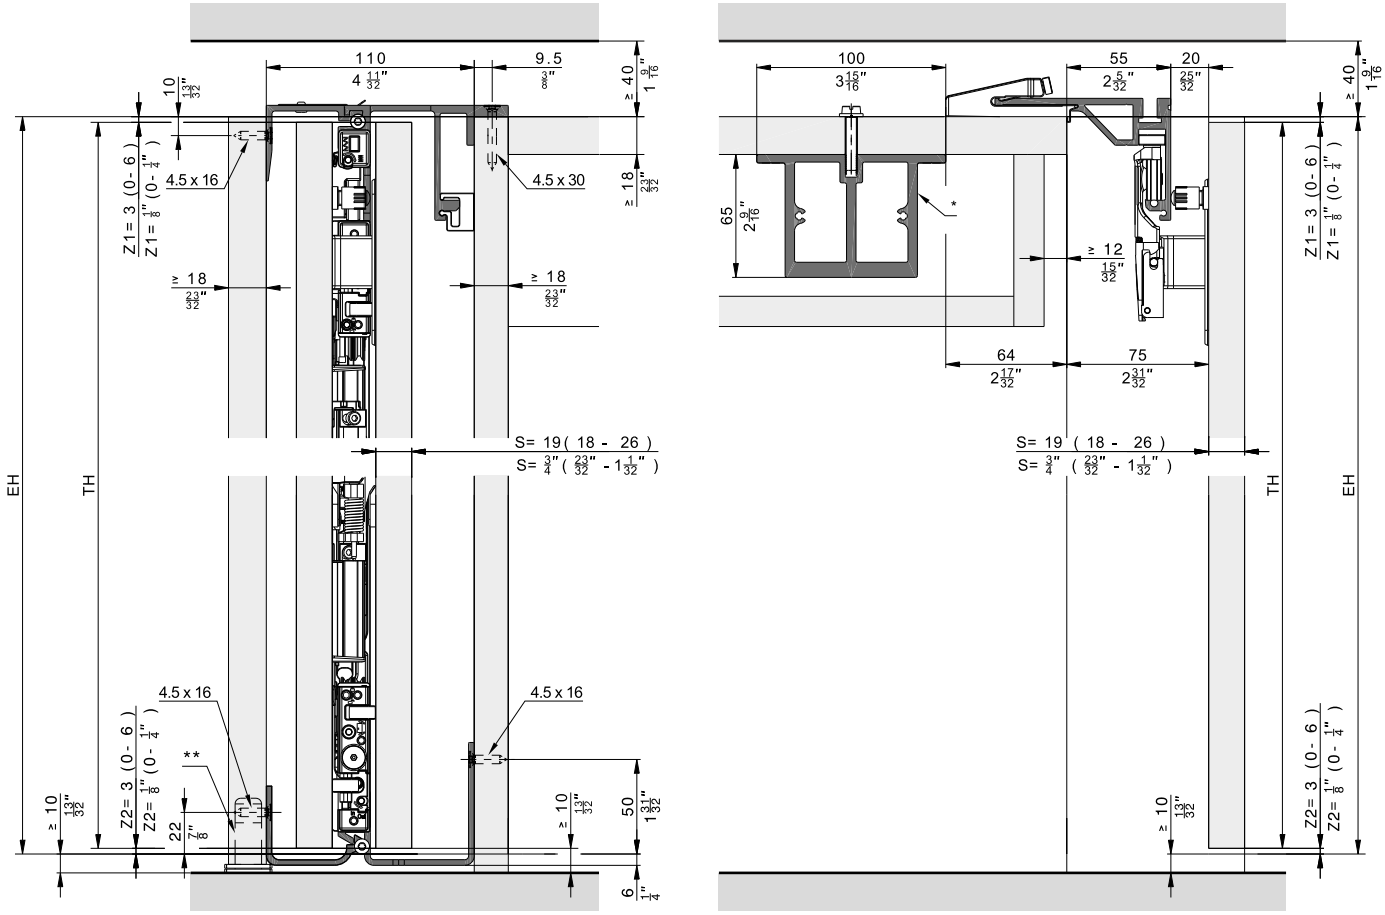Floor-to-ceiling doors without base panels, 2 doors and 4 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls
** Recommendation: Use adjustable foot

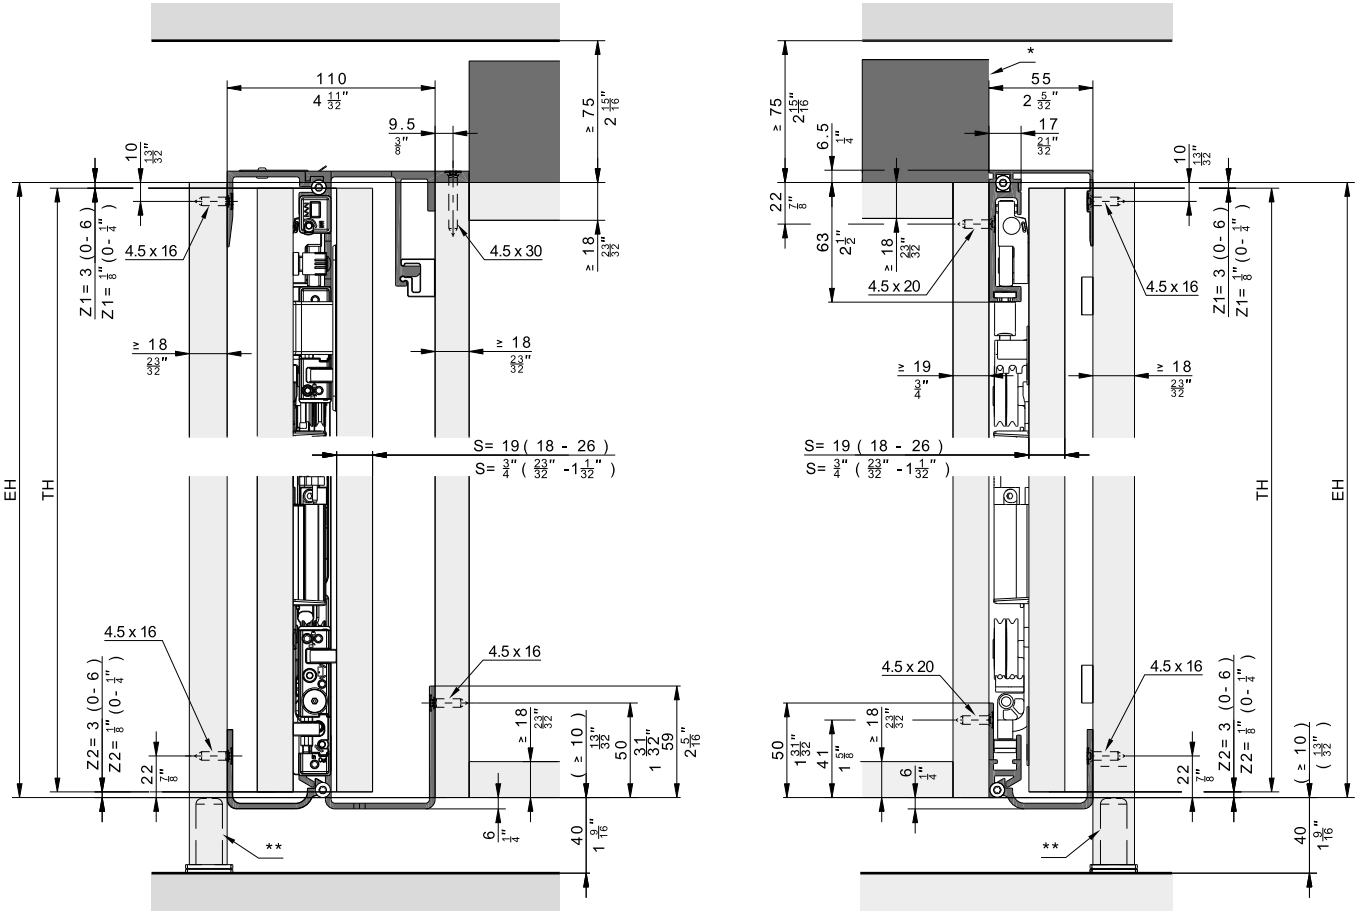Overlay door without base profile, 3 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

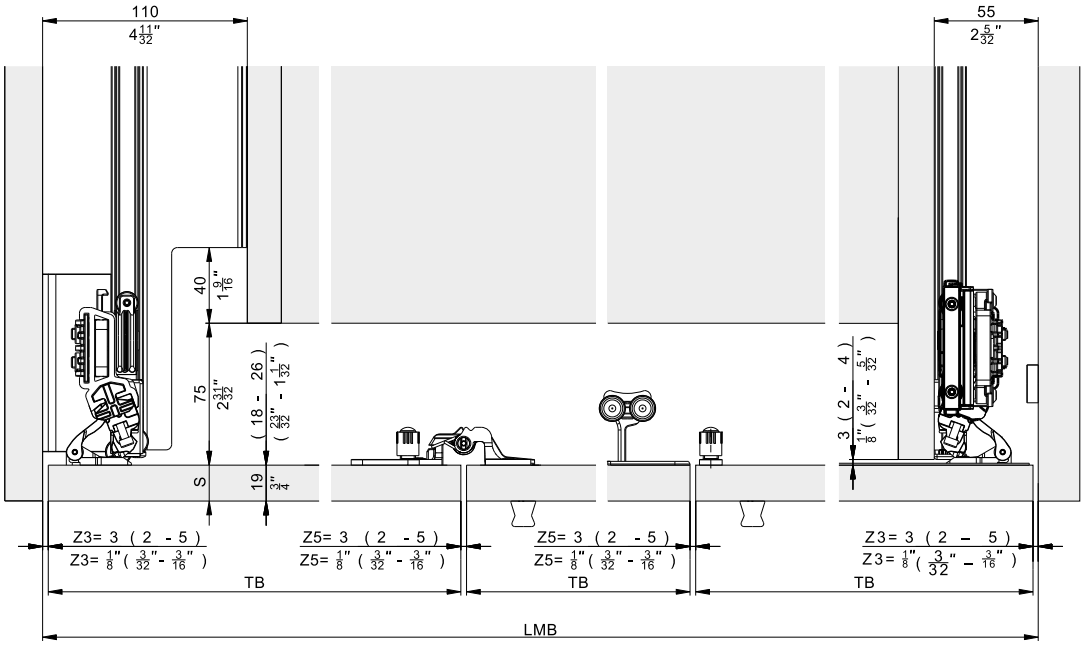
** Recommendation: Use adjustable foot




Subject to technical modifications. Metric specifications are exact. Inches are approximate.

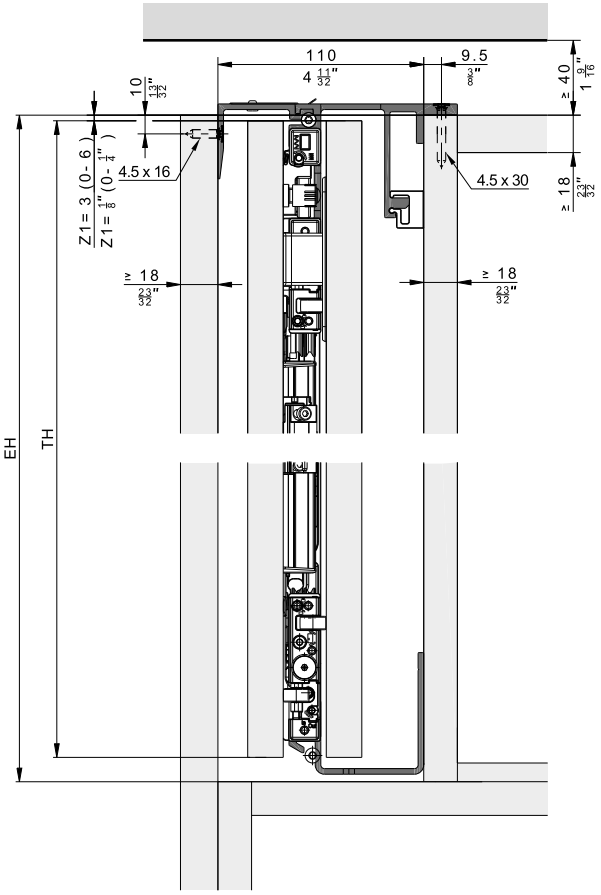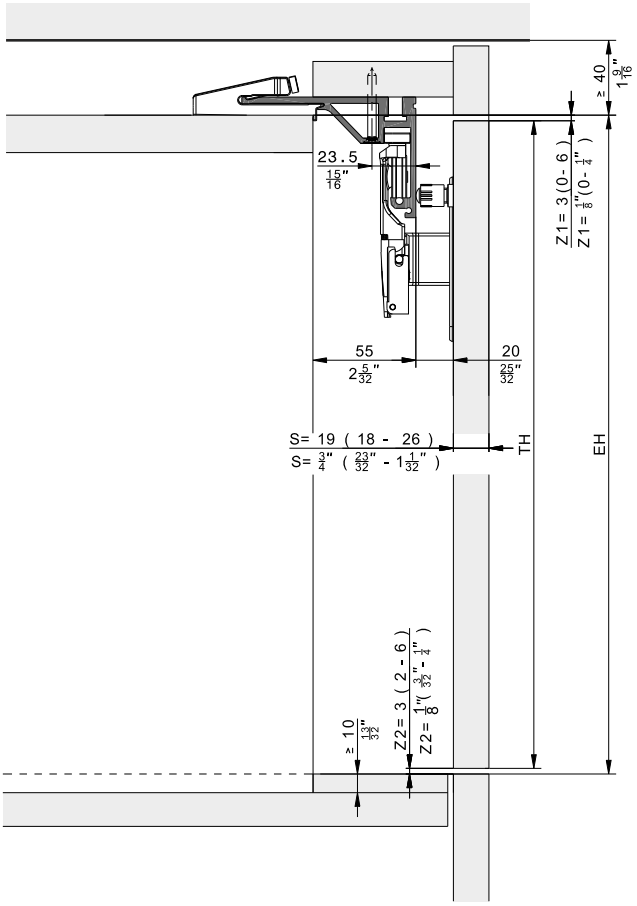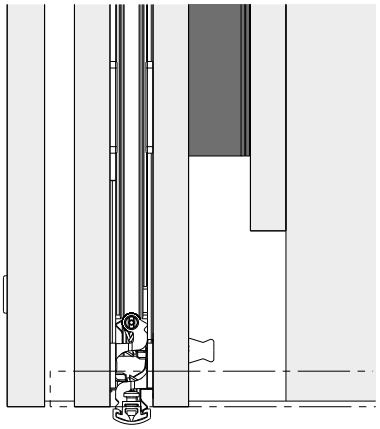Composed cabinet









Hardware depth calculation

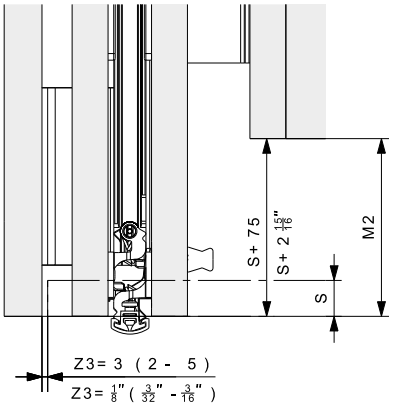
Flush door




Protruding door

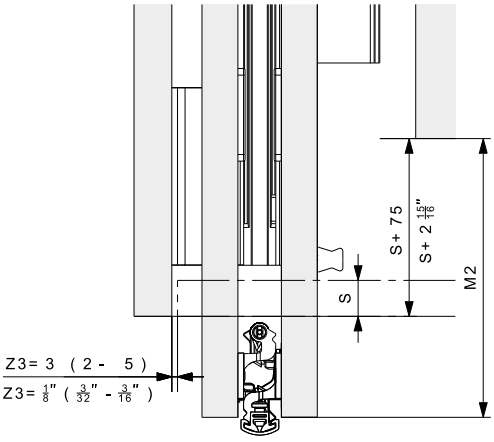

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

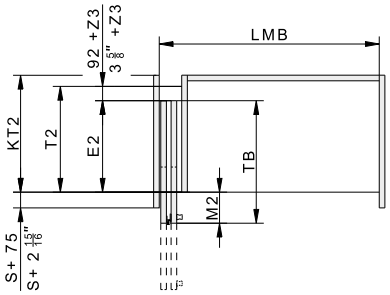

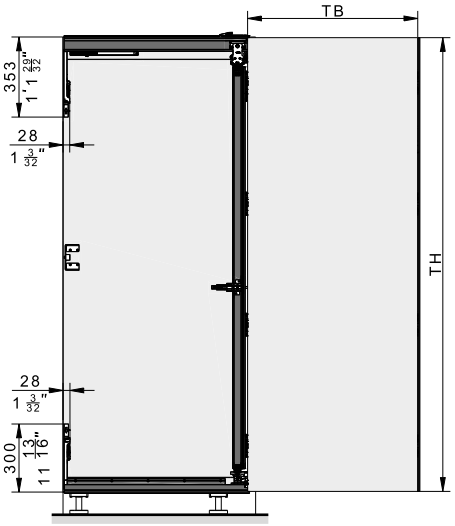

S = Door thickness
Z = Gap size
E2 = Slide-in depth
T2 = Hardware depth
TB = Door width
TH = Door height
KT2 = Cabinet depth
LMB = Inside clearance
M2 = Door projection over cabinet

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Visit us online

You will find more inspiration for our latest generation of pivot and folding/slide-in hardware at **hawa.com/concepta3-family**.

We would be pleased to advise you personally. Contact us at info@hawa.com or by phone on +41 44 787 17 17.

Subject to technical modifications. 789.0549.001/english 9/2025 © Hawa Sliding Solutions AG

Hawa Sliding Solutions AG
Untere Fischbachstrasse 4, 8932 Mettmenstetten, Switzerland
Tel. +41 44 787 17 17, info@hawa.com, www.hawa.com